



Submittal Data Sheet

Decoration Panel, Sensing Flow
BYCQ125B-W1



DESCRIPTION

The decoration panel attaches to the bottom of the cassette body and is the visible component of the FXFQ series round flow cassette.

FEATURES

- True 360° airflow distribution and three room sensors enables optimized occupant comfort and efficiency
- The infrared occupancy sensor and surface temperature sensor are built into the decoration panel to maintain comfortable temperature distribution in the room
- Individually controlled supply air louvers for comfortable air supply


SPECIFICATIONS

Model No.:	BYCQ125B-W1	
Components Included:	Decoration panel (including mounting screws, wiring harness, long life filter, thermal insulation, antisweat material and infrared floor and presence sensor) and installation manual	
Unit Compatibility:	VRV	FXFQ07TVJU, FXFQ09TVJU, FXFQ12TVJU, FXFQ15TVJU, FXFQ18TVJU, FXFQ24TVJU, FXFQ30TVJU, FXFQ36TVJU, FXFQ48TVJU
	Sky Air	FCQ18TAVJU, FCQ24TAVJU, FCQ30TAVJU, FCQ36TAVJU, FCQ42TAVJU, FCQ48TAVJU
Unit Weight:	12.2 lbs (5.5 kgs.)	
Dimensions (W x H x D):	37-3/8" x 2" x 37-3/8" (950 mm x 50 mm x 950 mm)	
Material / Finish:	Plastic / Fresh white (6.5Y 9.5/0.5)	
Airflow Configurations:	4-way and 3-way	
Filter:	Washable filter included as standard; KAFP551K160 (Quantity 1)	
Remote Sensor Kit:	KRCS01-4B	

Notes:

- 1) When installing infrared and presence sensor, ensure the correct field settings are applied for temperature settings.

DIMENSIONAL DRAWINGS

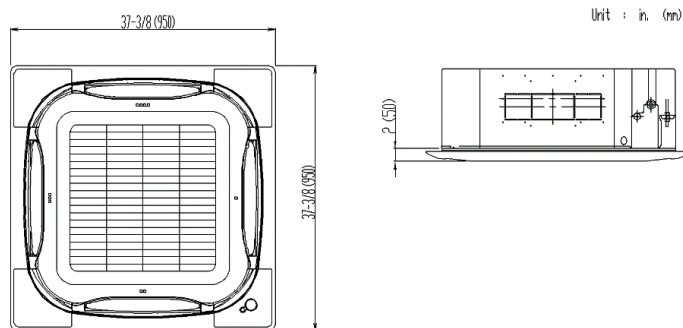

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056

www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations).