






# DAIKIN AURORA MULTI-ZONE HEAT PUMP SYSTEMS

1.5-3 TON, 2-4 ZONE SYSTEMS
Up to 21.7 SEER / Up to 12.5 HSPF /
Up to 12.7 EER
VARIABLE-SPEED, INVERTER,
COMPRESSOR

**Today, the air is perfect.** Perfect temperature. Perfect humidity. Perfectly clean and fresh, like just after a rainstorm. And the only thing more perfect than this outdoor scenario is that it's all happening inside. Because that's where we work. That's where we play, where we sleep, where we truly live.

And that's why at Daikin, we aim to make the air inside as refreshing as the outside. Better comfort. Better control and efficiency. Better quality. So you can create your own unique ecosystem. And everyday is perfect. **Inside and out.** 

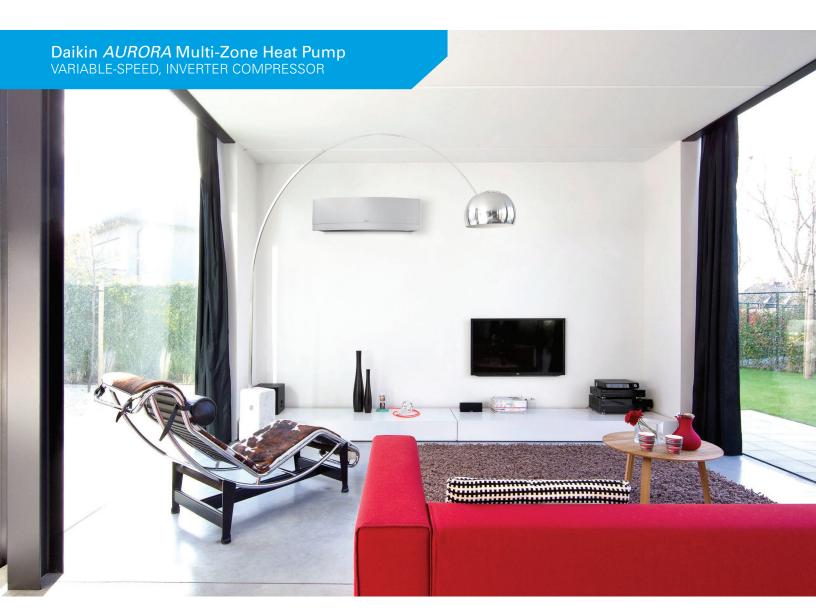

#### Perfecting The Air We Share

A better understanding of how people inhabit their living spaces has led to products designed to create indoor environments that help use energy resources more effectively. Heat pumps extract or reject heat from the outside air, even in cold weather. They use an electrically powered compressor and are extremely effective at

heating and cooling an apartment or a house. Daikin heat pumps are quiet and discreet, and use state-of-the-art technology to keep your energy bills low. With a Daikin heat pump, a large portion of the energy used to heat or cool your home comes from the outside air, a free and infinitely renewable resource.









#### Comfort

We offer a wide range of products, and always provide you with the ideal solution, whether for an apartment, condo or a house. Our units are whisper quiet and, with their specially designed airflow pattern, they create your ideal indoor climate.

Daikin units are designed to include features that let you create your own unique ecosystem. From the wide angle louver design and intelligent eye technology to the auto-swing and comfortable mode controller settings, effective heating and cooling is ensured throughout the space.

# Smart inverter technology

Integrated with a variable-speed inverter compressor, Daikin systems deliver the capacity required to maintain desired room conditions, typically reducing energy consumption by up to 30% or more (compared to traditional fixed-speed ducted systems). This technology minimizes temperature fluctuations and provides continuous cooling and heating comfort.

## **Energy efficiency**

Our products are designed to be highly efficient all year round, and their low energy consumption is reflected in low energy bills for you.

#### Control\*\*

Our expertise makes life easier for you, allowing you to control your system via a smartphone app\*\* or a user-friendly remote control.

#### Reliability

Daikin products are renowned for their reliability. And you can rely on outstanding limited warranties\* to match.



- \* Complete warranty details available from your local dealer/ contractor or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.
- \*\*Adaptor required.

# Daikin AURORA Multi-Zone Heat Pump Systems

# Designed for living: Solutions for hot and cold climates

Living in colder climates doesn't mean a heat pump isn't a viable option to heat each space in your home or business, nor does living in warmer climates preclude the use of a heat pump as a viable option for cooling. The outdoor units of this Multi-Zone Daikin *AURORA* heat pump system have been redesigned to withstand extreme weather conditions, even when it is down to -13°F WB (-25°C WB) or up to 115°F DB (46°C DB) for year round comfort.

#### Ideal solution for:

- >> Primary living areas (master bedrooms and living rooms)
- >> Hot or cold rooms
- >> Rooms with poor air flow
- >> Renovations and remodeling
- >> Basements, attics and garages
- >> New construction

#### Premium comfort features:

- Description Proof of the second of the se
- >> Advanced Filtration Long life, washable filters
- >>> **Enhanced Capacity** Delivers up to 100% rated cooling capacity at 115°F DB (46°C DB)

Delivers up to 80% higher cooling capacity at 115°F DB (46°C DB) when compared to a standard multi system\*

Up to 100% rated heating capacity at 5°FWB (-15°CWB) and continues to operate down to-13°FWB (-25°CWB)





<sup>\*2</sup>MXS18NMVJU with 2xFTXS09L = 10,880 Btu / Hr cooling capacity at 114.8°F. 2MXL18NMVJU with 2xFTXS09L = 19,590 Btu / Hr cooling capacity at 114.8°F.

# Compatible indoor units:



#### **EMURA**

Designed to perfectly balance technological capability and the beauty of aerodynamics

- >> Iconic award winning design and engineering excellence
- >> Elegant finish in pure matte white or modern silver
- >>> Two-area intelligent eye sensor controls comfort and allows for energy savings during unoccupied periods
- >> Titanium apatite photo-catalytic air purification



#### **VISTA**

Unique design that integrates seamlessly into the ceiling

- >> Iconic award wining design and engineering excellence
- >> Elegant finish in white or silver / white combination
- » DC fan motor and two optional intelligence sensors for energy efficiency
- Outside air integration possible of up to 2-3% of the nominal indoor air volume



#### **FTXS**

Discreet wall mounted unit providing high efficiency and comfort

- » Discreet, stylish front panel blends easily with the wall, and matches all interior decors
- » Dry program allows humidity levels to be reduced without variations in room temperature
- » Intelligent Eye function reduces heating or cooling operation during unoccupied periods



#### **FVXS**

Floor mounted unit for optimal heating comfort thanks to dual airflow

- >> Its low height enables the unit to fit perfectly beneath a window
- >> Can be installed against a wall or recessed
- >>> Vertical auto swing moves the louver up and down for efficient air and temperature distribution



#### **FDMQ**

Ducted Concealed Unit capable of up to .6 esp

- Higher external static pressure capabilities allow for longer duct runs and easily implementing high MERV filtration with appropriate transitions
- Drain pan inspection port makes it easy to observe installation flexibility
- » Outside air integration possible



#### FDXS/CDXS

Slim Ducted Concealed Ceiling Unit capable of up to 0.18 esp

- >> External static pressure facilitates unit's use with minimal length of duct runs
- Discretely concealed in the ceiling: only the suction and discharge grills are visible
- >> DC fan motor for low energy consumption
- >> Outside air integration possible



## Flexible options providing high efficiency and comfort

The Daikin AURORA Multi-Zone System is a flexible solution for individual zone comfort. Connecting up to 4 indoor units to a single outdoor unit reduces installation space and costs while maximizing comfort and energy efficiency. With a choice of indoor unit types in a wide range of capacities, Daikin Multi-Zone Systems allow mix and matched combinations. Whether your rooms are large or small, Daikin units have the capacities to provide the climate you want and which suit your budget.



#### Outdoor unit features:



**Outdoor Unit Quiet Operation** can reduce sound levels by 3dB for times when quieter operation is needed.



**Auto-Restart mode** allows the unit to memorize the operation mode, airflow and temperature settings. Should there be a power failure when the unit is in operation, it will automatically return to the same operating conditions when the power is restored.



Intelligent Defrost Mode\* – The outdoor unit will enable this mode to help prevent frost/ice from building up in cold climate conditions. It will also help with longer heating operation time for additional comfort for occupants (compared to HVAC systems without this function).

\*Available on 4MXL only





### Optimized drain pan

» Newly designed drain pan on outdoor unit to help prevent condensate from freezing and causing damage to the fan and coil



Note: 4MXL drain pan shown

# Knowledge is power

In general, system performance is measured by a higher Seasonal Energy Efficiency Ratio (SEER) and Energy Efficiency Ratio (EER). Higher ratings mean lower operating costs. Similarly, a higher rated Heating Seasonal Performance Factor (HSPF) and Coefficient of Performance (COP) means a more efficient air-source heat pump.

| Up to       | Up to              |
|-------------|--------------------|
| 21.7        | 12.7               |
| SEER        | EER                |
| Up to       | Up to              |
| 12.5        | 4.26               |
| <b>HSPF</b> | COP                |
|             | (Non-ducted units) |

Multi-Zone *AURORA* Heat Pump Efficiency Ratings

To learn more about potential rebates and incentives in your area, please visit our rebate center at www.daikincomfort.com/rebates.




# You're always in control.

#### Individual comfort and control

Daikin systems have an available infrared remote controller allowing you to access all functions at the click of a button.

## From anywhere in the world. Or your living room.



\* Requires purchase and installation of BRP072A43, AZAI6WSCDKA, or AZAI6WSCDKB Wi-Fi adaptors depending on the indoor unit. Features vary by adaptor. See each adaptor's product flyer for more information.

#### **NEW!** Daikin *Madoka* Remote Controller



Daikin is pleased to introduce the *Madoka* remote controller for the North American FDMQ and FFQ (P1P2) indoor units. The *Madoka* features a sleek and stylish design with an intuitive interface including touch button control. It retains advanced functions

for indoor unit control. It can be commissioned and managed with ease through a Bluetooth® configuration app or via the onboard menus. The *Madoka* provides 3 configurable display modes: Text (default), Icon, and Scale to help meet project and occupant needs. Learn more at www.daikinac.com.







# Coming Soon!

# Daikin Adaptive Touch Controller



The Daikin Adaptive Touch Controller (ATC) is used to control FDMQ and FFQ (P1P2) indoor units with advanced and configurable control logic. The ATC comes in 4 different models with a built-in temperature sensor, humidity sensor, CO<sub>2</sub> sensor, and occupancy sensor. The

ATC will also provide analog input, analog output, digital input, and digital output terminals to monitor auxiliary sensors and control auxiliary equipment. The built-in sensors can be combined with advanced logic to create actionable tasks based upon the sensor values. The ATC controller can be integrated with a compatible building management system (BMS) using  $BACnet^{\mathsf{TM}}$  MS/TP.

# **NEW!** Daikin DKN Plus Interface



The new Daikin DKN Plus Interface (AZAI6WSPDKC) enables the energy-efficient control of Daikin air conditioners by a third-party thermostat or an automation system. With this interface, third

party devices or systems can control the Single-Zone and Multi-Zone indoor units through the DKN Cloud NA App via Wi-Fi, Cloud API, Modbus®, BACnet™ MS/TP, or thermostat relay contacts. This interface can be commissioned easily through the DKN Cloud NA app via Bluetooth® Low Energy (BLE). Learn more at www.daikinac.com.

# NEW! Daikin One+ Smart Thermostat



The Daikin *One*+ smart thermostat is now available for single and multizone indoor unit models. With the new translation adaptor, connecting

the Daikin *One*+ smart thermostat provides several user features including remote monitoring, control and geofencing using the Daikin *One* home app, *Google*, and *Amazon* voice assistants. Learn more at www.daikinone.com.

\*\* Note that the handheld remote that comes with some indoor units should not be used together with the Daikin *One*+ smart thermostat.



# **SPECIFICATIONS**

| <b>Outdoor Units</b> | 2-Port (2MXL18QMVJUA)                      |             | IUA) AHRI# 3-Port (3MXL24RMV) |                                  | AHRI#     | 4-Port (4MXL36TVJU)                 |             | AHRI#     |
|----------------------|--|-------------|-------------------------------|----------------------------------|-----------|-------------------------------------|-------------|-----------|
| Non-Ducted           | 17 SEER / 12.7 EER /<br>10.3 HSPF          | ENERGY STAR | 205663354                     | 18.0 SEER / 12.7 EER / 12.5 HSPF | 205663358 | 21.7 SEER / 12.5 EER /<br>11.2 HSPF | ENERGY STAR | 202521824 |
| Ducted               | 14 SEER / 10.1 EER / 8.2 H                 | HSPF        | 205663355                     | 14.0 SEER / 9.9 EER / 8.2 HSPF   | 205663359 | 16.9 SEER / 11 EER / 9              | 9.1 HSPF    | 202522139 |
| Mixed                | 15.5 SEER / 11.4 EER / 9.25 HSPF 205663369 |             | 205663365                     | 16 SEER / 11.3 EER / 10.35 HSPF  | 205663367 | 19.3 SEER / 11.75 EER / 10.15 HSPF  |             | 202522140 |

| Outdoor Units | 2-Port (2MXL18QM                  | VJU)        | AHRI#   | 3-Port (3MXL24RM                    | AHRI#       |           |
|---------------|-----------------------------------|-------------|---------|-------------------------------------|-------------|-----------|
| Non-Ducted    | 17 SEER / 12.7 EER /<br>10.3 HSPF | ENERGY STAR | 8849535 | 18.0 SEER / 12.7 EER /<br>12.5 HSPF | energy STAR | 201851577 |
| Ducted        | 14 SEER / 10.1 EER / 8.2 HSPF     |             | 8849534 | 14.0 SEER / 9.9 EER / 8.2           | 201851578   |           |
| Mixed         | 15.5 SEER / 11.4 EER / 9.25 HSPF  |             | 8849536 | 15.95 SEER / 11.3 EER / 10.35 HSPF  |             | 201851582 |

| Indoor Units / Dimensions | Unit Class |                           |                          |                            |                   |                           |  |  |
|---------------------------|------------|---------------------------|--------------------------|----------------------------|-------------------|---------------------------|--|--|
| (HxWxD)                   | 07         | 09                        | 12                       | 15                         | 18                | 24                        |  |  |
| EMURA (Wall Mount)        |            | FTXR09TVJUW/S             | FTXR12TVJUW/S            |                            | FTXR18TVJUW/S     |                           |  |  |
|                           |            | 11-15/16 x 3              | 9-5/8 x 8-3/8            | 11-15/16 x 39-5/16 x 8-3/8 |                   |                           |  |  |
| VISTA (Ceiling Cassette)  |            | FFQ09Q2VJU                | FFQ12Q2VJU               | FFQ15Q2VJU                 | FFQ18Q2VJU        |                           |  |  |
|                           |            |                           | 10-1/4 x 22-5/8 x 22-5/8 |                            |                   |                           |  |  |
| ETVO VAV. II A A          | CTXS07LVJU | FTXS09LVJU                | FTXS12LVJU               | FTXS15LVJU                 | FTXS18LVJU        | FTXS24LVJU                |  |  |
| FTXS Wall Mount           |            | 11-5/8 x 31-1/2 x 8-7/16  |                          | 13-3/8 x 41-5/16 x 9-3/4   |                   |                           |  |  |
| FVXS Floor/Low Wall Mount |            | FVXS09NVJU                | FVXS12NVJU               | FVXS15NVJU                 | FVXS18NVJU        |                           |  |  |
|                           |            |                           |                          |                            |                   |                           |  |  |
| FDMQ Ducted Concealed     |            | FDMQ09RVJU                | FDMQ12RVJU               | FDMQ15RVJU                 | FDMQ18RVJU        | FDMQ24RVJU                |  |  |
|                           |            | 9-5/8 × 27-9              | /16 × 31-1/2             |                            |                   |                           |  |  |
| FDXS/CDXS Slim Duct       | CDXS07LVJU | FDXS09LVJU                | FDXS12LVJU               | CDXS15LVJU                 | CDXS18LVJU        | CDXS24LVJU                |  |  |
|                           |            | 7-7/8 x 27-9/16 x 24-7/16 |                          | 7-7/8 x 3                  | 35-7/16 x 24-7/16 | 7-7/8 x 43-5/16 x 24-7/16 |  |  |



Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet **ENERGY STAR**® criteria. Ask your contractor for details or visit www.energystar.gov.



Use of the AHRI Certified® mark indicates a manufacturer's participation in the certification program. For verification of certification for individual products, go to www.ahridirectory.org



#### **About Daikin:**

Daikin Industries, Ltd. (DIL) is a global Fortune 1000 company which celebrated its 95th anniversary in May 2019. The company is recognized as one of the largest HVAC (Heating, Ventilation, Air Conditioning) manufacturers in the world. DIL is primarily engaged in developing indoor comfort systems and refrigeration products for residential, commercial and industrial applications. Its consistent success is derived, in part, from a focus on innovative, energy-efficient and premium quality indoor climate and comfort management solutions.

# NEW! Daikin SplitXpress Selection Tool

The new interactive *SplitXpress* mobile app and website provide a complete product selection tool to streamline system selection for single and multi-zone projects. Users can create equipment selections and add accessories / pricing details to quickly share quotes with customers. Available for free on the *App Store* (iOS) and *Google Play* (Android), and at https://splitxpress.daikincity.com.







#### **WARNINGS:**

- Always use a licensed installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Use only those parts and accessories supplied or specified by Daikin. Ask a licensed contractor to install those parts and accessories. Use of unauthorized parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Read the User's Manual carefully before using this product. The User's Manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.
- >> For any inquiries, contact your local Daikin sales office.

App Store is a registered trademark of Apple Inc.

Google Play and the Google Play logo are trademarks of Google LLC.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks are under license.

BACnet™ is a trademark of ASHRAE.

Modbus® is a registered trademark of Schneider Electric USA, Inc.

# Canada ENER CUIDE Seasonal Energy Efficiency Ratio (SEER) Ductless heat pump THIS MODEL 14.0-21.7 14.0 — Uses least energy 42.0

#### ADDITIONAL INFORMATION

Before purchasing this appliance, read important information about its estimated annual energy consumption, yearly operating cost, or energy efficiency rating that is available from your retailer.

