


| | |
|-----------|--|
| Job Name: | |
| Tag# | |



| | |
|--------------------------------------|-------------------|
| Submittal Data Sheet | FDXS09LVJU |
| .75-Ton Ducted Concealed Indoor Unit | |

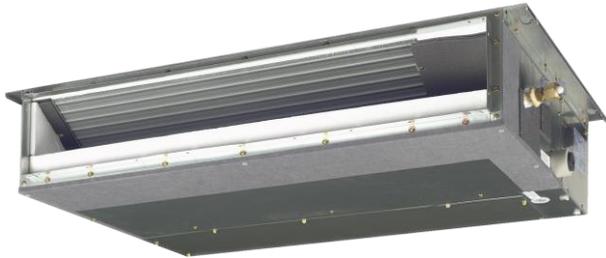

Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*


| Indoor Specifications | | | | |
|-----------------------------|---------------------------|-----|--------------|-----|
| | Cooling | | Heating | |
| | H | M | H | M |
| Airflow Rate (cfm) | 305 | 280 | 305 | 280 |
| | L | SL | L | SL |
| | 260 | 235 | 260 | 235 |
| Sound (dBA) H / M / L | 35 / 33 / 31 | | 35 / 33 / 31 | |
| Dimensions (H x W x D) (in) | 7-7/8 x 27-9/16 x 24-7/16 | | | |
| Weight (Lbs) | 47 | | | |
| Nominal Capacity (Btu/hr) | 9,000 | | | |

*See Outdoor Unit for Rated Capacities




| Electrical | | | *208/230V |
|-------------------------------|----------|----------|-----------|
| | Cooling | Heating | |
| Running Current (Rated) (A) | .58/.52* | .58/.52* | |
| Power Consumption (Rated) (W) | 72/72* | 72/72* | |

| Piping | |
|-------------|-------|
| Liquid (in) | 1/4 |
| Gas (in) | 3/8 |
| Drain (in) | 25/32 |

FDXS09LVJU Dimensional Data

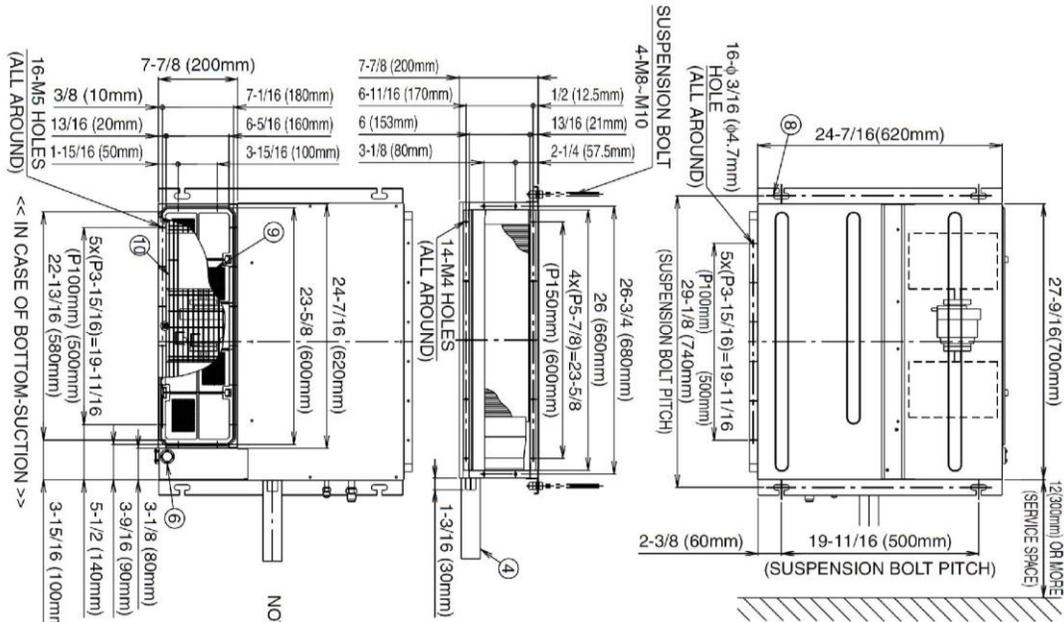

NOTE) 1. IN CASE OF BACK-SUCTION MOUNT CHAMBER COVER TO BOTTOM SIDE OF THE UNIT.
 2. LOCATION OF UNIT'S NAME PLATE: CONTROL BOX COVER
 3. MOUNT THE AIR FILTER AT THE SUCTION SIDE (SELECT ITS COLOR/METHOD (GRAVITY METHOD) 50% OR MORE.
 IT CAN NOT BE EQUIPPED WITH AIR FILTER (ACCESSORY) WHEN CONNECTING DUCT TO SUCTION SIDE.
 4. PIPE SPECIFICATION

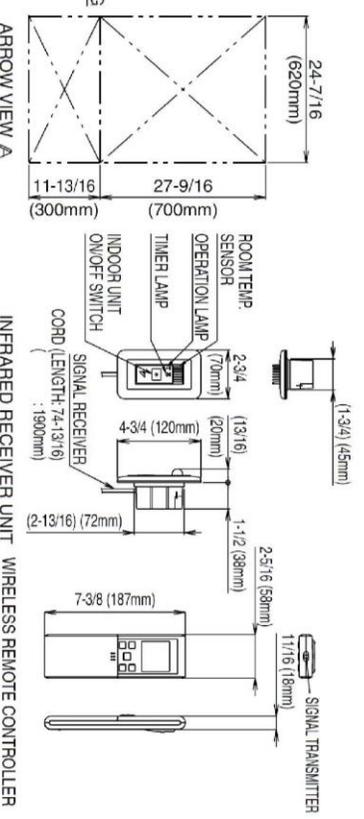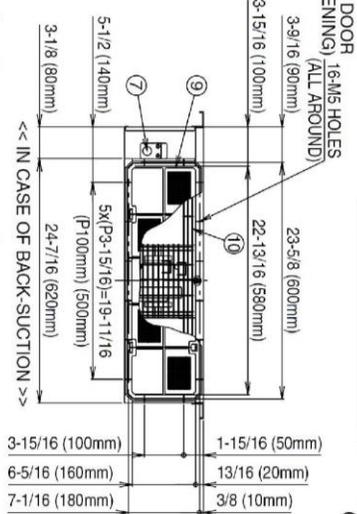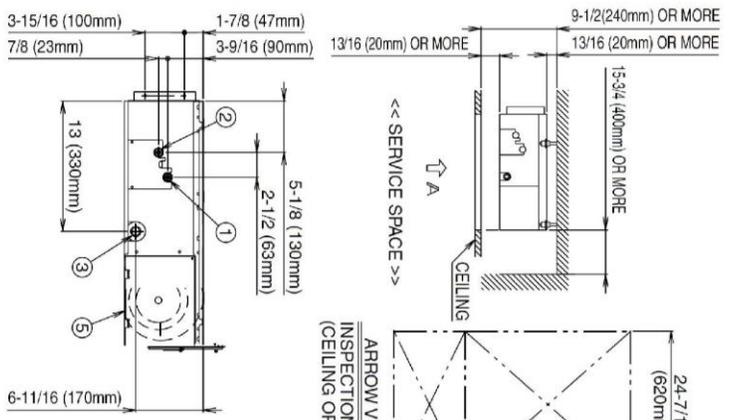


| NUMBER | NAME | DESCRIPTION |
|--------|-----------------------------------|---|
| 10 | PROTECTION NET | |
| 9 | AIR FILTER (ACCESSORY) | |
| 8 | SUSPENSION BRACKET | |
| 7 | POWER SUPPLY CONNECTION | |
| 6 | INFRARED RECEIVER UNIT CONNECTION | |
| 5 | CONTROL BOX | |
| 4 | DRAIN HOSE (ACCESSORY) | 1.D. φ31/32(φ25mm) (OUTLET) |
| 3 | SOCKET FOR DRAIN | VP20 (O.D. φ1-1/32 (φ26mm)/I.D. φ25/32 (φ20mm)) |
| 2 | GAS PIPE CONNECTION | φ3/8 (φ9.5mm) (FLARE CONNECTION) |
| 1 | LIQUID PIPE CONNECTION | φ1/4 (φ6.4mm) (FLARE CONNECTION) |

3D074619

| Included | Part Number | Description |
|----------|-----------------|---|
| | AZAI6WSCDKB | DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21) |
| | AZAI6WSPDKC | DKN Plus Interface |
| | DTST-ONE-ADA-A | Daikin <i>One+</i> Smart Thermostat for Ductless Products |
| | BRC944B2 | Wired Remote Controller |
| | BRCW901A08 | Wired Remote Controller Cable – 25ft |
| | BRCW901A03 | Wired Remote Controller Cable – 10ft |
| | DACA-ARCW901P10 | IR Receiver Cable, Plenum Rated, 10ft |
| | DACA-ARCW901P25 | IR Receiver Cable, Plenum Rated, 25ft |
| | DACA-CP2-1 | Maxi Orange Condensate Pump |
| | DACA-CP3-1 | Mini Condensate Pump 5 gph |
| | KRP928BB2S | Interface Adaptor for DIII-NET |

External Static Pressure / Airflow Chart

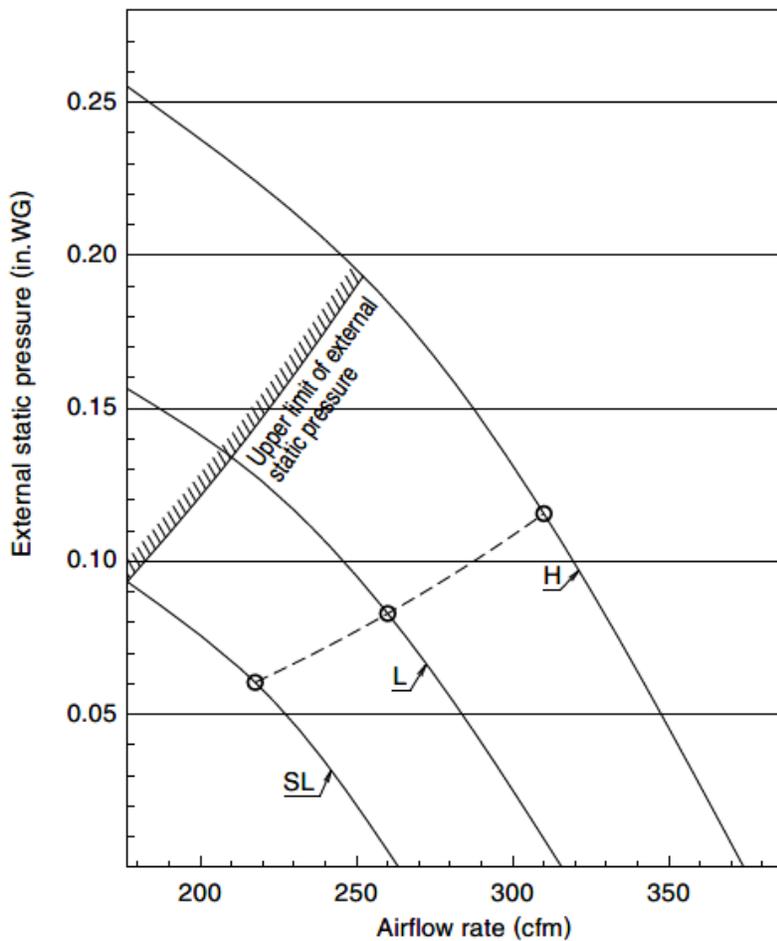

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)