



Delta Pack

Ready to install

sauermann®

The performance of our Si-10 with ducting for install next-to the air conditioning unit.

SUITABLE FOR

- Up to 5.5 tons
- Wall mounted units

PERFORMANCE

- 5 gph max. flow
- 33' max. discharge



✓ Key features

- High performing
- Easy installation
- Reversible mounting

Delta Pack tech specs

MAX. FLOW RATE: 5.0 gph

MAX. DISCHARGE HEAD: 33ft; flow rate = 1 gph

MAX. PRESSURE: 46ft; flow rate = 0 gph

SOUND LEVEL AT 3.3FT: 23 dBA according to EN ISO 3744 (Measured at LNE lab, pump operating with water, out of application)

POWER SUPPLY: 120 V ~ 60 Hz - 14 W (DP10UL01UN12)
230 V ~ 50/60 Hz - 14 W (DP10UL01UN23)

INSULATION CLASS: Double Insulation ☐

DETECTION LEVELS: On: $2\frac{23}{32}$ " • Off: $1\frac{15}{32}$ " • Safety: $1\frac{13}{16}$ "

SAFETY SWITCH: NC 8A resistive - 250 V

THERMAL PROTECTION: 240°F auto-reset

OPERATING CONDITIONS: 70%: 3s ON - 1s OFF

COVER DIMENSIONS: L $6\frac{1}{2}$ " x W $6\frac{1}{2}$ " x H $2\frac{3}{8}$ "

DUCT DIMENSIONS: L 30" x W 3" x H $2\frac{3}{8}$ "

SAFETY STANDARDS: UL / CSA certified by Intertek


RoHS & WEEE DIRECTIVES: Compliant

PACKAGING: 3.3 lbs - L $30\frac{1}{4}$ " x W $7\frac{9}{32}$ " x H $2\frac{3}{4}$ "

MASTERPACK: 10 pieces




Actual flow rates (GPH)

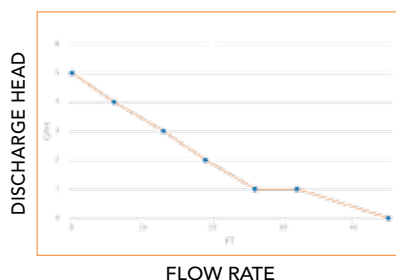

FLOW RATE



Sound level

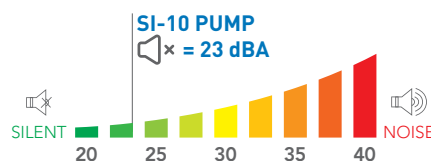

Recommended accessories



Clear PVC hose, 1/4" i.d.

- ACC 00105: 16ft roll • ACC 00150: 164ft roll
- ACC 00151: Reinforced, 164ft roll



Self-sealing fitting to connect discharge tube to drain pipe.

- 6 pcs, for 1/4" i.d.



Anti-siphon fitting

- ACC 00216: 5 pcs, for 1/4" i.d.

What's in the box



- Si-10 piston pump
- 5' power cable: 2 power wires, 2 safety contact wires
- Anti-vibration mounting bracket
- Pump cover
- 30" of ductline
- 20" of rubber tubing
- Rubber joint for junction with the AC unit:
 - Ceiling duct cover
 - 3 tie wraps
 - 4 screws, 4 wall anchors, & 2 washers



SCAN THIS QR CODE
FOR ADDITIONAL
DELTA PACK
TECHNICAL INFORMATION