



100% MADE IN THE USA



TwinGel PREINSULATED COPPER LINE SETS

APPLICATIONS

Lines are machinery attached one to the other for faster and easier install. It provides the perfect size combination for both suction and liquid lines to fit every air conditioning, such as ductless mini-splits, VRF, heat pumps and unitary systems.

TECHNICAL SPECS

INSULATION

Polyethylene closed cell foam: assures thermal insulation from surroundings

ASTM C 1427-07 compliant

Type I (tubular)

Grade I (insulation material for use on typical commercial system non-crosslinked)

Low-density polyethylene foam: closed cells foam, CFC and HCFC gas free

Water vapor permeability: ASTM E96-00 compliant

Working temperature: ASTM C 1427-07 compliant

Wall thickness: 1/2"


Surface burning characteristics: UL 94, top rated – UL 723, ASTM E84 (25/50) compliant, flame and Spread Index less than 25 and Smoke Development Index less than 50 as tested according to UL 723

R-Value: 4.0

COPPER

Pipes: Manufactured according to ASTM B280

Copper: No. C122200 DHP (phosphorous deoxidized, high residual phosphorous), 99.90%

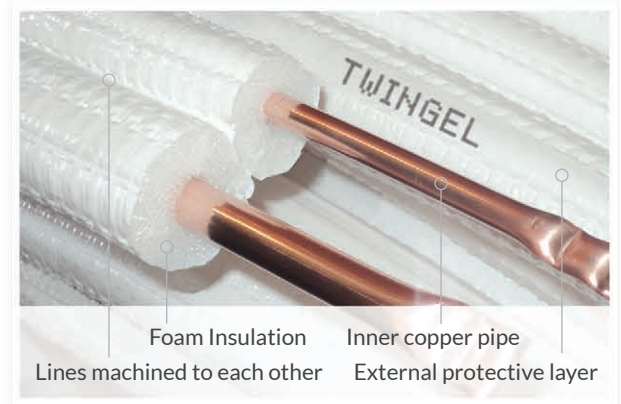

SPECIAL FEATURES

Outer Jacket: additional white polyethylene jacket cover protects foam insulation from tearing during installation process

Marking: insulation incrementally marked by every foot to ensure accurate initial unit charge

R410a approved: TwinGel can be used in applications where high-pressure gases are used as refrigeration source

UV resistant: TwinGel is UV resistant

Paintable: the insulation can be painted to match the surroundings

PDMus recommends product installation under plastic duct to protect it from severe weather conditions, accidental damages or theft.



100% MADE IN THE USA



TwinGel

PREINSULATED COPPER LINE SETS

TRY IT, LOVE IT.

PRODUCT TABLE

PDM US PART NUMBER (both lines insulated)	LL	SL	INSULATION	LINE SETS (per pallet)	LENGTH (of coils)
TG.LSIN143812050	1/4	3/8	1/2	12	50 FT
TG.LSIN141212050	1/4	1/2	1/2	12	50 FT
TG.LSIN145812050	1/4	5/8	1/2	8	50 FT
TG.LSIN381212050	3/8	1/2	1/2	12	50 FT
TG.LSIN385812050	3/8	5/8	1/2	8	50 FT
TG.LSIN383412050	3/8	3/4	1/2	8	50 FT
TG.LSIN387812050	3/8	7/8	1/2	6	50 FT