

DR-DB-DF Light Commercial Accessories 3-25 Tons



*Complete warranty details available from your local distributor or manufacturer's representative or at www.daikincomfort.com or www.daikinac.com



Our Perfect Package:

Harnessing energy-efficient performance, proven technology, and enhanced comfort for life.

Since becoming the first company in Japan to manufacture packaged air conditioning systems, in 1951, Daikin has supported comfortable indoor living based on the strengths and technologies that have led to the growth of the company becoming one of the world's largest manufacturers of HVAC products, systems and refrigerants.

Today, as a comprehensive global manufacturer of HVAC products and systems, the Daikin brand is committed to being recognized as a truly global and excellent company capable of continually creating new value for its customers. The company plans to pursue sustainable growth and foster business operations that consistently harmonize with the goals of improving indoor comfort.


The group philosophy of the company includes:

- » Creating new value continuously for customers
- » Developing world leading energy-saving technology
- » Being a flexible and dynamic organization
- » Allowing employees to be the driving force for the success of the company
- » Fostering an atmosphere of best practices, boldness, and innovation
- » Thinking and acting globally



Contents

4	Controls, Thermostats, and Sensors	4
5	Curbs and Restraints Clips	5
6	Economizers	6
7	Power Exhausts	7
8	Low Ambient	8
9	Electric Heat Kits	9
12	High Efficiency Filters	12
13	Crankcase Heater Kits	13
14	Hail Guard Kits	14
15	Dampers	15
16	Concentrics	16
17	Misc. Accessories	17
18	Factory and Field Installed Options	18

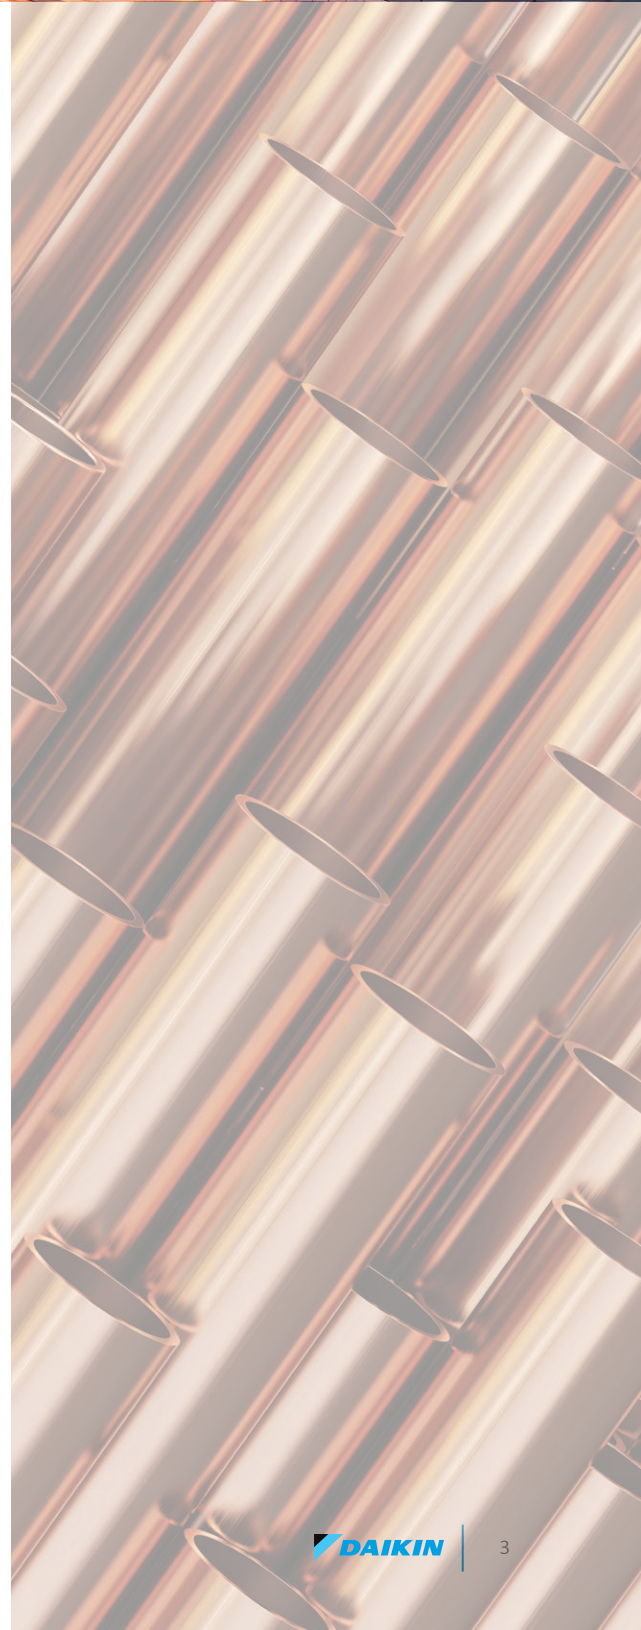

Controls, Thermostats and Sensors

Field Accessory part number	Description	Fits Model Size	Field-Installed	Factory-Installed	Operating Weight, lb
Thermostats, Sensors and Accessories					
DT4272C	Comm Touch Digital Stat w/ Wi-Fi 4h/2c	3-25 ton	√		1
DT4273C	Comm Touch Digital Stat w/Wi-Fi & Humidity Control 4h/2cc	3-25 ton	√		1
PSPAC-WS	Remote indoor sensor	3-25 ton	√		1
250803400	AppStat™ RTU 2H/2C Econ	3-25 ton	√		1
250803600	AppStat™ HPU 3H/2C Econ (Heat Pump)	3-25 ton	√		1
D4271C	4h/2c Commercial 7day Programmable Wi-Fi Capable thermostat	3-25 ton	√		1
D4272C	4h/2c Commercial 7day Programmable Wi-Fi Capable Hum/dehum thermostat	3-25 ton	√		1
C7232A1024	CO ₂ Sensor (Wall Mtd)	3-25 ton	√		1
C7232B1022	CO ₂ Sensor (Duct Mtd)	3-25 ton	√		1
D2270C	Mini Wi-Fi Thermostat	3-25 ton	√		1
TSTATD2152-2	Value Series 2h/1c 5+2 prgm (Heat Pump)	3-25 ton	√		1
TSTATD2100-2	Value Series 2h/1c No prgm (Heat Pump)	3-25 ton	√		1
TSTATD1100-2	Value Series 1h/1c No prgm	3-25 ton	√		1
TSTATD1152-2	Value Series 1h/1c 5+2 prgm	3-25 ton	√		1
PSPAC-AW	Add-A-Wire	3-25 ton	√		1
PSPAC-2W	2-Wire Kit	3-25 ton	√		1
PSPAC-OS	Wired Indoor / Outdoor Remote Sensor	3-25 ton	√		1
PSPAC-DS	Wired Duct Sensor	3-25 ton	√		1
PSPAC-WFMS	Wireless Wi-Fi Mini Sensor	3-25 ton	√		1
PSPAC-LR	Lock Ring for Premium Commercial Thermostats	3-25 ton	√		1
PSPAC-PWF	Wi-Fi Module	3-25 ton	√		1
PSPAC-WP	Wall Plate - Premium & Value Series	3-25 ton	√		1
PSPAC-WPT	Wall Plate Color Touch Screen	3-25 ton	√		1
PSPAC-WPM-S	Wall Plate Premium Mini - Small	3-25 ton	√		1
PSPAC-WPM-M	Wall Plate Premium Mini - Medium	3-25 ton	√		1
PSPAC-WPM-L	Wall Plate Premium Mini - Large	3-25 ton	√		1
C7400S1000	Differential Enthalpy Sensor	3-25 ton	√		1
DDC Controls and Sensors					
0130M00584	DDC Lonworks® Comm Card	3-25 ton	√		1
0130L00220	DDC Duct Mounted Co ₂ Sensor	3-25 ton	√		1
0130L00221	DDC Space Enthalpy Sensor Duct Mounted	3-25 ton	√		1
0130L00222	DDC Dry-Bulb Sensor 4" Duct Mounted	3-25 ton	√		1
0130L00223	DDC Od Enthalpy Sensor	3-25 ton	√		1
0130L00224	DDC Space Enthalpy Sensor Wall Mounted	3-25 ton	√		1
0130L00225	DDC Space Co ₂ Sensor Wall Mounted	3-25 ton	√		1
0130L00226	DDC Space Dry-Bulb Sensor Wall Mounted	3-25 ton	√		1
0130L00228	DDC Dry-Bulb Sensor 8" Duct Mounted	3-25 ton	√		1
0270L02252	DDC Low-Leak (Title 24) Downflow Economizer w/ Dry-bulb Sensor	15-25 ton	√		281
DLAKT23	DDC Low Ambient Kit 230v	15-20 ton	√		32
DLAKT24	DDC Low Ambient Kit 460v	15-20 ton	√		32
DLAKT25	DDC Low Ambient Kit 575v	15-20 ton	√		32
LAKT300DDC	DDC Low Ambient Kit	25 ton	√		32
3PMNDK03	Phase Monitor DDC Assy	15-25 ton	√		2

Curbs and Restraints Clips

Field Accessory part number	Description	Fits Model Size	Field-Installed	Factory-Installed	Operating Weight, lb
Curbs					
0221L00014	Roof Curb 14" Tall, Knocked Down	3-6 ton	√		80
0221L00019	Roof Curb 14" Tall Seismic with Hold Down Brackets, Knocked Down	3-6 ton	√		102
0221L00020	Roof Curb 14" Tall Wind-Rated Hurricane with Hold Down Brackets, Welded	3-6 ton	√		140
0221L00015	Roof Curb 24" Tall, Knocked Down	3-6 ton	√		109
0270L01153	Roof Curb 14" Tall, Knocked Down	7.5-12.5 ton	√		116
0221L00017	14" Tall Seismic Curb	7.5-12.5 ton	√		120
0221L00018	14" Tall Wind-Rated/Hurricane Curb	7.5-12.5 ton	√		160
0270L01154	Roof Curb 24" Tall, Knocked Down	7.5-12.5 ton	√		174
14CURB180300	14" Roof Curb	15-25 tons	√		285
18CURB180300	18" Roof Curb	15-25 tons	√		315
24CURB180300	24" Roof Curb	15-25 tons	√		360
HZCURB180300EDR	Horizontal Curb End Discharge Roofed In	15-25 tons	√		950
HZCURB180300NSR	Horizontal Curb Non-Service Side Discharge Roofed In	15-25 tons	√		950
HZCURB180300SSR	Horizontal Curb Service Side Discharge Roofed In	15-25 tons	√		950
HZCURB180300EDS	Horizontal Curb End Discharge Slab Mount	15-25 tons	√		850
HZCURB180300NSS	Horizontal Curb Non-Service Side Discharge Slab Mount	15-25 tons	√		850
HZCURB180300SSS	Horizontal Curb Service Side Discharge Slab Mount	15-25 tons	√		850
SHZRETPNL180300	Horizontal Return Panel	15-25 tons	√		50
Restraint Clips					
0270L01261	Hold Down Bracket Kit	3-6 ton	√		8
0270L01250	Hold Down Bracket Kit for Daikin Roof curb	3-6 ton	√		8
0270L01262	Hold Down Bracket Kit	7.5-12.5 ton	√		8
0270L01251	Hold Down Bracket Kit for Daikin Roof curb	7.5-12.5 ton	√		8
GHRC-180300	Hurricane Restraint Clips	15-25 tons	√		2

Economizers

Field Accessory part number	Description	Fits Model Size	Field-Installed	Factory-Installed	Operating Weight, lb
Downflow Low Leak Economizers					
0270L01156	Downflow Economizer Standard Low-Leak JADE® Dry-Bulb	3-6 ton	√	√	65
0270L01753	Downflow Economizer Standard Low-Leak JADE Ethalpy Sensor	3-6 ton	√	√	65
0270L01754	Downflow Economizer Standard Low-Leak JADE Enthalpy Sensor	7.5-12.5 ton	√	√	103
0270L01123	Downflow Economizer Standard Low-Leak JADE Dry-Bulb	7.5-12.5 ton	√	√	103
0270L02330	Low-Leak (Title 24) Downflow Economizer w/ Enthalpy Sensor	15-25 tons	√	√	281
0270L02333	Economizer Hood for 0270L02330	15-25 tons	√		-
Downflow Ultra Low Leak Economizers					
0270L01755	Downflow Economizer Ultra Low-Leak (Title 24) JADE Ethalpy Sensor	3-6 ton	√	√	65
0270L01158	Downflow Economizer Ultra Low-Leak (Title 24) JADE Dry-Bulb	3-6 ton	√	√	65
0270L01756	Downflow Economizer Ultra Low-Leak (Title 24) JADE Enthalpy Sensor	7.5-12.5 ton	√	√	103
0270L01125	Downflow Economizer Ultra Low-Leak (Title 24) JADE Dry-Bulb	7.5-12.5 ton	√	√	103
GHRC-180300	Hurricane Restraint Clips	15-25 tons	√		2
Horizontal Low Leak Economizers					
SHZECNJ180300B	Low-Leak (Title 24) Internal Horizontal Economizer w/ Enthalpy Sensor	15-25 tons	√		416
Horizontal Ultra Low Leak Economizers					
0270L01163	Horizontal Economizer Ultra Low-Leak (Title 24) JADE Dry-Bulb, 39" cabinet	3-5 ton	√		88
0270L01759	Horizontal Economizer Ultra Low-Leak (Title 24) JADE Enthalpy Sensor, 39" cabinet	3-5 ton	√		88
0270L01598	Horizontal Economizer Ultra Low-Leak (Title 24) JADE Dry-Bulb, 43" cabinet	6 ton	√		88
0270L01757	Horizontal Economizer Ultra Low-Leak (Title 24) JADE Enthalpy Sensor, 43" cabinet	6 ton	√		88
0270L01600	Horizontal Economizer Ultra Low-Leak (Title 24) JADE Dry-Bulb, 53" cabinet	6 ton	√		88
0270L01758	Horizontal Economizer Ultra Low-Leak (Title 24) JADE Enthalpy Sensor, 53" cabinet	6 ton	√		88
0270L01760	Horizontal Economizer Ultra Low-Leak (Title 24) JADE Enthalpy Sensor	7.5-12.5 ton	√		128
0270L01130	Horizontal Economizer Ultra Low-Leak (Title 24) JADE Dry-Bulb	7.5-12.5 ton	√		128
Downflow (DDC) Low Leak Economizers					
0270L01157	DDC Downflow Economizer Standard Low-Leak Dry-Bulb	3-6 ton	√	√	65
0270L01124	DDC Downflow Economizer Standard Low-Leak Dry-Bulb	7.5-12.5 Ton	√	√	103
Downflow (DDC) Ultra Low Leak Economizers					
0270L01159	DDC Downflow Economizer Ultra Low-Leak (Title 24) Dry-Bulb	3-6 ton	√	√	65
0270L01126	DDC Downflow Economizer Ultra Low-Leak (Title 24) Dry-Bulb	7.5-12.5 Ton	√	√	103
Horizontal (DDC) Ultra Low Leak Economizers					
0270L01164	DDC Horizontal Economizer Ultra Low-Leak (Title 24) Dry-Bulb, 39" cabinet	3 ton	√		88
0270L01599	DDC Horizontal Economizer Ultra Low-Leak (Title 24) Dry-Bulb, 43" cabinet	4-5 ton	√		88
0270L01601	DDC Horizontal Economizer Ultra Low-Leak (Title 24) Dry-Bulb, 53" cabinet	6 ton	√		88
0270L01131	DDC Horizontal Economizer Ultra Low-Leak (Title 24) Dry-Bulb Sensor	7.5-12.5 Ton	√		128

Power Exhausts

Field Accessory part number	Description	Fits Model Size	Field-Installed	Factory-Installed	Operating Weight, lb
Power Exhausts 230 Volt					
0270L01167	Power Exhaust Prop Downflow Economizer, 230 V	3-6 ton	√		57
0270L01170	Power Exhaust Prop Horizontal Economizer, 230 V	3-6 ton	√		47
0270L01134	Power Exhaust Prop Downflow Economizer 208/230 V	7.5-12.5 ton	√		94
0270L01137	Power Exhaust Prop Horizontal Economizer 208/230 V	7.5-12.5 ton	√		76
SHPE1803002	Horizontal Power Exhaust 208/230v	15-25 tons	√		200
SPE1803002	Downflow Power Exhaust (208/230v)	15-25 tons	√		98
Power Exhausts 460 Volt					
0270L01171	Power Exhaust Prop Horizontal Economizer, 460 V	3-6 ton	√		57
0270L01168	Power Exhaust Prop Downflow Economizer, 460 V	3-6 ton	√		47
0270L01135	Power Exhaust Prop Downflow Economizer 460 V	7.5-12.5 ton	√		94
0270L01138	Power Exhaust Prop Horizontal Economizer 460 V	7.5-12.5 ton	√		76
SHPE1803004	Horizontal Power Exhaust 460v	15-25 tons	√		200
SPE1803004	Downflow Power Exhaust (460v)	15-25 tons	√		98
Power Exhausts 575 Volt					
SHPE1803007	Horizontal Power Exhaust 575v	15-25 tons	√		200
SPE1803007	Downflow Power Exhaust (575v)	15-25 tons	√		98

Base Efficiency	LACKSM001	LACKSM002	LACKSM003	LACKSM004	LACKSM005	LACKSM006	LACKMD001	LACKMD002	LACKMD003	LACKMD004	LACKMD005	LACKMD006	LACKMD007	High Efficiency
DBC/DFC036	B/H/D													DRC036
DBC/DFC048	B/H/D													DRC048
DBC/DFC060	B	H	D											DRC060
DBC/DFC072	B/H/D													DRC072
DBC/DFC090							B	H				D		DRC090
DBC/DFC102							B	H				D		DRC102
DBC/DFC120							B	H				D		DRC120
DBC/DFC150							B		H				D	DRC150
DBG/DFG036	B/H/D													DRG036
DBG/DFG048	B/H/D													DRG048
DBG/DFG060	B	H	D											DRG060
DBG/DFG072	B/H/D													DRG072
DBG/DFG090							B	H				D		DRG090
DBG/DFG102							B	H				D		DRG102
DBG/DFG120							B	H				D		DRG120
DBG/DFG150							B		H				D	DRG150
DBH036				B/H/D										DRH036
DBH048				B	H	D								DRH048
DBH060				B	H	D								DRH060
				H/D										DRH072
DBH090											B			
DBH102											B			
DBH120											B			
DBH150										B				

B - Base Efficiency

H - High Efficiency without DDC

D - High Efficiency with DDC

Low Ambient Kit					
LAKT23	Low-Ambient Kit, 208-230V - non DDC	15-20 tons	√	√	32
LAKT24	Low-Ambient Kit, 460V - non DDC	15-20 tons	√	√	32
LAKT25	Low-Ambient Kit, 575V - non DDC	15-20 tons	√	√	32
LAKT05	Low-Ambient Kit, (all votages) - non DDC	25 tons	√	√	2

Electrical Heat Kit

Field Accessory part number	Description	Fits Model Size	Field Installed	Factory Installed	Operating Weight, lb
208/230 Volt Single Phase					
EHXD-1S05	Electric Heater, Direct Drive, 208-230V, 1PH, 5kW	3-5 ton	√	√	
EHXD-1S10	Electric Heater, Direct Drive, 208-230V, 1PH, 10kW	3-5 ton	√	√	
EHXD-1S16	Electric Heater, Direct Drive, 208-230V, 1PH, 15kW	3 ton	√	√	
EHXD-1S15	Electric Heater, Direct Drive, 208-230V, 1PH, 15kW	4-5 ton	√	√	
EHXD-1S22	Electric Heater, Direct Drive, 208-230V, 1PH, 20kW	4-5 ton	√	√	
EHXD-1S06	Electric Heater, Direct Drive, 208-230V, 1PH, 5kW	5 ton	√		
EHXD-1S11	Electric Heater, Direct Drive, 208-230V, 1PH, 10kW	5 ton	√		
EHXD-1S17	Electric Heater, Direct Drive, 208-230V, 1PH, 15kW	5 ton	√		
EHXD-1S23	Electric Heater, Direct Drive, 208-230V, 1PH, 20kW	5 ton	√		
208/230 Volt Three Phase (Belt Drive)					
EHXB-3S05	Electric Heater, Belt Drive, 208-230V, 3PH, 5kW	3-6 ton	√	√	
EHXB-3S10	Electric Heater, Belt Drive, 208-230V, 3PH, 10kW	3-6 ton	√	√	
EHXB-3S15	Electric Heater, Belt Drive, 208-230V, 3PH, 15kW	3-6 ton	√	√	
EHXB-3S18	Electric Heater, Belt Drive, 208-230V, 3PH, 18kW	4-6 ton	√	√	
EHXB-3S20	Electric Heater, Belt Drive, 208-230V, 3PH, 20kW	4-6 ton	√	√	
EHXB-3S30	Electric Heater, Belt Drive, 208-230V, 3PH, 30kW	6 ton	√	√	
EHXB-3M15	Electric Heater, Belt Drive, 208-230V, 3PH, 15kW	7.5/8.5 ton	√	√	
EHXB-3M16	Electric Heater, Belt Drive, 208-230V, 3PH, 15kW	10/12.5 ton	√	√	
EHXB-3M30	Electric Heater, Belt Drive, 208-230V, 3PH, 30kW	7.5/8.5 ton	√	√	
EHXB-3M31	Electric Heater, Belt Drive, 208-230V, 3PH, 30kW	10/12.5 ton	√	√	
EHXB-3M45	Electric Heater, Belt Drive, 208-230V, 3PH, 45kW	7.5/8.5 ton	√	√	
EHXB-3M46	Electric Heater, Belt Drive, 208-230V, 3PH, 45kW	10/12.5 ton	√	√	
EHK3-31	30kw 208-230v 3ph Electric Heat Kit	15-25 tons	√	√	21
EHK3-46	40kw 208-230v 3ph Electric Heat Kit	15-25 tons	√	√	21
EHK3-60	60kw 208-230v 3ph Electric Heat Kit	15-25 tons	√	√	21
EHK3-75	75kw 208-230v 3ph Electric Heat Kit	20 - 25 tons	√	√	21
208/230 Volt Three Phase (Direct Drive)					
EHXD-3S06	Electric Heater, Direct Drive, 208-230V, 3PH, 5kW	5 ton	√		
EHXD-3S11	Electric Heater, Direct Drive, 208-230V, 3PH, 10kW	5 ton	√		
EHXD-3S17	Electric Heater, Direct Drive, 208-230V, 3PH, 15kW	5 ton	√		
EHXD-3S23	Electric Heater, Direct Drive, 208-230V, 3PH, 20kW	5 ton	√		
EHXD-3S05	Electric Heater, Direct Drive, 208-230V, 3PH, 5kW	3-5 ton	√	√	
EHXD-3S10	Electric Heater, Direct Drive, 208-230V, 3PH, 10kW	3-5 ton	√	√	
EHXD-3S16	Electric Heater, Direct Drive, 208-230V, 3PH, 15kW	3 ton	√	√	
EHXD-3S15	Electric Heater, Direct Drive, 208-230V, 3PH, 15kW	4-5 ton	√	√	
EHXD-3S22	Electric Heater, Direct Drive, 208-230V, 3PH, 20kW	4-5 ton	√	√	
EHXD-3S20	Electric Heat Kit, 20 KW - 240V - 3PH	5-6 ton	√		
EHXD-3S21	Electric Heat Kit, 20 KW - 240V - 3PH	4&6 ton	√		
EHXD-3S30	Electric Heat Kit, 30 KW - 240V - 3PH	6 ton	√		
EHXD-3S31	Electric Heat Kit, 30 KW - 240V - 3PH	6 ton	√		
EHXD-3M10	Electric Heat Kit, 10 KW - 240V - 3PH	7.5-12.5 Ton	√		
EHXD-3M15	Electric Heat Kit, 15 KW - 240V - 3PH	7.5-12.5 Ton	√		

Make sure to pair correct heater kit with correct unit.

Electrical Heat Kit

Field Accessory part number	Description	Fits Model Size	Field Installed	Factory Installed	Operating Weight, lb
EHXD-3M20	Electric Heat Kit , 20 KW - 240V - 3PH	7.5-12.5 Ton	√		
EHXD-3M30	Electric Heat Kit , 30 KW - 240V - 3PH	7.5-12.5 Ton	√		
EHXD-3M45	Electric Heat Kit , 45 KW - 240V - 3PH	7.5-12.5 Ton	√		
EHXD-3M60	Electric Heat Kit , 60 KW - 240V - 3PH	10-12.5 Ton	√		
460 Volt Three Phase (Belt Drive)					
EHXB-4S05	Electric Heater, Belt Drive, 460V, 3PH, 5kW	3-6 ton	√	√	
EHXB-4S10	Electric Heater, Belt Drive, 460V, 3PH, 10kW	3-6 ton	√	√	
EHXB-4S15	Electric Heater, Belt Drive, 460V, 3PH, 15kW	3-6 ton	√	√	
EHXB-4S18	Electric Heater, Belt Drive, 460V, 3PH, 18kW	4-6 ton	√	√	
EHXB-4S20	Electric Heater, Belt Drive, 460V, 3PH, 20kW	4-6 ton	√	√	
EHXB-4S30	Electric Heater, Belt Drive, 460V, 3PH, 30kW	6 ton	√	√	
EHXB-4M15	Electric Heater, Belt Drive, 460V, 3PH, 15kW	7.5/8.5 ton	√	√	
EHXB-4M16	Electric Heater, Belt Drive, 460V, 3PH, 15kW	10/12.5 ton	√	√	
EHXB-4M30	Electric Heater, Belt Drive, 460V, 3PH, 30kW	7.5/8.5 ton	√	√	
EHXB-4M31	Electric Heater, Belt Drive, 460V, 3PH, 30kW	10/12.5 ton	√	√	
EHXB-4M45	Electric Heater, Belt Drive, 460V, 3PH, 45kW	7.5/8.5 ton	√	√	
EHXB-4M46	Electric Heater, Belt Drive, 460V, 3PH, 45kW	10/12.5 ton	√	√	
EHK4-31	30kw 460v 3ph Electric Heat Kit	15-25 tons	√	√	21
EHK4-46	40kw 460v 3ph Electric Heat Kit	15-25 tons	√	√	21
EHK4-60	60kw 460v 3ph Electric Heat Kit	15-25 tons	√	√	21
EHK4-75	75kw 460v 3ph Electric Heat Kit	20 - 25 tons	√	√	21
460 Volt Three Phase (Direct Drive)					
EHXD-4S06	Electric Heater, Direct Drive, 460V, 3PH, 5kW	5 ton	√		
EHXD-4S11	Electric Heater, Direct Drive, 460V, 3PH, 10kW	5 ton	√		
EHXD-4S17	Electric Heater, Direct Drive, 460V, 3PH, 15kW	5 ton	√		
EHXD-4S23	Electric Heater, Direct Drive, 460V, 3PH, 20kW	5 ton	√		
EHXD-4S05	Electric Heat Kit, 5 KW - 480V - 3PH	3-6 ton	√		
EHXD-4S10	Electric Heat Kit, 10 KW - 480V - 3PH	3-6 ton	√		
EHXD-4S15	Electric Heat Kit, 15 KW - 480V - 3PH	3-6 ton	√		
EHXD-4S16	Electric Heat Kit, 15 KW - 480V - 3PH	3 ton	√		
EHXD-4S20	Electric Heat Kit, 20 KW - 480V - 3PH	5-6 ton	√		
EHXD-4S21	Electric Heat Kit, 20 KW - 480V - 3PH	4&6 ton	√		
EHXD-4S22	Electric Heat Kit, 20 KW - 480V - 3PH	4-5 ton	√		
EHXD-4S30	Electric Heat Kit, 30 KW - 480V - 3PH	6 ton	√		
EHXD-4S31	Electric Heat Kit, 30 KW - 480V - 3PH	6 ton	√		
EHXD-4M10	Electric Heat Kit , 10 KW - 480V - 3PH	7.5-12.5 Ton	√		
EHXD-4M15	Electric Heat Kit , 15 KW - 480V - 3PH	7.5-12.5 Ton	√		
EHXD-4M20	Electric Heat Kit , 20 KW - 480V - 3PH	7.5-12.5 Ton	√		
EHXD-4M30	Electric Heat Kit , 30 KW - 480V - 3PH	7.5-12.5 Ton	√		
EHXD-4M45	Electric Heat Kit , 45 KW - 480V - 3PH	7.5-12.5 Ton	√		
EHXD-4M60	Electric Heat Kit , 60 KW - 480V - 3PH	10-12.5 Ton	√		
575 Volt Three Phase (Belt Drive)					
EHXB-7S05	Electric Heater, Belt Drive, 575V, 3PH, 5kW	3-6 ton	√	√	
EHXB-7S10	Electric Heater, Belt Drive, 575V, 3PH, 10kW	3-6 ton	√	√	
EHXB-7S15	Electric Heater, Belt Drive, 575V, 3PH, 15kW	3-6 ton	√	√	

Make sure to pair correct heater kit with correct unit.

Electrical Heat Kit

Field Accessory part number	Description	Fits Model Size	Field Installed	Factory Installed	Operating Weight, lb
EHXB-7S18	Electric Heater, Belt Drive, 575V, 3PH, 18kW	4-6 ton	√	√	
EHXB-7S20	Electric Heater, Belt Drive, 575V, 3PH, 20kW	4-6 ton	√	√	
EHXB-7S30	Electric Heater, Belt Drive, 575V, 3PH, 30kW	6 ton	√	√	
EHXB-7M15	Electric Heater, Belt Drive, 575V, 3PH, 15kW	7.5/8.5 ton	√	√	
EHXB-7M16	Electric Heater, Belt Drive, 575V, 3PH, 15kW	10/12.5 ton	√	√	
EHXB-7M30	Electric Heater, Belt Drive, 575V, 3PH, 30kW	7.5/8.5 ton	√	√	
EHXB-7M31	Electric Heater, Belt Drive, 575V, 3PH, 30kW	10/12.5 ton	√	√	
EHXB-7M45	Electric Heater, Belt Drive, 575V, 3PH, 45kW	7.5/8.5 ton	√	√	
EHXB-7M46	Electric Heater, Belt Drive, 575V, 3PH, 45kW	10/12.5 ton	√	√	
EHK7-31	30kw 575v 3ph Electric Heat Kit	15-25 tons	√	√	21
EHK7-46	40kw 575v 3ph Electric Heat Kit	15-25 tons	√	√	21
EHK7-60	60kw 575v 3ph Electric Heat Kit	15-25 tons	√	√	21
EHK7-75	75kw 575v 3ph Electric Heat Kit	20 - 25 tons	√	√	21
575 Volt Three Phase (Direct Drive)					
EHXD-7S06	Electric Heater, Direct Drive, 575V, 3PH, 5kW	5 ton	√		
EHXD-7S11	Electric Heater, Direct Drive, 575V, 3PH, 10kW	5 ton	√		
EHXD-7S17	Electric Heater, Direct Drive, 575V, 3PH, 15kW	5 ton	√		
EHXD-7S23	Electric Heater, Direct Drive, 575V, 3PH, 20kW	5 ton	√		
EHXD-7S05	Electric Heat Kit, 5 KW - 600V - 3PH	3-6 ton	√		
EHXD-7S10	Electric Heat Kit, 10 KW - 600V - 3PH	3-6 ton	√		
EHXD-7S15	Electric Heat Kit, 15 KW - 600V - 3PH	3-6 ton	√		
EHXD-7S16	Electric Heat Kit, 15 KW - 600V - 3PH	3 ton	√		
EHXD-7S20	Electric Heat Kit, 20 KW - 600V - 3PH	5-6 ton	√		
EHXD-7S21	Electric Heat Kit, 20 KW - 600V - 3PH	4&6 ton	√		
EHXD-7S22	Electric Heat Kit, 20 KW - 600V - 3PH	4-5 ton	√		
EHXD-7S30	Electric Heat Kit, 30 KW - 600V - 3PH	6 ton	√		
EHXD-7S31	Electric Heat Kit, 30 KW - 600V - 3PH	6 ton	√		
EHXD-7M10	Electric Heat Kit , 10 KW - 600V - 3PH	7.5-12.5 Ton	√		
EHXD-7M15	Electric Heat Kit , 15 KW - 600V - 3PH	7.5-12.5 Ton	√		
EHXD-7M20	Electric Heat Kit , 20 KW - 600V - 3PH	7.5-12.5 Ton	√		
EHXD-7M30	Electric Heat Kit , 30 KW - 600V - 3PH	7.5-12.5 Ton	√		
EHXD-7M45	Electric Heat Kit , 45 KW - 600V - 3PH	7.5-12.5 Ton	√		
EHXD-7M60	Electric Heat Kit , 60 KW - 600V - 3PH	10-12.5 Ton	√		

Make sure to pair correct heater kit with correct unit.

High Efficiency Filters

Filter Sizing Table		
Model	Tonnage	Filter Combination
DBC/G	3-5	(2) D
DBC/G	6	(2) A and (2) C
DBC/G	7.5-12.5	(4) D
DBH	3-4	(4) A
DBH	5	(2) A and (2) C
DBH	7.5	(4) B
DBH	8.5-10	(2) D and (2) E
DBH	12.5	(4) D
DFC/G	5	(2) D
DRC/G	3-4	(4) D
DRC/G	5	(2) A and (2) C
DRC/G	6	(4) C
DRC/G	7.5	(4) B
DRC/G	8.5-10	(2) D and (2) E
DRC/G	12.5	(4) E
DRH	3-4	(4) A
DRH	5	(2) A and (2) C
DRH	6	(4) C

Filter Identifier	Field Accessory part number	Description	Field Installed	Factory Installed	Operating Weight, lb
High Efficiency Filters MERV 8					
A	0160L00268	High Efficiency MERV 8 Air Filter Kit - 14x20x2	√		4
B	0160L00269	High Efficiency MERV 8 Air Filter - 16x25x2	√		4
C	0160L00270	High Efficiency MERV 8 Air Filter Kit - 20x20x2	√		4
D	0160L00271	High Efficiency MERV 8 Air Filter Kit - 20x25x2	√		4
E	0160L00274	High Efficiency MERV 8 Air Filter - 25x25x2	√		4
High Efficiency Filters MERV 13					
C	0160L00201	High Efficiency MERV 13 Air Filter Kit - 20x20x2	√		4
D	0160L00202	High Efficiency MERV 13 Air Filter Kit - 20x25x2	√		4
A	0160L00204	High Efficiency MERV 13 Air Filter Kit - 14x20x2	√		4
B	0160L00275	High Efficiency MERV 13 Air Filter - 16x25x2	√		4
E	0160L00277	High Efficiency MERV 13 Air Filter - 25x25x2	√		4

Crankcase Heater Kits

Field Accessory part number	Description	Fits Model Size	Field Installed	Factory Installed	Operating Weight, lb
Crankcase Heater Kits					
HECH36230	Crankcase heater Kit 208/230 V	3 ton	√		1
HECH4860230	Crankcase heater Kit 208/230 V	4-6 ton	√		1
HECH36460	Crankcase heater Kit 460 V	3 ton	√		1
HECH4860460	Crankcase heater Kit 460 V	4-6 ton	√		1
HECH36575	Crankcase heater Kit 575 V	3 ton	√		1
HECH4860575	Crankcase heater Kit 575 V	4-6 ton	√		1
HECH90150230	Crankcase Heater Kit 230V	7.5-12.5 ton	√	√	2
HECH90150460	Crankcase Heater Kit 460V	7.5-12.5 ton	√	√	2
HECH90150575	Crankcase Heater Kit 575V	7.5-12.5 ton	√	√	2

Hail Guard Kits

Hail Guard Sizing Table		
Model	Tonnage	Hail Guard Identifier
DBC/G	3-5	A
DBC/G	6	B
DBC/G	7.5-12.5	D
DBH	3-4	A
DBH	5	B
DBH	7.5-10	D
DBH	12.5	E
DFC/G	5	A
DRC/G	3	A
DRC/G	4-5	B
DRC/G	6	C
DRC/G	7.5-10	D
DRC/G	12.5	E
DRH	3-5	B
DRH	6	C

Hail Guard Identifier	Field Accessory part number	Description	Field Installed	Factory Installed	Operating Weight, lb
Hail Guard Kits					
A	HAILGD036HE	Condenser Coil Hail Guards, 39" cabinet	√	√	
B	HAILGD048060HE	Condenser Coil Hail Guards, 43" cabinet	√	√	
C	HAILGD072HE	Condenser Coil Hail Guards, 53" cabinet	√	√	
D	HAILGD090120HE	Condenser Coil Hail Guards	√	√	
E	HAILGD150HE	Condenser Coil Hail Guards	√	√	

Dampers

Field Accessory part number	Description	Fits Model Size	Field Installed	Factory Installed	Operating Weight, lb
Dampers					
0270L01165	2 Position Motorized Damper	3-6 ton	√		40
0270L01166	Manual Outdoor Air Damper	3-6 ton	√		24
0270L01132	2 Position Motorized Damper	7.5-12.5 ton	√		57
0270L01133	Manual Outdoor Air Damper	7.5-12.5 ton	√		41
S25FD180300	25% Manual Fresh Air Damper	15-25 tons	√		34
S25MFD180300	25% Motorized Fresh Air Damper	15-25 tons	√		42
S50MFD180300	50% Motorized Fresh Air Damper	15-25 tons	√		42
SHZE25FD180300	Horizontal Fresh Air Damper 25%	15-25 tons	√		75

Concentrics

Field Accessory part number	Description	Fits Model Size	Field Installed	Factory Installed	Operating Weight, lb
Concentrics					
0270L01602	Concentric Diffuser 24 x 48 with 16" dia collars	3-6 ton	√		32
0270L01335	Concentric Duct Adaptor Kit for 16" Dia. Duct	3-6 ton	√		28
0270L01603	Concentric Diffuser 24 x 48 with 18" dia collars	3-6 ton	√		35
0270L01338	Concentric Duct Adaptor Kit for 18" Dia. Duct	3-6 ton	√		28
0221L00011	Concentric Diffuser 30 x 48 with 20" dia collars	7.5/8.5 ton	√		
0270L01336	Concentric adaptor for curb - 20" collar	7.5/8.5 ton	√		40
0221L00012	Concentric Diffuser 36 x 48 with 18 x 28 duct size	10 ton	√		
0270L01768	Concentric adaptor for curb - 18 x 28 duct size	10 ton	√		56
0221L00013	Concentric Diffuser 42 x 48 with 18 x 32 duct size	12.5 ton	√		
0270L01769	Concentric adaptor for curb - 18 x 32 duct size	12.5 ton	√		54
CDK180	Concentric Duct Kit	15 tons	√		158
CDK240	Concentric Duct Kit	20 tons	√		197
CDK300	Concentric Duct Kit Flush Mount Diffuser	25 tons	√		244
CDK300-530	Concentric Duct Kit Step-Down Diffuser	25 tons	√		244

Misc. Accessories

Field Accessory part number	Description	Fits Model Size	Field Installed	Factory Installed	Operating Weight, lb
Through the Base Kits					
TTBCKHE01	Through the Base Gas/Electrical	3-6 ton	√	√	1
TTBCKHE02	Through the Base Connections	7.5-12.5 ton	√	√	1
3 Phase Monitors					
3PMKP1	Phase Monitor Kit	3-6 ton	√	√	2
3PMKP2	Phase Monitor Kit	7.5-12.5 ton	√	√	2
3PMKP3	Phase Monitor Kit	3-6 ton	√	√	2
3PMNDK01	Phase Monitor - Non DDC	15-25 tons	√	√	2
Condensate Overflow Switch					
DPOFSK01	Overflow Switch Kit	3-6 ton	√		
DPOFSK02	Drain Pan Overflow Switch Kit	7.5-12.5 Ton	√		
Freeze Stat					
FSKT02A	Freeze Stat Kit2	25 tons	√		1
Duct Mounted Smoke Detectors					
D4120	Smoke Detector- Duct Mounted	3-25 ton	√		1
D4120W	Smoke Detector- Watertight	3-25 ton	√		1
High Altitude Kit					
HAKT036150	High Altitude Kit (Gas only)	3-6 ton	√		1
HAKT036150	High Altitude Kit (Gas only)	7.5-12.5 ton	√		
HA036300	High-Altitude Kit	15-25 tons	√		1
LP Conversion Kit					
LPHE-036072	Propane Conversion Kit (Gas only)	3-6 ton	√		1
LPHE-090150	Propane Conversion Kit (Gas only)	7.5-12.5 ton	√		1
LPKT180300A	LP Conversion Kit	15-25 tons	√		1
Flue Extension Kit					
HEFLUE036	Flue Extension, 39" cabinet (Gas only)	3-5 ton	√		6
HEFLUE048060	Flue Extension, 43" cabinet (Gas only)	6 ton	√		6
HEFLUE090120	Flue Extension Kit	7.5-12.5 ton	√		
220-GX-03	Flue Extension Kit	15-25 tons	√		5
Burglar Bars					
0270L01232	Burglar bars Inserts	3-6 ton	√		18
0270L01233	Burglar bars Inserts	7.5-12.5 ton	√		28
DNBBS180300	Burglar Bar Sleeves with Supply and Return	15-25 tons	√		60
Barometric Relief					
SBRD180300	Barometric Relief	15-25 tons	√		30

Factory Installed Options

- » **Non-Powered Convenience Outlet:** A 120V, 15A, GFCI outlet can be installed in the unit making it easier for technicians to service other units once an electrician runs power to the outlet. Outlet shall be factory-installed and internally mounted with easily accessible 120-v female receptacle. Transformer not included for this option. Outlet shall include a field-installed "While-in-Use" cover.
- » **Powered Convenience Outlet:** A 115V, 15A, GFCI outlet can be powered with a step-transformer built into the unit. When a factory-installed powered convenience outlet is installed in the equipment, the unit MCA (Min. Circuit Ampacity) will increase by 9.6A for 208V units; increase by 8.7A for 230V; increase by 4.35A for 460V units; and by 3.5A for 575V units. The MOP (Max. Overcurrent Protection) device must be sized accordingly. Outlet shall be powered from main line power to the rooftop unit. Outlet shall include a field installed "While-in-Use" cover
- » **Stainless-Steel Heat Exchanger (Gas/Electric units only):** A tubular heat exchanger made of 409-type stainless steel can be installed in the unit.
- » **Return Air and/or Supply Air Smoke Detectors:** Return air and/or supply air smoke detectors can be installed in the unit. To safely identify the presence of smoke inside the air conditioning system and shutdown the blower to prevent the smoke to disperse into different zones.
- » **Disconnect Switch (non-fused):** A disconnect switch can be installed in the unit with factory wiring complete from the switch to the unit. Please note that for air conditioner and heat pump units, the appropriate electric heat kit must be ordered along with the disconnect switch (non-fused) to be factory-installed. For models with a powered convenience outlet option and a disconnect switch (non-fused) option, the power to the powered convenience outlet will be shut off when the disconnect switch (non-fused) is in the off position. National Electric Code (NEC) and UL approved non-fused switch shall provide unit power shutoff. The switch shall be accessible from outside of the unit and provide local shutdown and lockout capability.
- » **Hinged Access Panels:** Allows access to unit's major components. Combined with latches for easy access to control box, compressor, filters and blower motor.
- » **Through-the-base electrical connection:** Allows an easy and fast field installation through the unit base pan.
- » **Through-the-base gas utility connection:** Allows an easy and fast field installation through the unit base pan.
- » **Electromechanical Controls:** Basic controls that include terminal block for unit connectivity to T-Stat.
- » **iLINQ DDC Controls:** Equipped with built-in BACnet™ IP and MS/TP interface or it can be used with an optional LonWorks® card that is available to integrate the Daikin RTU with building automation systems (BMS).

Field Installed Options

- » **Manual Fresh Air Damper:** Manual damper package shall consist of damper, air inlet screen, and rain hood which can be preset to admit up to 25% outdoor air for year round ventilation.
- » **Motorized Fresh Air Damper:** A two-position damper with rain hood and screen provides up to 50% outside air when the indoor fan starts and closes when the indoor fan shuts down. Consist of actuator, damper, air inlet screen, and rain hood. Damper shall close upon indoor (evaporator) fan shutoff and/or loss of power. The damper actuator shall plug into the rooftop unit's wiring harness plug. No hard wiring shall be required.
- » **Power Exhaust:** Power exhaust shall be used in conjunction with an integrated economizer. This accessory exhausts return air and may be used in either downflow or horizontal (duct-mounted) applications. Horizontal power exhaust shall be mounted in return ductwork. Power exhaust shall be controlled by economizer controller operation. Exhaust fans shall be energized when dampers open past the 0-100% adjustable setpoint on the economizer control.
- » **Horizontal Economizer:** Fully modulating between 0 and 100%, contain seals that meet ASHRAE 90.1 requirements. Includes motor and dampers, minimum position settings, preset linkage, wiring harness with plug, mixed air temperature sensor, and enthalpy control. An optional duct-mounted barometric relief damper is available. An optional return enthalpy sensor is available to provide comparative or differential enthalpy control. Damper blades shall be galvanized steel with composite gears. Plastic or composite blades on intake or return shall not be acceptable. Standard leak rate shall be equipped with dampers not to exceed 2% leakage at 1 in. wg pressure differential. Ultra Low Leak design meets California Title 24 section 140.4 and ASHRAE 90.1 requirements for 4 cfm per sq.ft. on the outside air dampers and 10 cfm per sq. ft. on the return dampers. Shall be designed to close damper(s) during loss-of-power situations with spring return built into motor. Economizer controller shall accept a 2-10 Vdc CO₂ sensor input for IAQ/DCV control. In this mode, dampers shall modulate the outdoor air damper to provide ventilation based on the sensor input.
- » Economizer controller shall be Honeywell® JADE® W7220 that provides:
 - 2-line LCD interface screen for setup, configuration and troubleshooting.
 - On-board Fault Detection and Diagnostics (FDD) that senses and alerts when the economizer is not operating properly, per California Title 24.
 - Sensor failure loss of communication identification
 - Automatic sensor detection
 - Capabilities for use with multiple-speed indoor fan systems
 - Utilize digital sensors: Dry bulb and Enthalpy
 - Economizer controller shall provide indications when in free cooling mode, in the DCV mode, or the exhaust fan contact is closed.

- » **High Altitude Kit (Gas/Electric units):** Can be used in gas/electric units operating at higher altitudes.
- » **Barometric relief (only when economizer is installed):** Allows air pressure relief inside the building to maintain a constant interior pressure.
- » **LP Conversion Kit (Gas/Electric units):** Allows gas/electric package units to use propane fuel.
- » **Roof curbs:** Full perimeter roof curb with exhaust capability providing separate air streams for energy recovery from the exhaust air without supply air contamination. Two different heights 14" and 24", allows proper installation and structure stability. Formed galvanized steel with wood nailer strip and shall be capable of supporting entire unit weight.
- » **Concentric duct kits:** Designed to provide a single-point air distribution system with the added benefit of having directional air control.
- » **Restraint mounting clips:** Allows for installation reinforcement for Hurricane and/or seismic events.
- » **CO₂ sensor:** Sensor designed to alarm the system when the CO₂ levels are outside safe parameters.
- » **Flue extension (Gas/Electric units):** Allows the exhaust gas produced by the heat exchanger to be redirected.
- » **Burglar Bar Sleeves:** Designed to prevent the access thru the return or supply ducting inside the unit.
- » **Downflow square to round adapter 18":** Installed into a recessed portion of the roof curb, the concentric duct adaptor changes the orientation of the ductwork from square to round for applications utilizing that type of ducting system.
- » **Side discharge concentric diffuser system:** The Concentric diffuser system is an all in one supply and return duct free arrangement for RTU systems. This system comes with two separate duct connections, one for a supply and another for a return.
- » **Remote indoor sensor:** Remote sensor to monitor the temperature on zones away from the main thermostat.
- » **Drain pan overflow switch:** Allows the controls to detect and send an alarm when there is an overflow on the drain pan.
- » **Freeze stat:** Temperature sensing device that monitors the heat exchange to prevent the coil from freezing.

Factory and Field Installed Options

- » **Downflow Economizer:** Fully modulating between 0 and 100%, contain seals that meet ASHRAE 90.1 requirements. Includes motor and dampers, minimum position settings, a preset linkage, a wiring harness with plug, a mixed air temperature sensor, enthalpy control, and a barometric relief damper. An optional return enthalpy sensor is available to provide comparative or differential enthalpy control. Damper blades shall be galvanized steel with composite gears. Plastic or composite blades on intake or return shall not be acceptable. Standard leak rate shall be equipped with dampers not to exceed 2% leakage at 1 in. wg pressure differential. Ultra Low Leak design meets California Title 24 section 140.4 and ASHRAE 90.1 requirements for 4 cfm per sq.ft. on the outside air dampers and 10 cfm per sq. ft. on the return dampers. Shall be designed to close damper(s) during loss-of-power situations with spring return built into motor. Economizer controller shall accept a 2-10 Vdc CO₂ sensor input for IAQ/DCV control. In this mode, dampers shall modulate the outdoor air damper to provide ventilation based on the sensor input. Economizer controller shall be Honeywell® W7220 that provides:
 - » Economizer controller shall be *Honeywell* W7220 that provides:
 - 2-line LCD interface screen for setup, configuration and troubleshooting.
 - On-board Fault Detection and Diagnostics (FDD) that senses and alerts when the economizer is not operating properly, per California Title 24.
 - Sensor failure loss of communication identification
 - Automatic sensor detection
 - Capabilities for use with multiple-speed indoor fan systems
 - Utilize digital sensors: Dry bulb and Enthalpy
 - Economizer controller shall provide indications when in free cooling mode, in the DCV mode, or the exhaust fan contact is closed.
 - » **Low Ambient Control:** Allows cooling operation down to 35°F outdoor ambient temperature for 3-6 ton units.
 - » **Phase Monitor:** Phase monitor (3-Phase only) shall provide protection for motors and compressors against problems caused by phase loss, phase reversal and phase unbalance. Phase monitor is equipped with an LED that provides an ON or FAULT indicator.
 - » **Condenser Hail Guards:** Louvered metal guards help protect the condenser coil from hail and debris; available as a field-installed options on 3-12½ ton units.

