The Malco Group

ASPEN PUMPS



MINI WHITE 4.5

Mini-Split Condensate Pump Kit
Univolt 100-250VAC, 50/60Hz

Project Information:

Job Name:
Location:
Engineer:
Contractor:
Distributor:
Submitted to:
For: ☐ Reference ☐ Approval ☐ Construction
Submitted by:
Reference:

Submittal Information:

Approval:
Date:
Construction:
Contractor:
Distributor:
Unit #:
Drawing #:
Estimated Qty:

(Sec. I) Product Specifications:

Max. flow	5.25 US Gallons (20L/h) @ 0m head
Max. rec. head	33ft. / 10m
Min. dB(A) @ 1m	19dB(A)*
Power supply	100-250V, 50/60Hz, 0.16A, 5W
Rated	Continuous
Class	II
Max. unit output	26kW / 90,000BTU/h / 7.5 tons
Max. ambient temp	104°F (40°C)
IP Protection	IP24
Inlet o/d	5/8"-7/8" (16mm-23mm)
Outlet o/d	1/4" (Ø6mm)
Safety switch	High level safety wires N.C. contacts, 250 VAC, 3A max
Self priming	✓

(Sec. II) Ordering Information:

Product	DACA-CP4-ASP
Model	Mini White (4.5 Gen)
Carton Qty	Qty: 1
Carton Weight	1.54lbs.

(Sec. III) Carton Contents:

Mini White 4.5 Gen Pump
Hardwired 5 (1.5m) Power Cable
Fitting template (on the box)
Quick start guide


(Fig. I) Product Image:



(Fig. II) Typical Pump Locations:

Mounted under mini split equipment
– left or right handed

Mini White | 100-250VAC, 50Hz/60Hz US Gallons

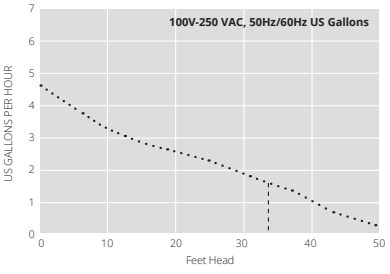

Pump Selector and Wiring Diagrams available at:

*Assuming solid wall construction with a 2kW unit.
Ensure ALL cleaning chemicals are flushed out of the reservoir after use.

(Aspen Pumps Group products are subject to continuous improvements; Aspen Pumps Group reserves the right to modify product design, specifications Pump Selector & Wiring Diagrams Available at & information in this data sheet without notice and without incurring any obligations) malcogrp.com