




Submittal Data Sheet

Replacement MERV 13 Filters
DACA-MQP-30-1B

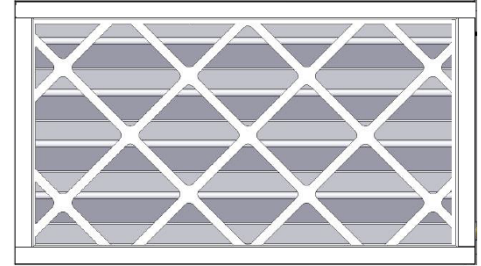

DESCRIPTION

Replacement MERV 13 pleated filters for use with the DACA-FXMQ30131K adaptor kit.

FEATURES

- Designed to meet the demands of the toughest applications, the AmAir 1300 4" pleated filter offers premium performance and construction.
- Its synthetic, electrostatically charged media has a high initial efficiency and is particularly effective in capturing finer particulate.
- The AmAir 1300 also has a heavy duty, expanded metal support grid to increase rigidity and help maintain proper pleat spacing. This maximizes efficiency, low resistance, and high dust-holding capacity with no racking or vibration of the pleats under normal airflow.

SPECIFICATIONS

Model No.:	DACA-MQP-30-1B		
Components Included:	Six (6) Replacement MERV 13 Filters		
Unit Compatibility:	FXMQ15PAVJU, FXMQ18PAVJU, FXMQ24PAVJU FXMQ15PBVJU, FXMQ18PBVJU, FXMQ24PBVJU FBQ18PVJU, FBQ24PVJU, FBQ30PVJU		
Unit Weight:	2.20 lbs (1 kgs) per two (2) required filters		
Dimensions (W x H x D):	19.00" x 11.38" x 3.75" (482.6 mm x 289.1 mm x 95.25 mm)		
Material / Finish:	Synthetic, electrostatically charged media		
Filter Rating:	MERV 13		
Filter Type:	Disposable		
	FXMQ15PAVJU	FXMQ18PAVJU	FXMQ24PAVJU
Initial / Final Pressure Loss:	0.050 inH ₂ O (12.4 Pa) / 0.390 inH ₂ O (97 Pa)	0.060 inH ₂ O (14.9 Pa) / 0.390 inH ₂ O (97 Pa)	0.070 inH ₂ O (17.4 Pa) / 0.390 inH ₂ O (97 Pa)
Airflow Rate:	560 CFM (15.7 m ³ /min)	636 CFM (17.8 m ³ /min)	688 CFM (19.3 m ³ /min)
	FBQ18PVJU	FBQ24PVJU	FBQ30PVJU
Initial / Final Pressure Loss:	0.060 inH ₂ O (14.9 Pa) / 0.390 inH ₂ O (97 Pa)	0.070 inH ₂ O (17.4 Pa) / 0.390 inH ₂ O (97 Pa)	0.100 inH ₂ O (24.9 Pa) / 0.390 inH ₂ O (97 Pa)
Airflow Rate:	635 CFM (17.8 m ³ /min)	688 CFM (19.3 m ³ /min)	882 CFM (19.3 m ³ /min)

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056
www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations).