



Submittal Data Sheet

DAPT-ONE-VMS for VRV, Mini-Split, and Multi-Split Units

Project Name:		Approval:	
Location:		Date:	
Engineer:		Construction:	
Submitted to:		Unit #:	
Submitted by:		Drawing #:	
Reference:			

MODEL COMPATIBILITY:

Ductless Mini- & Multi-Split Systems	Type	Compatible Family (Models starting with)
	R-32 12RC Indoor Units	CMXV
	R-32 S21 Indoor Units ¹	FTXC, FTXM ⁴
	R-32 P1/P2 Indoor Units ¹	FDMA
	R-410A S21 Indoor Units ¹	CDXS, CTXS ² , FDXS, FTX ² , FTXB ² , FTXF ² , FTXF ² FTXG [^] , FTX09_12N ² , FTX15_18_24N ³ , FTRX, FTXS, FVXS ³
	R-410A P1/2P Indoor Units ¹	CDMQ, FDMQ, FFQ

¹ Must purchase and install communication adaptor DAPT-ONE-VMS
² Must purchase S21 adapter KRP067A41E
³ Must purchase S21 adapter KRP980B2E
⁴ Must purchase S21 adapter KER087A41
[^] The Sarara drying function of the QUATERNITY units is not supported with Daikin ONE+ touch smart thermostat, but the dehumidification function Daikin ONE+of thecan be used with the QUATERNITY indoor units.

SkyAir and VRV Systems ⁵	Type	Compatible Family (Models starting with)
	R-32 VRV Indoor Units	FXAA, FXFA, FXSA, FXMA, FXTA, FXZA
	R410A VRV Indoor Units	FXAQ, FXDQ, FXFQ, FXLQ, FXMQ, FXNQ, FXSQ, FXZQ
	R-32 SkyAir Indoor Units	FAA, FBA, FCA, FTA
	R-410A SkyAir Indoor Units	FAQ, FBQ, FCQ, FHQ, FTQ

⁵ Must purchase and install communication adaptor DAPT-ONE-VMS



Submittal Data Sheet

DAPT-ONE-VMS for VRV, Mini-Split, and Multi-Split Units

Project Name:		Approval:	
Location:		Date:	
Engineer:		Construction:	
Submitted to:		Unit #:	
Submitted by:		Drawing #:	
Reference:			

SPECIFICATIONS:

Model		DAPT-ONE-VMS
Description		Daikin ONE Translation Adaptor
Maximum Connections		1 for S21 indoor units / 16 for P1P2 indoor units
Max Wiring Length	Power Wire	5.5 ft (included)
	Thermostat Wire	125 ft (Field-supplied, 18AWG, 4-core non-shielded stranded wire)
	S21 Communication Wire	6 ft (included)
	P1P2 Communication Wire	6 ft* for the wire between the Translation Adaptor and the indoor unit terminal block (Field-supplied, 18AWG, 2-core non-shielded stranded wire)
Power Supply		110-230 VAC 60Hz +/-5%
Dimensions		7.3"L x 2.7"W x 1.3"H
Weight		1 lb.
Storage Temperature		-22F – 122F
Operation Temperature		-120F – 140F
Humidity		Not applicable
Compliance		UL/CUL

PRODUCT IMAGE:

Translation Adaptor:




* P1P2 wire has a maximum wiring length of 1640 feet


Project Name: _____	Approval: _____
Location: _____	Date: _____
Engineer: _____	Construction: _____
Submitted to: _____	Unit #: _____
Submitted by: _____	Drawing #: _____
Reference: _____	

SYSTEM DIAGRAM:

- For S21 indoor units

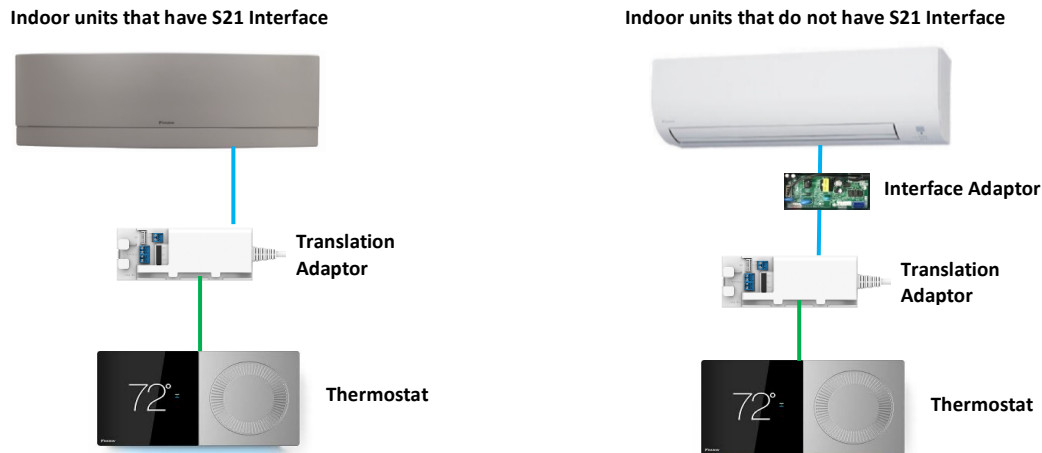

- For P1P2 indoor units

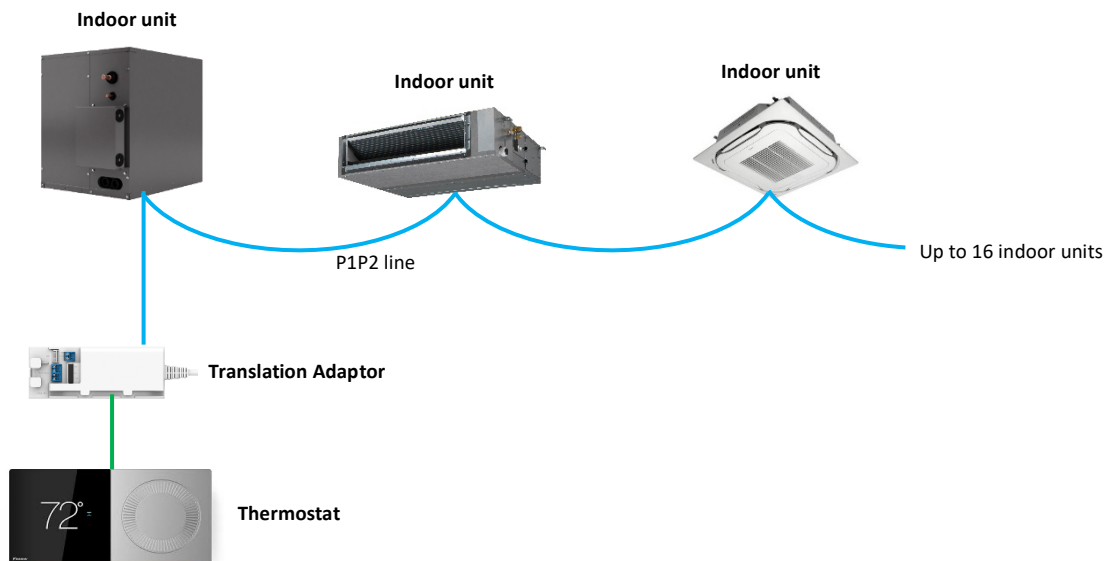

Project Name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____

Approval: _____

Date: _____


Construction: _____

Unit #: _____


Drawing #: _____

WIRING DIAGRAM:

- For S21 indoor units

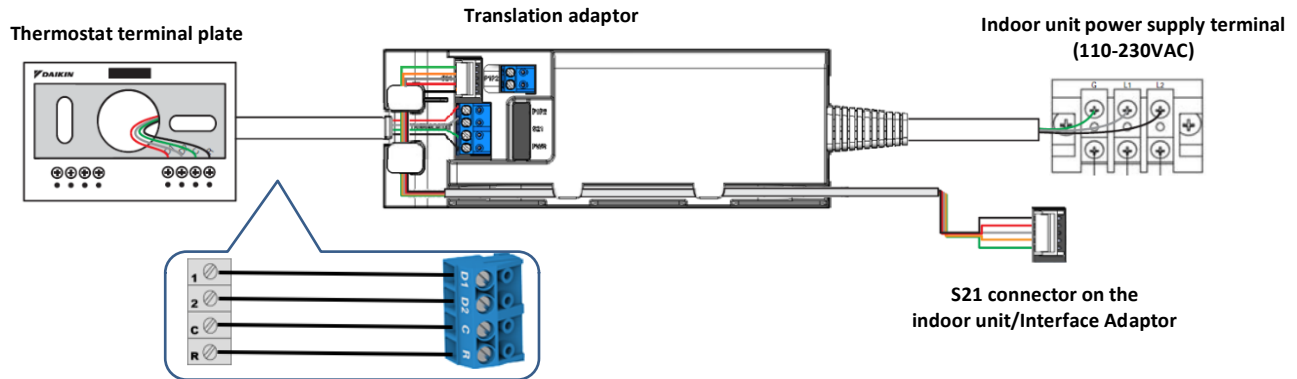

- For P1P2 indoor units

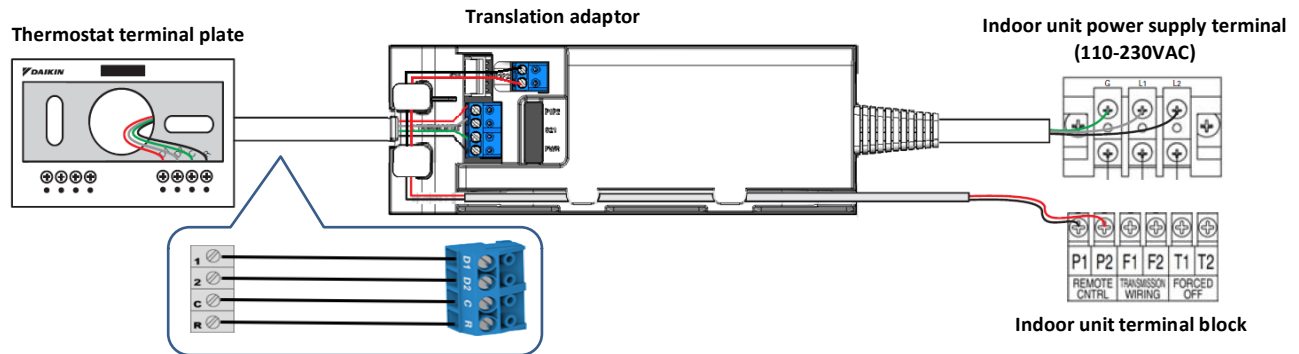

DIMENSIONS:

©2026 DAIKIN COMFORT TECHNOLOGIES MANUFACTURING, INC. • 19001 Kermier Rd Waller, TX • Printed in the USA.

www.daikincomfort.com www.daikincity.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)



Submittal Data Sheet

DAPT-ONE-VMS for VRV, Mini-Split, and Multi-Split Units

Project Name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____

Approval: _____



Date: _____

Construction: _____

Unit #: _____

Drawing #: _____

- Translation Adaptor:

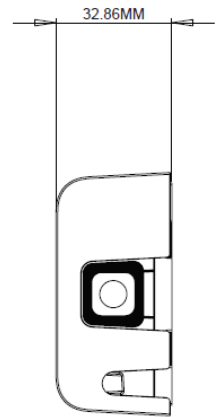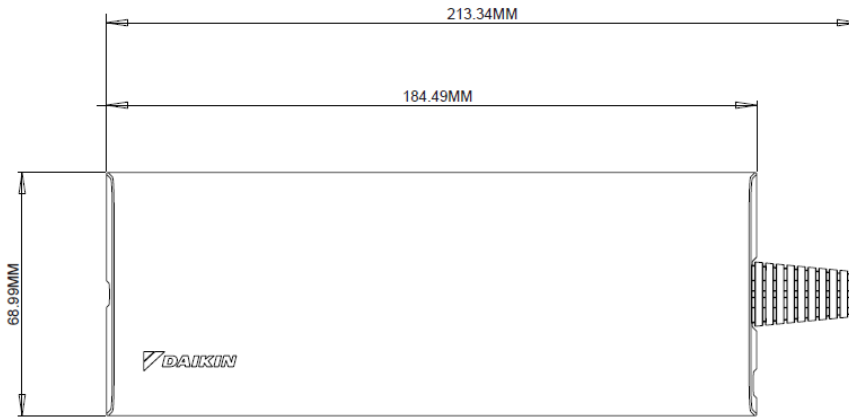

DOCUMENTATION:

Documentation available on www.daikincity.com and/or www.daikincomfort.com

- Installation Manual
- Product Flyer

©2026 DAIKIN COMFORT TECHNOLOGIES MANUFACTURING, INC. • 19001 Kermier Rd Waller, TX • Printed in the USA.

www.daikincomfort.com www.daikincity.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)