




Submittal Data Sheet

Sealing Material of Air Discharge Outlet
KDBH44BA60

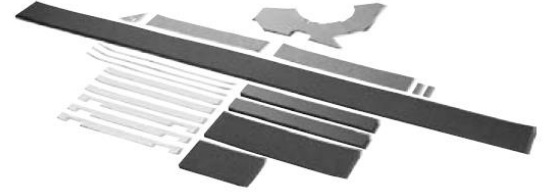

DESCRIPTION

The sealing material seals off air flow discharge outlets on the indoor FXZQ units. The sealing material is used in addition to software field settings as provided in the Installation Manual. Field installation required.

FEATURES

- Ideal for use when placing the unit close to a wall or barrier.
- Allows for up to 5 different air flow configurations.


SPECIFICATIONS

Model No.:	KDBH44BA60
Components Included:	Sealing materials, sealing tape, insulation plates, absorbent material and installation manual
Indoor Unit Compatibility:	FXZQ07MVJU9, FXZQ09MVJU9, FXZQ12MVJU9, FXZQ15MVJU9, FXZQ18MVJU9 FXZQ05TAVJU, FXZQ07TAVJU, FXZQ09TAVJU, FXZQ12TAVJU, FXZQ15TAVJU, FXZQ18TAVJU
Total Kit Shipping Weight:	1 lbs (0.5 kgs)
Sealing Materials:	Polyethylene foam
Seal Material Tape:	Non-woven fabric
Insulation Plate:	Polyethylene foam
Absorbent Material:	Flocking tape

Notes:

- 1) Field installation required.

TYPICAL INSTALLATION

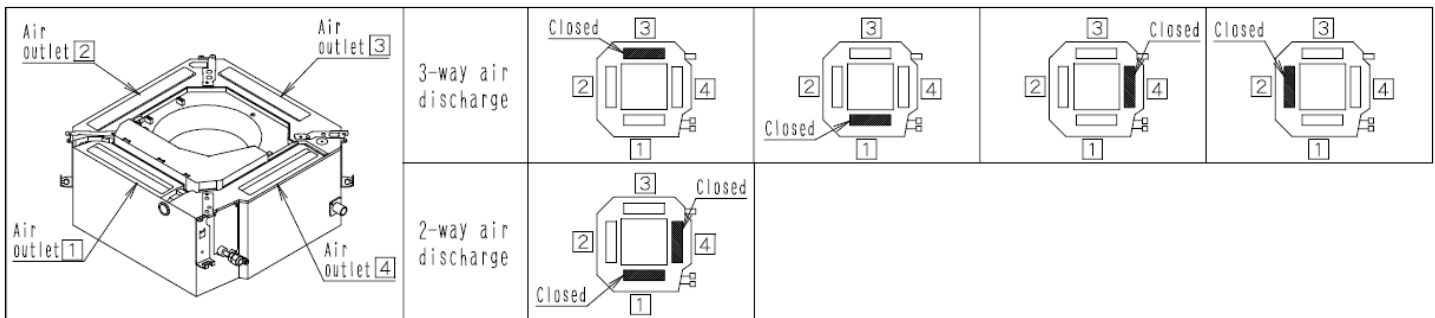

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056
www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations).