



Submittal Data Sheet

Sealing Material for Air Discharge Outlet, Sensing Flow Panel
KDBHQ55B140



Note: Actual materials included may differ from photo

DESCRIPTION

The sealing material seals off air flow discharge outlets on the indoor FXFQ units installed with Sensing Flow panel, BYCQ125B-W1. The sealing material is used in addition to software field settings as provided in the Installation Manual. Field installation required.

FEATURES

- Ideal for use when placing the unit close to a wall or barrier.
- Allows for up to 14 different air flow configuration for flexibility in design.


SPECIFICATIONS

Model No.:	KDBHQ55B140
Components Included:	Sealing materials, sealing tape and installation manual
Unit Compatibility:	FXFQ07TVJU, FXFQ09TVJU, FXFQ12TVJU, FXFQ15TVJU, FXFQ18TVJU, FXFQ24TVJU, FXFQ30TVJU, FXFQ36TVJU, FXFQ48TVJU
Total Kit Shipping Weight:	1 lbs (0.5 kgs)
Sealing materials:	Polyethylene foam
Seal material tape:	Non-woven fabric
Allowable Blow Patterns:	4-way and 3-way

Notes:

- 1) Field installation required.

TYPICAL INSTALLATION DRAWINGS

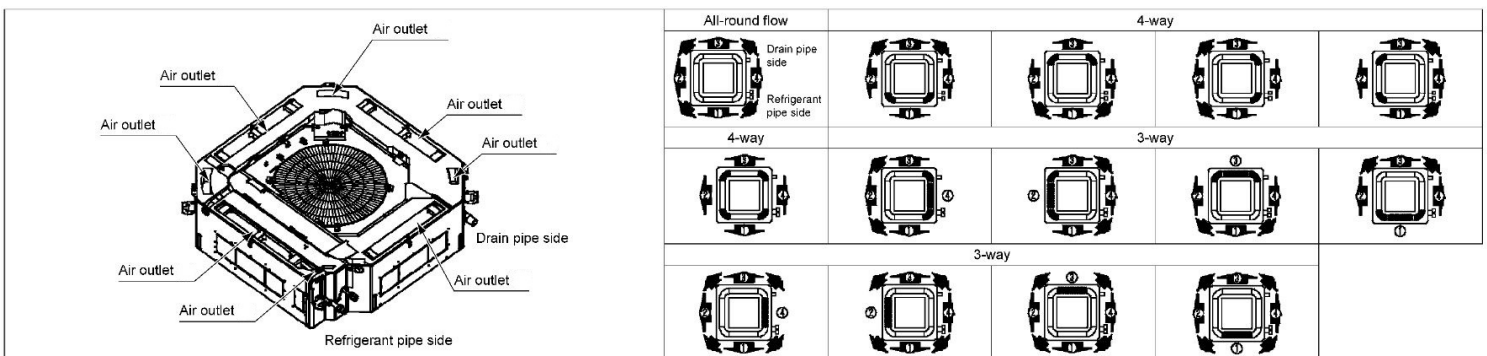

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056
www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations).