



Submittal Data Sheet

PSPAC-DS – Duct Temperature Sensor

Project Name:	Approval:
Location:	Date:
Engineer:	Construction:
Submitted to:	Unit #:
Submitted by:	Drawing #:
Reference:	


MODEL COMPATIBILITY:

Compatible with models: D4271C, D4272C, DT4272C, DT4273C, DT4272, DT4273

SPECIFICATIONS:

Model	PSPAC-DS
Description	Duct Temperature Sensor
Dimensions	0.125" x .375"
Measurement Range	-40°F to 131°F
Lead Length	20 ft. plenum rated
Max Wire Length	200 ft

PRODUCT IMAGE:

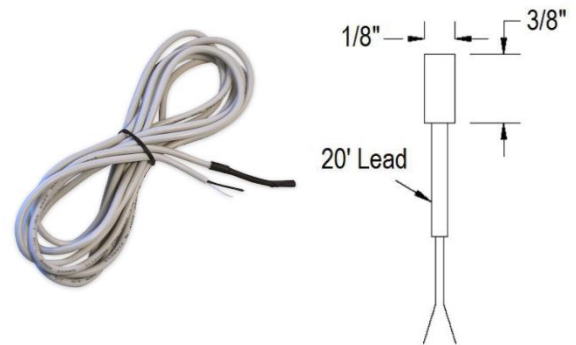

FEATURES:


- Can be used as a Return, Supply, or Outdoor Air Temperature Sensor
- Return sensor: can be set to control, monitor, or average with the thermostat sensor
- Supply Air Temperature Sensor: Configurable alerts for system performance
- Outdoor Temp Sensor: track high and low temperatures for the day
- Recommended wire type: 18-22 gauge, 2-conductor, unshielded. Solid or stranded.
- Maximum wire length is 200 feet
- Includes a grommet for installation through a 1/4" hole.

Daikin North America LLC, 19001 Kermier Rd, Waller TX, 77484
www.daikinac.com www.daikincity.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Project Name:	Approval:
Location:	Date:
Engineer:	Construction:
Submitted to:	Unit #:
Submitted by:	Drawing #:
Reference:	

WIRING INSTRUCTIONS:

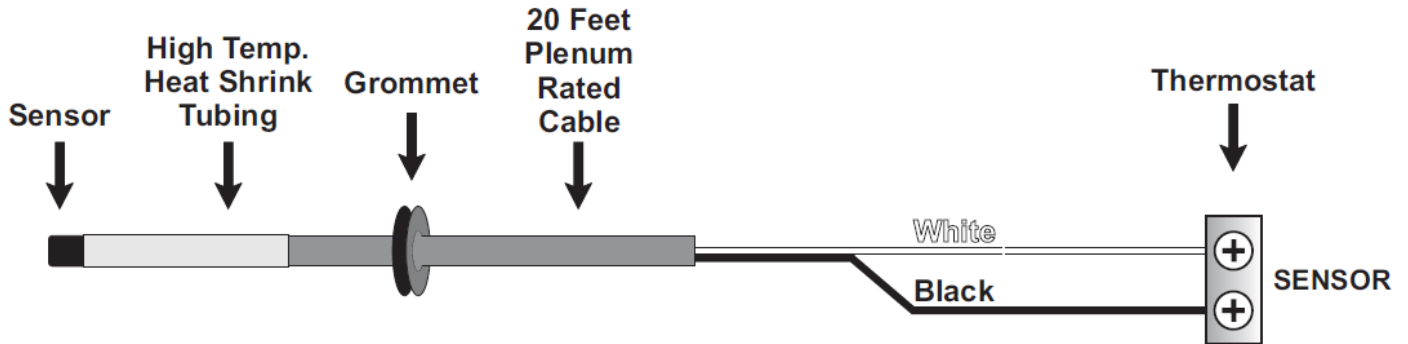

Sensor wiring is not polarity sensitive.

DOCUMENTATION:

Documentation available on www.daikincity.com, www.daikinac.com and/or www.daikinthermostats.com:

- Submittal
- Installation Manual