



## DTH SERIES

3 - 5 TONS HEAT PUMPS  
15 SEER UP TO 13.0 EER / 8.2 HSPF

Cooling Capacity: 35,000 – 60,000 BTU/h

Heating Capacity: 32,800 – 55,500 BTU/h

### SUBMITTAL DATA FORM

Job Name \_\_\_\_\_

Location \_\_\_\_\_

Purchaser \_\_\_\_\_

Order No. \_\_\_\_\_

Engineer \_\_\_\_\_

Unit No. \_\_\_\_\_

Model No. \_\_\_\_\_

Unit Designation \_\_\_\_\_

Performance Data Certified By: \_\_\_\_\_

#### ■ Standard Features

- High-efficiency scroll compressor
- Copper tube / aluminum fin coils
- High- and low-pressure switches
- Refrigerant accumulator
- Contactor with lugs
- High-capacity, steel-cased filter drier
- Heater kits with single-point entry
- 24-volt terminal strip
- Convertible airflow orientation
- Easy to service
- Built-in filter rack with standard 2" filters
- Bottom utility entry
- AHRI Certified; ETL Listed
- 3-phase unit meets the performance specified as of 1/1/2015 in Table 6.8.1-2 of ASHRAE Standard 90.1-2013

#### ■ Cabinet Features

- Heavy-gauge, galvanized-steel cabinet with UV-resistant powder-paint finish
- Full Perimeter Rail
- Sloped drain pan



\* Complete warranty details available from your local dealer or at [www.daikincomfort.com](http://www.daikincomfort.com).

**PERFORMANCE DATA****Cooling Performance**

Tota Capacity \_\_\_\_\_ MBH  
Sensible Capacity \_\_\_\_\_ MBH  
Outdoor Design TMP \_\_\_\_\_ °F DB / WB  
Air Temp entering \_\_\_\_\_  
Evaporator Coil \_\_\_\_\_ °F  
Power Input Required \_\_\_\_\_ kW  
(less blower motor)

**Heating Performance**

Total Heating Capacity \_\_\_\_\_ kW  
\_\_\_\_\_ BTU/h

**Supply Air Blower Performance**

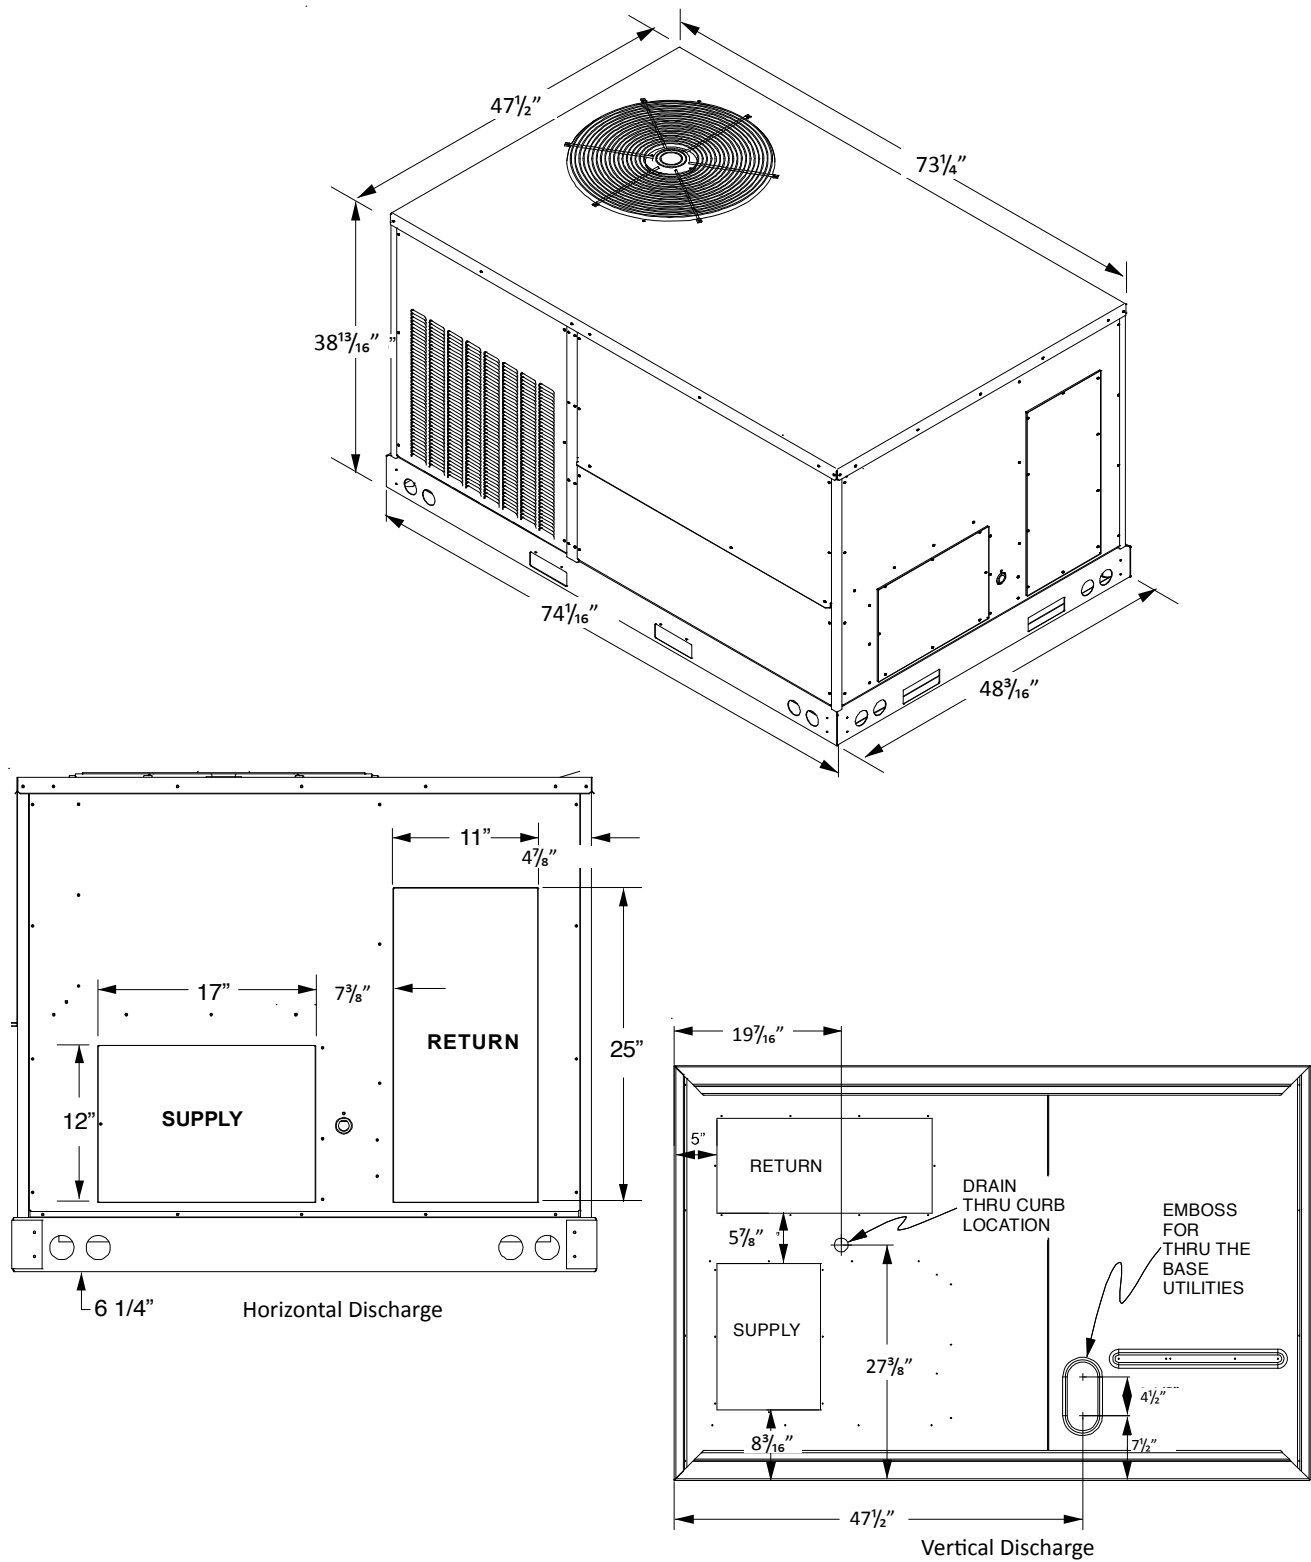
Total Supply Air \_\_\_\_\_ CFM  
Ext. Static Pressure \_\_\_\_\_ IWG  
Blower Speed \_\_\_\_\_ RPM  
Power Output Required \_\_\_\_\_ BHP  
Motor Ratings \_\_\_\_\_ HP  
Power Input Required \_\_\_\_\_ kW

**Electrical Data**

Power Supply \_\_\_\_\_  
Total Unit Amps \_\_\_\_\_ Amps

**Max Overcurrent Device:**

Fuse \_\_\_\_\_ Breaker \_\_\_\_\_ Amps \_\_\_\_\_

***DIMENSIONS***

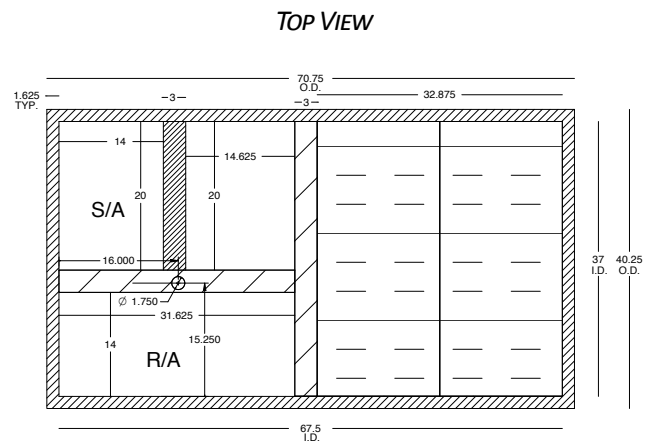
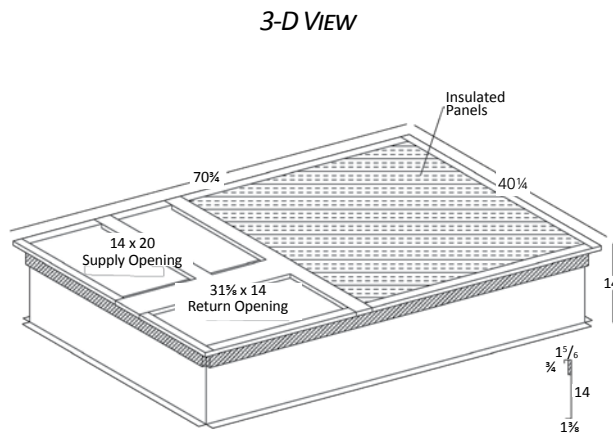
**ACCESSORIES LIST**

DAIKIN MASTER ITEM #	DESCRIPTION	FITS MODEL SIZES	FIELD- INSTALLED	FACTORY- INSTALLED	✓
	<b>Curb</b>				
14CURB3672	14" Roof Curb	3-5 tons	✓		
18CURB3672B	18" Roof Curb	3-5 tons	✓		
24CURB3672B	24" Roof Curb	3-5 tons	✓		
GHRC-3672	Hurricane Restraint Clips	3-5 tons	✓		
	<b>Ultra Low-Leak Economizer &amp; Power Exhaust<sup>1</sup></b>				
10-365-09C	Ultra Low-Leak Downflow Economizer w/ Dry Bulb	3-5 Tons	✓		
10-366-09C	Ultra Low-Leak Downflow Economizer w/ Enthalpy	3-5 Tons	✓	✓	
10-395-09	Ultra Low-Leak Horizontal Economizer w/ Dry Bulb	3-5 Tons	✓		
10-396-09	Ultra Low-Leak Horizontal Economizer w/ Enthalpy	3-5 Tons	✓		
10-455-09*-23	Centrifugal Power Exhaust 230v	3-5 Tons	✓		
10-457-09xA-23	Modulating Power Exhaust 208-230v	3-5 Tons	✓		
10-465-09-21	Prop Power Exhaust 230v	3-5 Tons	✓		
	<b>Low-Leak Economizer &amp; Power Exhaust<sup>2</sup></b>				
DDNECNJ3672C	Low-Leak Downflow Economizer	3-5 tons	✓	✓	
DPE36722	Downflow Power Exhaust (208/230 Volt)	3-5 tons	✓		
DHZEENJ3672	Horizontal Economizer	3-5 tons	✓		
DHPE36722	Horizontal Power Exhaust (208/230 Volt)	3-5 tons	✓		
	<b>Downflow Accessories</b>				
D25FD3672	25% Manual Fresh Air Damper	3-5 tons	✓		
D25MFD3672	25% Motorized Fresh Air Damper	3-5 tons	✓		
DDNBBS3672	Burglar Bar Sleeves with Supply & Return	3-5 tons	✓		
DDNECNJ3672NR	Downflow Economizer2 w/o Barometric Relief	3-5 tons	✓		
DDNSQRD3616	Downflow Square-to-Round Adapter (16" Round)	3 tons	✓		
DDNSQRD487218	Downflow Square-to-Round Adapter (18" Round)	4-5 tons	✓		
	<b>Horizontal Accessories</b>				
DBRD3672	Horizontal Barometric Relief Damper	3-5 tons	✓		
	<b>Concentrics</b>				
CDK36	Concentric Duct Kit	3 tons	✓		
CDK4872	Concentric Duct Kit	4-5 tons	✓		
	<b>1 phase 208-230V Electric Heat Kits</b>				
SPKT01	Single Point Wiring Kit 1phase Heat Kits	3-5 tons	✓	✓	
EHK1-10	10kw 208-230 1ph Electric Heat Kit	3-5 tons	✓	✓	
EHK1-15	15kw 208-230 1ph Electric Heat Kit	3-5 tons	✓	✓	
EHK1-18	18kw 208-230 1ph Electric Heat Kit	4 tons	✓	✓	
EHK1-20	20kw 208-230 1ph Electric Heat Kit	5 tons	✓	✓	
	<b>3 phase 208-230V Electric Heat Kits</b>				
SPKT03	Single Point Wiring Kit 3phase Heat Kits	3-5 tons	✓	✓	
EHK3-10	10kw 208-230 3ph Electric Heat Kit	3-5 tons	✓	✓	
EHK3-15	15kw 208-230 3ph Electric Heat Kit	3-5 tons	✓	✓	

## ACCESSORIES LIST (CONT.)

DAIKIN MASTER ITEM #	DESCRIPTION	FITS MODEL SIZES	FIELD- INSTALLED	FACTORY- INSTALLED	✓
EHK3-18	18kw 208-230 3ph Electric Heat Kit	4 tons	✓	✓	
EHK3-20	20kw 208-230 3ph Electric Heat Kit	5 tons	✓	✓	
	<b>DDC Accessories<sup>3</sup></b>				
	DDC communicating controller (built-in BACnet® MS/TP) includes Standard Room Sensor to be installed in field	3-5 tons		✓	
10366D09C	DDC Ultra Low-Leak Downflow Economizer	3-5 tons	✓	✓	
10366D09	DDC Ultra Low-Leak Horizontal Economizer	3-5 tons	✓		
10465DDC	Power Exhaust kit used with DDC Ultra Low-Leak Economizer	3-5 tons	✓		
DLAKT01	Low-Ambient	3-5 tons	✓	✓	
LONKT01	LonWorks® card	3-5 tons	✓		
3PMK01	Phase Monitor (3-Phase Only)	3-5 tons	✓	✓	
DFSKT01	Dirty Filter Switch	3-5 tons	✓		
	<b>Crankcase Heater Kits</b>				
0163R00002S	40W 230V	3 tons	✓		
0130L00017S	70W 230V	4 - 5 tons	✓		
	<b>High Efficiency Filters</b>				
0160L00203	High Efficiency MERV 13 Air Filter Nom. Size: 24x24x2; (Order Qty 1)	3 tons	✓		
0160L00204	High Efficiency MERV 13 Air Filter Nom. Size: 14x20x2; (Order Qty 4)	4 tons	✓		
0160L00205	High Efficiency MERV 13 Air Filter Nom. Size: 16x20x2; (Order Qty 4)	5 tons	✓		
	<b>Misc Accessories</b>				
HAILGD03D	Condenser Coil Hail Guard	3-5 tons	✓		
HAILGD04D	Condenser Coil Hail Guard	5 tons	✓		
	Convenience Outlet: Non Powered	3-5 tons		✓	
	Convenience Outlet: Powered	3-5 tons		✓	
LAKT11	Low Ambient Kit, 208-230V - non-DDC	3-4 tons	✓	✓	
LAKT12	Low Ambient Kit, 208-230V - non-DDC	5 tons	✓	✓	
3PMNDK01	Phase Monitor (3-Phase Only) - Non DDC	3-5 tons	✓	✓	
	Smoke Detector (supply and/or return air)	3-5 tons		✓	
	Hinged Panels	3-5 tons		✓	

<sup>1</sup> Use Economizer & Power Exhaust listed within Ultra Low-Leak section<sup>2</sup> Use Economizer & Power Exhaust listed within Low-Leak section<sup>3</sup> For a full list of DDC accessories, please refer to DDC Controller Technical Guide manual (DK-DDC-TGD-01B)**Note:** Where multiple variations are available, the heaviest combination is listed.

**ROOF CURB — #D14CURB3672****SPECIFICATIONS**

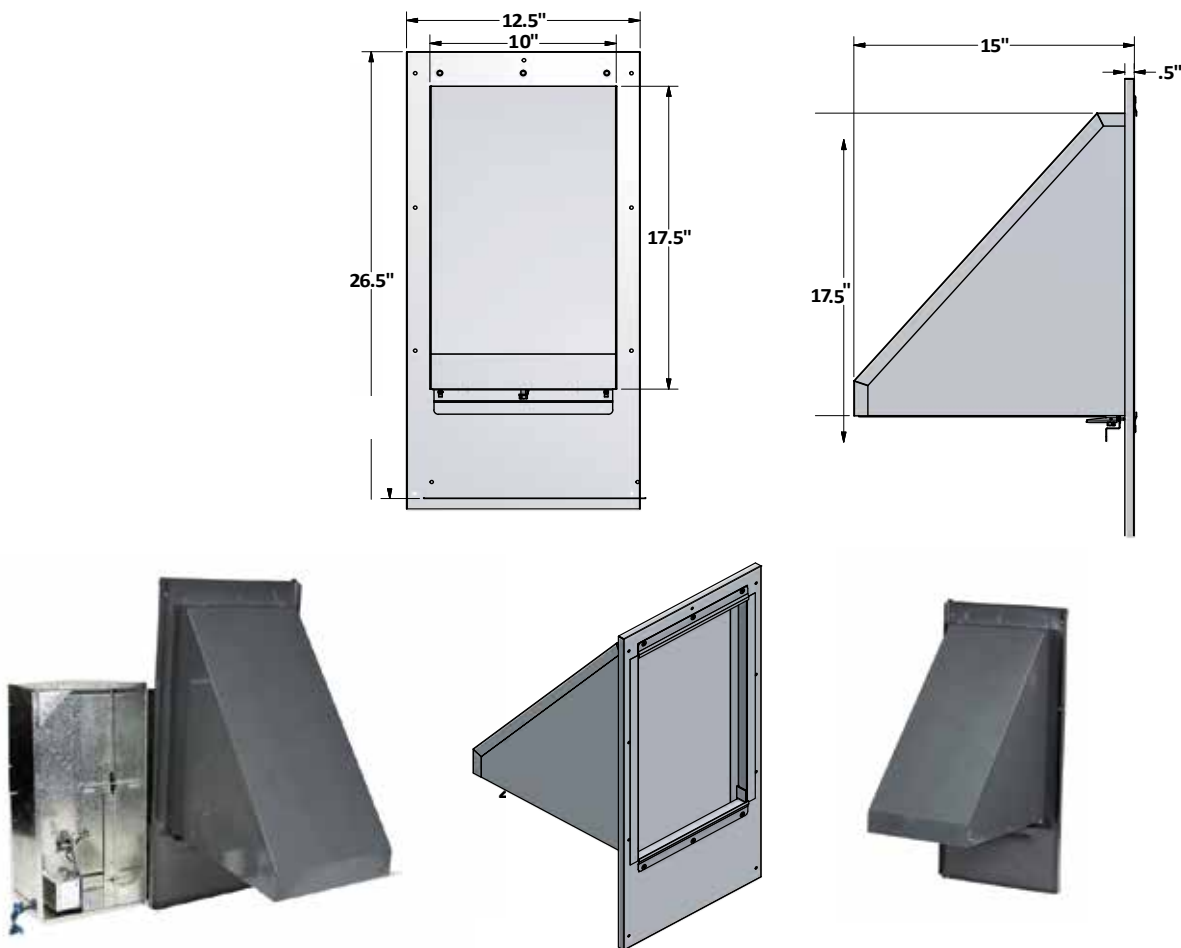
- 14" Tall
- 18-Gauge Construction
- 1x4 Wood Nailer
- Shipped knocked down with all hardware
- Gasket included
- Bed-rail style corners
- Weighs 95 lbs

Note: outside duct dimension should be 1/2" less than opening dimensions above.

**NO CURB ADAPTER REQUIRED WHEN REPLACING CARRIER & BRYANT MODELS**

No curb adapter is required when replacing an existing Carrier or Bryant RTU with a Daikin RTU in these situations; the footprints and locations of the return and supply duct work match.

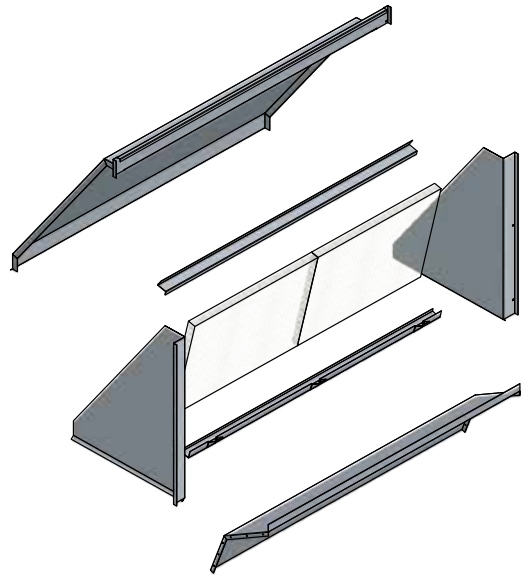
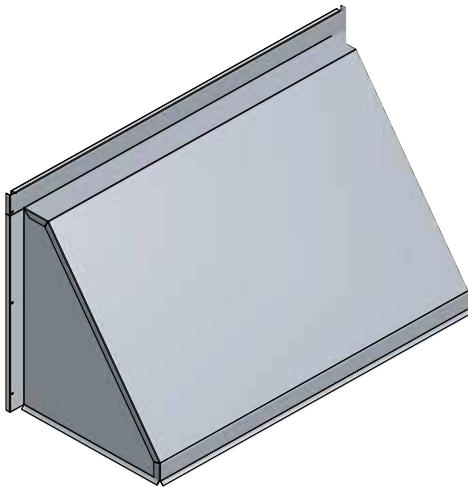
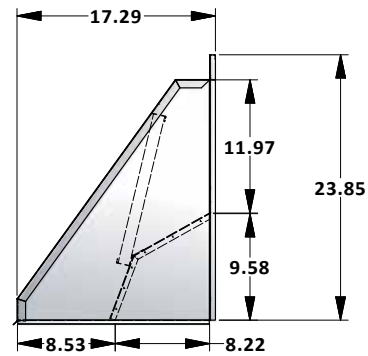
NEW UNIT	EXISTING CARRIER	EXISTING BRYANT
3 TO 5 TONS	48/50 TJ, LJ, DJ, QJ 48/50 TM, HJ 004 - 007	580C-D, 558C-D, 548C-D 580F, 558F, 581B 036 - 072

**MANUAL FRESH AIR DAMPER — #D25FD3672****MOTORIZED FRESH AIR DAMPER — #D25MFD3672****SPECIFICATIONS****D25FD3672 Manual Damper**

- Provides up to 25% fresh air
- Slide damper for easy adjustment
- Weighs 12 pounds

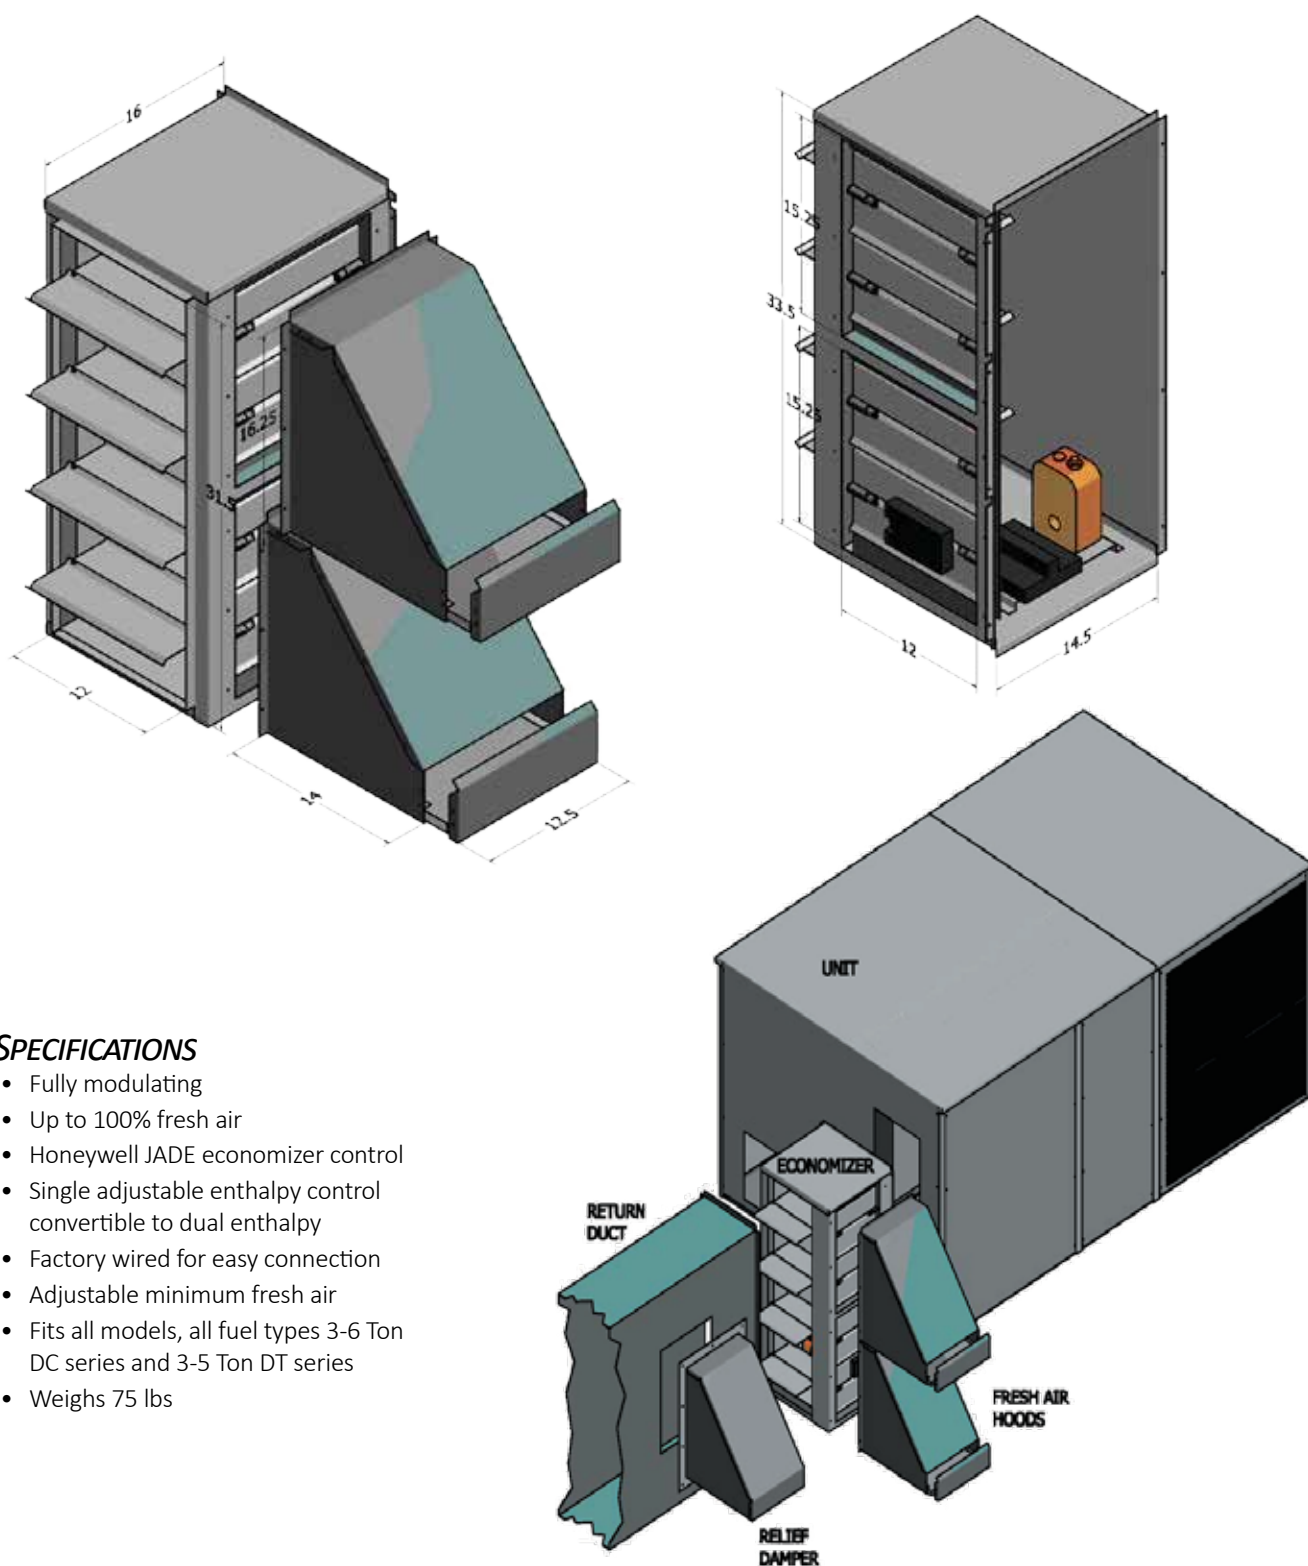
**D25MFD3672 Motorized Damper**

- 24 VAC Damper motor with spring return
- Factory wired for easy connection
- Weighs 14 pounds
- Fits all 3 - 6 on package units in all fuels
- All dampers painted to match daikin units

**DOWNFLOW ECONOMIZER — #DDNECNJ3672B****SPECIFICATIONS**

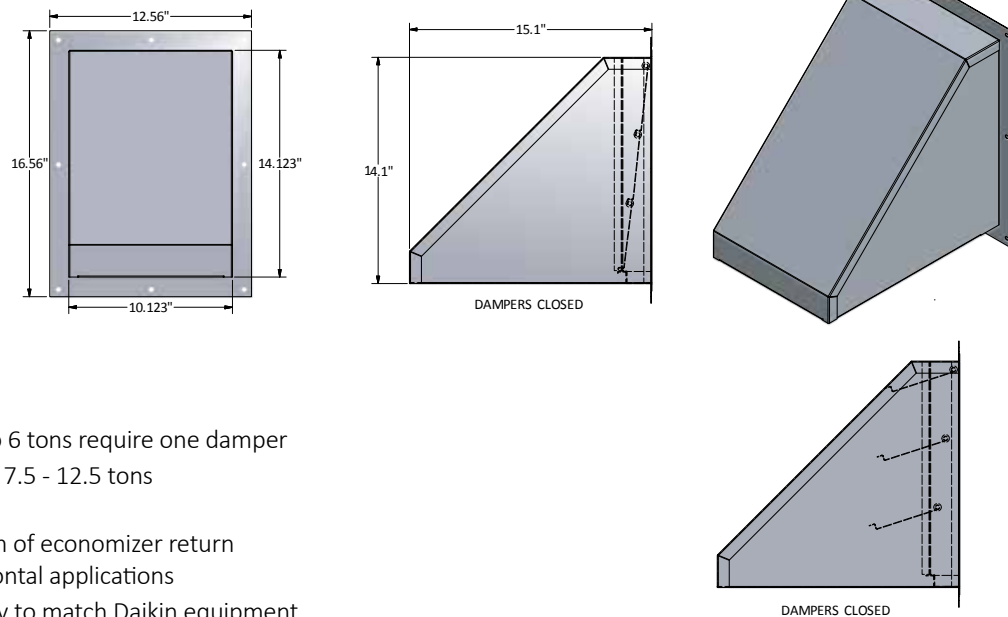
- Fully modulating
- Up to 100% fresh air
- Integral barometric relief
- Hoods painted to match unit
- Honeywell JADE economizer control
- Single adjustable enthalpy control convertible to dual enthalpy
- Adjustable minimum fresh air
- Fits all models, all fuel types 3-6 Ton DC series and 3-5 Ton DT series
- Weighs 65 lbs



**HORIZONTAL ECONOMIZER — #DHZECNJ3672****SPECIFICATIONS**

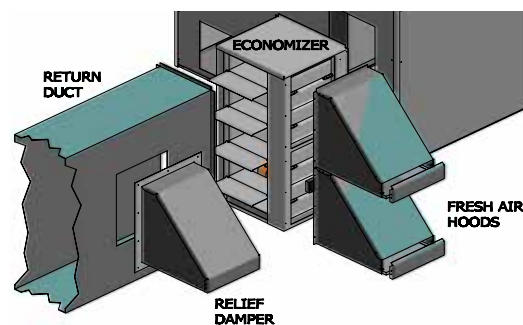
- Fully modulating
- Up to 100% fresh air
- Honeywell JADE economizer control
- Single adjustable enthalpy control convertible to dual enthalpy
- Factory wired for easy connection
- Adjustable minimum fresh air
- Fits all models, all fuel types 3-6 Ton DC series and 3-5 Ton DT series
- Weighs 75 lbs

## BAROMETRIC RELIEF DAMPER — #DBRD3672

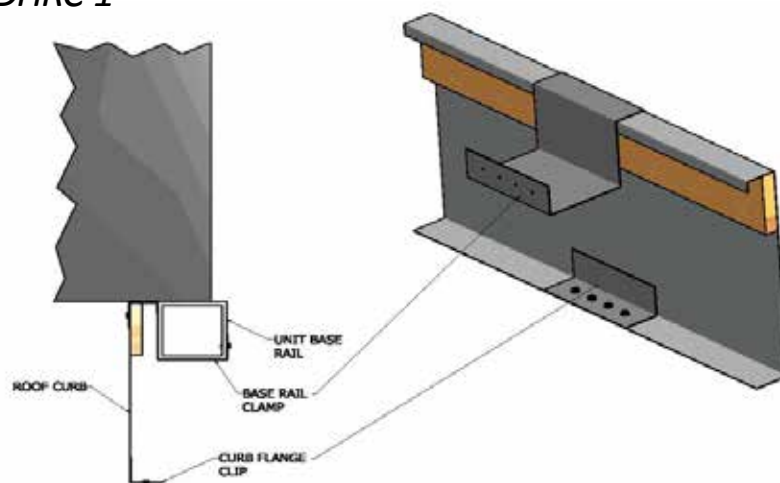


### SPECIFICATIONS

- Applications up to 6 tons require one damper
- Applications from 7.5 - 12.5 tons require 2 damper
- Installed upstream of economizer return dampers in Horizontal applications
- Painted nickle gray to match Daikin equipment
- Weighs 15 pounds



## HURRICANE / SEISMIC CLIP — DHRC-1

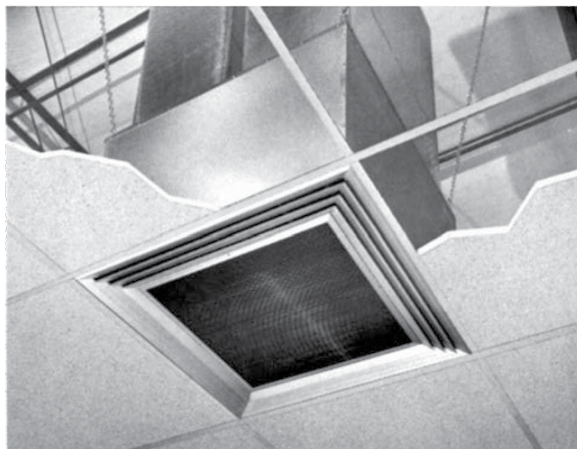


### SPECIFICATIONS

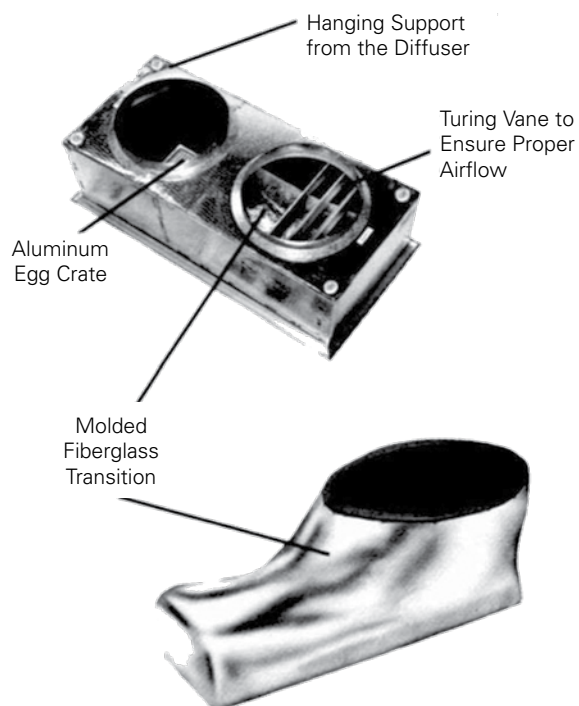
- 14-gauge construction typical
- Location and quantity of clips dictated local code and unit size
- Optional angle for seismic applications
- Weigh 2 pounds each

**CONCENTRIC DUCT KIT — #CDK36 / #CDK4872**

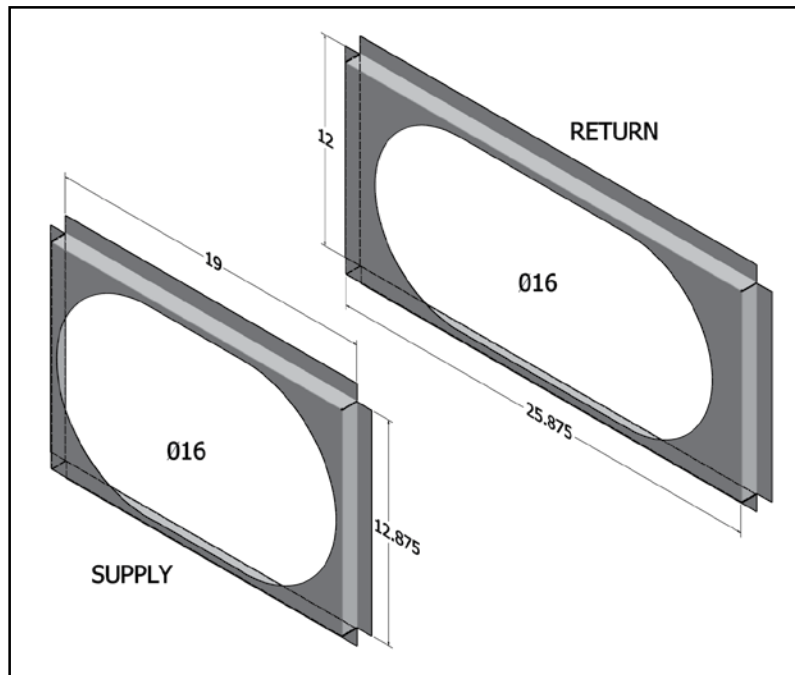
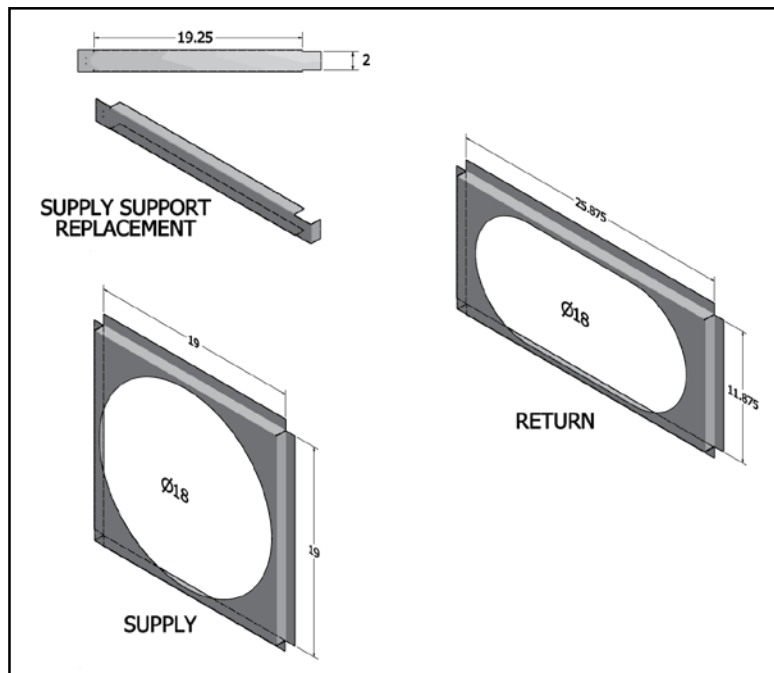
Light Commercial  
T-Bar Ceiling



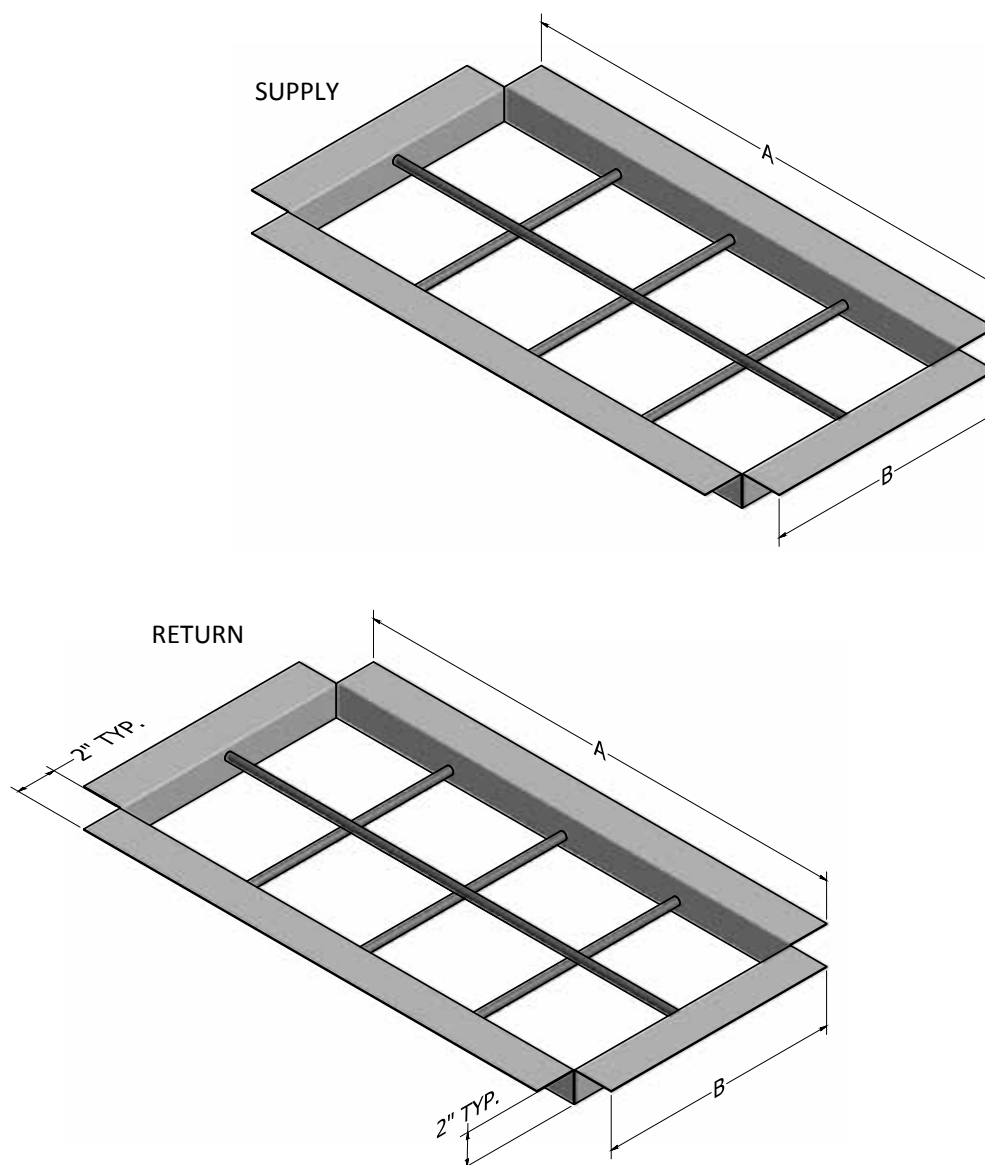
Commercial  
T-Bar Ceiling

**SPECIFICATIONS**

- All-aluminum diffuser with aluminum return air egg crate
- Built-in anti-sweat gasket
- Molded fiberglass transition (through five tons)
- Built-in hanging supports
- Diffuser box constructed of fiberglass duct board (through 7½ tons) or sheet metal

**3-TON SQUARE-TO-ROUND — #DDNSQRD3616****4- TO 5-TON SQUARE-TO-ROUND — #DDNSQRD487218**

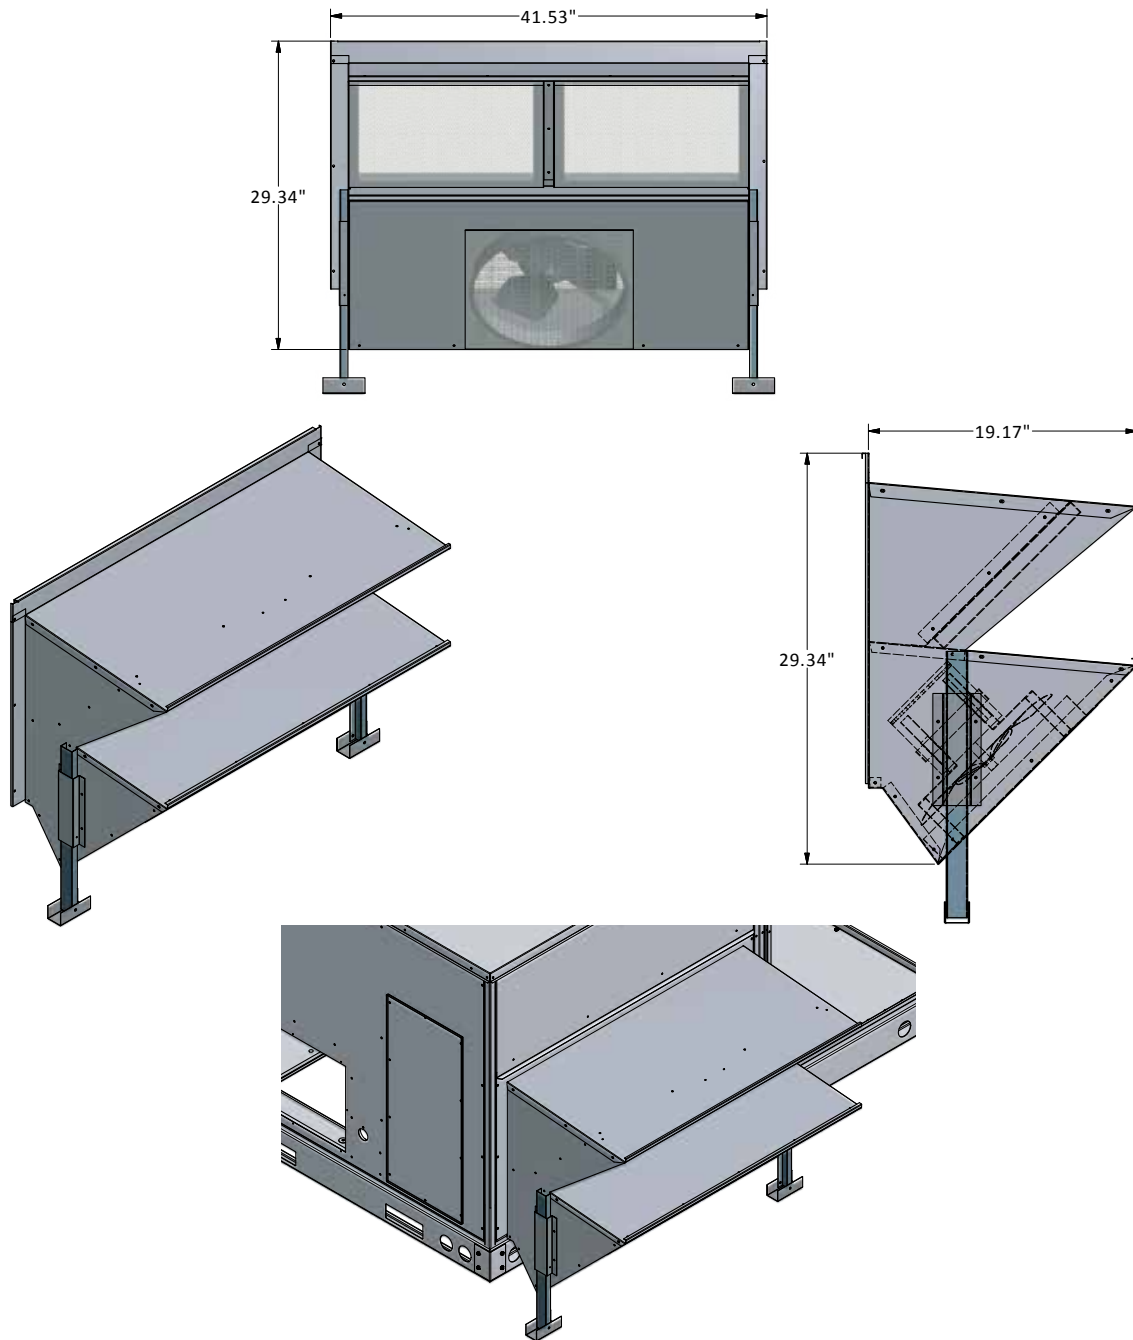
## DOWNFLOW BURGLAR BAR SLEEVES – #DDNBBS3672



Part Number	Return 'A'	Return 'B'	Supply 'A'	Supply 'B'
DNBBS3672B	30 $\frac{3}{8}$	13 $\frac{1}{4}$	19 $\frac{1}{4}$	13 $\frac{1}{4}$
DNBBS90150	37 $\frac{3}{8}$	13 $\frac{3}{8}$	30 $\frac{3}{8}$	14 $\frac{3}{8}$
DNBBS180240	61 $\frac{1}{8}$	23 $\frac{3}{8}$	61 $\frac{1}{8}$	22 $\frac{3}{4}$

### SPECIFICATIONS

- Fully Welded 18 Gauge Sleeve
- Fully Welded 1/2" Bars
- 8" Openings Standard
- Supply and Return Sleeves Packaged Together
- Install in the Top of the Roof Curb, Inside of the Supply and Return Duct Drops

***DOWNFLOW POWER EXHAUST – #DPE36722******SPECIFICATIONS***

- Propeller type fans
- 208/230V, model available
- Used in conjunction with DDNECNJ3672B
- Up to 100% relief
- Replaces Outside Air/Barometric Relief Hood
- Weighs 58 Pounds

*NOTES*

---

**NOTES**