



DP14GM COMMERCIAL

Cooling Capacities:

34,200 to 57,000 BTU/h

Heating Capacities:

80,000 BTU/h to 120,000 BTU/h

3 - 5 TON, THREE-PHASE
PACKAGED GAS/ELECTRIC

14 SEER / 81% AFUE



■ Contents

Nomenclature	2
Product Specifications	3
Expanded Cooling Data	5
Airflow Specifications	21
Dimensions	22
Wiring Diagrams	23
Accessories	26

■ Standard Features

- Energy-efficient compressor with internal relief valve
- Multi-speed EEM blower motor.
- Heavy duty stainless steel heat exchanger
- Fully charged R-410A system
- All-aluminum evaporator coils
- Gas valve for natural gas with easy conversion to propane
- Direct-spark ignition system includes a microprocessor-based control for the entire ignition sequence
- All blower operation and all safety circuits complete with self-diagnostics
- All models comply with California Low NO_x emission standards
- For installation in California's South Coast Air Quality Management District (SCAQMD) only: This furnace does not meet the SCAQMD Rule 1111 14 ng/J NO_x emission limit, and thus is subject to a mitigation fee of up to \$450. This furnace is not eligible for the SCAQMD Clean Air Furnace Rebate Program: www.CleanAirFurnaceRebate.com.
- All models comply with California Low NO_x standards.
- AHRI Certified; ETL Certified
- Flow-rater expansion device on 3 and 4 ton units, TXV expansion device on 5-ton units.

■ Cabinet Features

- Heavy-gauge galvanized-steel cabinet with Nickel Gray powder-paint finish
- Fully insulated blower compartment with convenient access panels
- Louvered condenser coil protection
- One footprint; two heights
- Bottom 2" high base rails for easier handling
- Fully insulated cabinet
- Horizontal and down-flow applications.



	D	P	14	G	M	36	080	4	3	A	A	
	1	2	3,4	5	6	7,8	9,10,11	12	13	14	15	
BRAND												ENGINEERING
D - Daikin												MINOR REVISIONS
PRODUCT TYPE												ENGINEERING
P - Packaged												MAJOR REVISIONS
SEER												VOLTAGE
14 - 14 SEER												3-208/230 V Three-Phase 60 Hz
UNIT TYPE												REFRIGERANT
G - Gas/Electric												4 - R-410A
H - Heat Pump												
C - Air Conditioner												NOMINAL HEAT INPUT
CONFIGURATION												080 80 MBTU/h
M - Multi-position												120 120 MBTU/h
												TONNAGE NOMINAL
												36 - 3 tons 61 - 5 tons
												48 - 4 tons

	DP14GM36 08043A*	DP14GM36 08043C*	DP14GM48 08043A*	DP14GM48 08043C*
COOLING CAPACITY				
Total BTU/h	34,200	34,200	46,500	46,500
Sensible BTU/h	27,000	27,000	36,800	36,800
SEER / EER	14.0 / 11.0	14.0 / 11.0	14.0 / 11.0	14.0 / 11.0
Decibels	78	78	80	80
AHRI #s	9956309	207252549	9956310	207252551
HEATING CAPACITY				
Input BTU/h	80,000	80,000	80,000	80,000
Output BTU/h	64,000	64,000	64,000	64,000
AFUE	81	81	81	81
Temperature Rise Range	30 - 60	30 - 60	30 - 60	30 - 60
No. of Burners	4	4	4	4
Orifice Size (Natural/Propane)	45 / 1.25MM	45 / 1.25MM	45 / 1.25MM	45 / 1.25MM
EVAPORATOR MOTOR				
Type	EEM	EEM	EEM	EEM
Wheel (D x W)	10" x 9"	10" x 9"	11" x 10"	11" x 10"
Indoor Nominal CFM	1,200	1,200	1,525	1,525
Motor Speed Tap (Cooling)	T4	T4	T4	T4
Horsepower	1/2	1/2	3/4	3/4
EVAPORATOR COIL				
Face Area (ft²)	4.3	4.3	5.7	5.7
Rows Deep/Fins per Inch	4/14	4/14	4/14	4/14
Piston Size (Cooling)	0.068	0.068	0.078	0.076
Drain Size (NPT)	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	62	92	99	107
CONDENSER FAN / COIL				
Horsepower - RPM	1/4 - 830	1/4 - 1,075	1/4 - 1,075	1/3 - 1,122
Diameter / # of Blades	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	2,250	2,850	3,300	3,000
Face Area (ft²)	8.8	11.1	15.4	14.4
Rows Deep/Fins per Inch	2/27	2/27	1/24	2/27
COMPRESSOR				
Quantity / Type	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll
Stage	Single	Single	Single	Single
Compressor RLA/LRA	9.0 / 71.0	9.0 / 71.0	13.1 / 83.1	13.8 / 83.1
ELECTRICAL DATA				
Voltage-Phase (Frequency 60Hz)	208/230-3	208/230-3	208/230-3	208/230-3
Indoor Blower FLA/LRA	3.8/--	3.8	5.4	5.4
Outdoor Fan FLA/LRA	1.5 / 3.0	1.4 / 3.2	1.4/ 2.9	2.0 / 4.4
Min. Circuit Ampacity	16.6	16.5	23.2	24.7
Max. Overcurrent Protection	25 amps	25 amps	35amps	35 amps
Entrance Size Power Supply	1½"	1½"	1½"	1½"
Entrance Size Control Voltage	⅞"	⅞"	⅞"	⅞"
OPERATING / SHIP WEIGHTS (LBS)	458 / 480	496 / 520	523 / 545	533 / 555

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed. Test data was used to calculate the MOP and MCA.

	DP14GM61 08043A*	DP14GM61 08043C*	DP14GM61 12043A*	DP14GM61 12043C*
COOLING CAPACITY				
Total BTU/h	57,000	56,000	57,000	56,000
Sensible BTU/h	42,000	42,000	42,000	42,000
SEER / EER	14.0 / 11	14.0 / 11.0	14.0 / 11	14.0 / 11.0
Decibels	78	78	78	78
AHRI #s	9956311	207252553	9956311	207252553
HEATING CAPACITY				
High-Fire Input / Output	80,000 / 63,000	80,000 / 63,000	120,000 / 94,000	120,000 / 94,000
Low-Fire Input / Output	60,000 / 47,000	60,000 / 47,000	90,000 / 71,000	90,000 / 71,000
AFUE	81	81	81	81
Temperature Rise Range	30 - 60	30 - 60	35 - 65	35 - 65
No. of Burners	4	4	6	6
Orifice Size (Natural/Propane)	45 / 1.25MM	45 / 1.25MM	45 / 1.25MM	45 / 1.25MM
EVAPORATOR MOTOR				
Type	EEM	EEM	EEM	EEM
Wheel (D x W)	11" x 10"	11" x 10"	11" x 10"	11" x 10"
Indoor Nominal CFM	1,750	1325 L / 1700 H	1,750	1325 L / 1700 H
Motor Speed Tap (Cooling)	T3 L / T4 H	T3 L / T4 H	T3 L / T4 H	T3 L / T4 H
Horsepower	1	1	1	1
EVAPORATOR COIL				
Face Area (ft ²)	5.7	5.7	5.7	5.7
Rows Deep/Fins per Inch	4/14	4/14	4/14	4/14
Piston Size (Cooling)	TXV	TXV	TXV	TXV
Drain Size (NPT)	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	100	100	100	100
CONDENSER FAN / COIL				
Horsepower - RPM	1/3 - 1,122	1/3 - 1,122	1/3 - 1,122	1/3 - 1,122
Diameter / # of Blades	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	3,000	3,000	3,000	3,000
Face Area (ft ²)	14.4	14.4	14.4	14.4
COMPRESSOR				
Quantity / Type	1 / Scroll	1 / Scroll	1 / Scroll	1 / Scroll
Stage	Two	Two	Two	Two
Compressor RLA/LRA	16.2 / 110	16.2 / 110	16.2 / 110	16.2 / 110
ELECTRICAL DATA				
Voltage-Phase (Frequency 60Hz)	208/230-3	208/230-3	208/230-3	208/230-3
Indoor Blower FLA/LRA	7.0	7.0	7.0	7.0
Outdoor Fan FLA/LRA	2.0 / 4.40	2.0 / 4.40	2.0 / 4.40	2.0 / 4.40
Min. Circuit Ampacity	29.3	29.3	29.3	29.3
Max. Overcurrent Protection	45 amps	45 amps	45 amps	45 amps
Entrance Size Power Supply	1½"	1½"	1½"	1½"
Entrance Size Control Voltage	⅝"	⅝"	⅝"	⅝"
OPERATING / SHIP WEIGHTS (LBS)	533 / 555	533 / 555	543 / 565	543 / 565

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed. Test data was used to calculate the MOP and MCA.

IDB		Airflow		Outdoor Ambient Temperature															115															
				65					75					85					95					105					115					
				Entering Indoor Wet Bulb Temperature																														
70	1329	MBh	34.8	36.1	39.5	-	34.0	35.2	38.6	-	33.2	34.4	37.7	-	32.4	33.6	36.8	-	30.8	31.9	34.9	-	28.5	29.5	32.4	-	30.8	31.9	34.9	-	28.5	29.5	32.4	-
		S/T	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.84	0.70	0.49	-	0.87	0.73	0.50	-	0.90	0.75	0.52	-	0.91	0.76	0.53	-	0.90	0.75	0.52	-	0.91	0.76	0.53	-
		ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-	19	17	13	-	18	16	12	-
		kW	2.39	2.44	2.51	-	2.57	2.63	2.71	-	2.73	2.79	2.88	-	2.87	2.94	3.03	-	2.99	3.06	3.16	-	3.10	3.17	3.27	-	2.99	3.06	3.16	-	3.10	3.17	3.27	-
		Amps	10.0	10.2	10.5	-	10.7	10.9	11.2	-	11.5	11.7	12.1	-	12.2	12.5	12.8	-	12.9	13.2	13.6	-	13.6	13.9	14.3	-	12.9	13.2	13.6	-	13.6	13.9	14.3	-
		HI PR	249	268	283	-	280	301	318	-	318	342	361	-	362	390	412	-	407	438	463	-	450	484	512	-	407	438	463	-	450	484	512	-
70	LO PR	LO PR	111	119	129	-	118	125	137	-	122	130	142	-	129	137	149	-	135	143	157	-	139	148	162	-	135	143	157	-	139	148	162	-
		MBh	33.8	35.0	38.4	-	33.0	34.2	37.5	-	32.2	33.4	36.6	-	31.4	32.6	35.7	-	29.9	31.0	33.9	-	27.7	28.7	31.4	-	29.9	31.0	33.9	-	27.7	28.7	31.4	-
		S/T	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.87	0.72	0.50	-	0.86	0.72	0.50	-	0.87	0.72	0.50	-
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-	20	17	13	-	19	16	12	-
		kW	2.37	2.42	2.49	-	2.55	2.60	2.69	-	2.71	2.77	2.86	-	2.85	2.91	3.01	-	2.97	3.03	3.13	-	3.07	3.14	3.24	-	2.97	3.03	3.13	-	3.07	3.14	3.24	-
		Amps	9.9	10.1	10.4	-	10.6	10.8	11.1	-	11.4	11.6	12.0	-	12.1	12.4	12.7	-	12.8	13.1	13.5	-	13.5	13.8	14.2	-	12.8	13.1	13.5	-	13.5	13.8	14.2	-
1038	HI PR	HI PR	247	265	280	-	277	298	315	-	315	339	358	-	359	386	407	-	403	434	458	-	446	480	507	-	403	434	458	-	446	480	507	-
		LO PR	110	117	128	-	117	124	135	-	121	129	141	-	127	135	148	-	133	142	155	-	138	147	160	-	133	142	155	-	138	147	160	-
		MBh	31.2	32.3	35.4	-	30.5	31.6	34.6	-	29.7	30.8	33.8	-	29.0	30.1	33.0	-	27.6	28.6	31.3	-	25.5	26.5	29.0	-	27.6	28.6	31.3	-	25.5	26.5	29.0	-
		S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-
		ΔT	20	17	13	-	20	18	13	-	20	18	13	-	21	18	14	-	20	18	13	-	19	16	12	-	20	18	13	-	19	16	12	-
		kW	2.31	2.36	2.43	-	2.49	2.54	2.62	-	2.64	2.70	2.79	-	2.78	2.84	2.93	-	2.90	2.96	3.06	-	3.00	3.06	3.16	-	2.90	2.96	3.06	-	3.00	3.06	3.16	-
75	1329	Amps	9.7	9.9	10.1	-	10.3	10.6	10.9	-	11.1	11.4	11.7	-	11.8	12.1	12.4	-	12.5	12.7	13.1	-	13.1	13.4	13.8	-	12.5	12.7	13.1	-	13.1	13.4	13.8	-
		HI PR	239	258	272	-	269	289	305	-	305	329	347	-	348	374	395	-	391	421	445	-	432	465	491	-	391	421	445	-	432	465	491	-
		LO PR	107	114	124	-	113	120	131	-	118	125	137	-	124	131	143	-	129	138	150	-	134	142	155	-	129	138	150	-	134	142	155	-
		MBh	35.4	36.4	39.5	42.3	34.6	35.6	38.5	41.4	33.8	34.8	37.6	40.4	32.9	33.9	36.7	39.4	31.3	32.2	34.9	37.4	29.0	29.8	32.3	34.7	31.3	32.2	34.9	37.4	29.0	29.8	32.3	34.7
		S/T	0.90	0.81	0.61	0.39	0.93	0.84	0.63	0.41	0.96	0.86	0.65	0.42	0.99	0.88	0.67	0.43	1.00	0.92	0.69	0.45	1.00	0.93	0.70	0.45	1.00	0.92	0.69	0.45	1.00	0.93	0.70	0.45
		ΔT	22	20	17	11	22	21	17	12	22	21	17	12	23	21	17	12	22	20	17	12	20	19	16	11	22	20	17	12	20	19	16	11
75	1184	kW	2.41	2.46	2.53	2.62	2.59	2.65	2.73	2.82	2.75	2.81	2.90	3.00	2.90	2.96	3.06	3.16	3.02	3.09	3.19	3.30	3.12	3.19	3.30	3.41	3.02	3.09	3.19	3.30	3.12	3.19	3.30	3.41
		Amps	10.1	10.3	10.6	10.9	10.8	11.0	11.3	11.7	11.6	11.8	12.2	12.6	12.3	12.6	12.9	13.4	13.0	13.3	13.7	14.2	13.7	14.0	14.4	14.9	13.0	13.3	13.7	14.2	13.7	14.0	14.4	14.9
		HI PR	252	271	286	298	282	304	321	335	321	346	365	381	366	394	416	434	412	443	468	488	455	489	517	539	412	443	468	488	455	489	517	539
		LO PR	113	120	131	139	119	127	138	147	124	132	144	153	130	138	151	161	136	145	158	168	141	150	164	174	136	145	158	168	141	150	164	174
		MBh	34.4	35.4	38.3	41.1	33.6	34.6	37.4	40.2	32.8	33.7	36.5	39.2	32.0	32.9	35.6	38.2	30.4	31.3	33.8	36.3	28.1	29.0	31.4	33.7	30.4	31.3	33.8	36.3	28.1	29.0	31.4	33.7
		S/T	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.91	0.82	0.62	0.40	0.94	0.84	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.88	0.67	0.43	0.98	0.88	0.66	0.43	0.99	0.88	0.67	0.43
75	1038	ΔT	23	21	17	12	23	21	18	12	23	21	18	12	23	21	18	12	23	21	17	12	22	20	16	11	23	21	17	12	22	20	16	11
		kW	2.39	2.44	2.51	2.59	2.57	2.63	2.71	2.80	2.73	2.79	2.88	2.98	2.87	2.94	3.03	3.13	2.99	3.06	3.16	3.27	3.10	3.17	3.27	3.38	2.87	2.94	3.03	3.13	3.10	3.17	3.27	3.38
		Amps	10.0	10.2	10.5	10.8	10.7	10.9	11.2	11.6	11.5	11.7	12.1	12.5	12.2	12.5	12.8	13.3	12.9	13.2	13.6	14.1	13.6	13.9	14.3	14.8	12.9	13.2	13.6	14.1	13.6	13.9	14.3	14.8
		HI PR	249	268	283	295	280	301	318	331	318	342	361	377	362	390	412	429	408	439	463	483	450	485	512	534	408	439	463	483	450	485	512	534
		LO PR	112	119	130	138	118	125	137	146	122	130	142	151	129	137	149	159	135	143	157	167	139	148	162	172	135	143	157	167	139	148	162	172
		MBh	31.7	32.7	35.4	37.9	31.0	31.9	34.5	37.1	30.2	31.1	33.7	36.2	29.5	30.4	32.9	35.3	28.0	28.9	31.2	33.5	26.0	26.7	28.9	31.1	28.0	28.9	31.2	33.5	26.0	26.7	28.9	31.1
75	1038	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.62	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41
		ΔT	23	21	18	12	24	22	18	12	24	22	18	12	24	22	18	12	23	22	18	12	22	20	17	11	24	22	18	12	22	20	17	11
		kW	2.33	2.38	2.45	2.53	2.51	2.56	2.64	2.73	2.66	2.72	2.81	2.90	2.80	2.86	2.96	3.05	2.92	2.98	3.08	3.18	3.02	3.09	3.19	3.30	2.86	2.96	3.05	3.18	3.02	3.09	3.19	3.30
		Amps	9.7	9.9	10.2	10.6	10.4	10.6	11.0	11.3	11.2	11.5	11.8	12.2	11.9	12.2	12.5	12.9	12.6	12.9	13.2	13.7	13.2	13.5	14.0	14.4	12.9	13.2	13.7	14.0	13.2			

IDB		Airflow		Outdoor Ambient Temperature												115																						
				65						75						85						95						105										
				Entering Indoor Wet Bulb Temperature																																		
80		1329	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
			S/T	1.00	0.93	0.75	0.56	1.00	0.96	0.78	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.83	0.62	1.00	1.00	0.86	0.64	1.00	1.00	0.87	0.65	1.00	1.00	0.86	0.64	1.00	1.00	0.87	0.65			
			ΔT	25	24	21	16	24	24	21	17	24	24	21	17	23	24	21	17	22	23	21	17	20	21	19	15	22	23	21	17	20	21	19	15			
			kW	2.43	2.48	2.56	2.64	2.61	2.67	2.75	2.84	2.78	2.84	2.93	3.03	2.92	2.99	3.08	3.19	3.04	3.11	3.21	3.32	3.15	3.22	3.33	3.44	3.04	3.11	3.21	3.32	3.15	3.22	3.33	3.44			
			Amps	10.1	10.3	10.6	11.0	10.9	11.1	11.4	11.8	11.7	11.9	12.3	12.7	12.4	12.7	13.1	13.5	13.1	13.4	13.8	14.3	13.8	14.1	14.6	15.1	13.1	13.4	13.8	14.3	13.8	14.1	14.6	15.1			
			Hi PR	254	274	289	301	285	307	324	338	324	349	369	385	370	398	420	438	416	447	472	493	459	494	522	544	416	447	472	493	459	494	522	544			
			Lo PR	114	121	132	141	120	128	140	149	125	133	145	155	131	140	152	162	138	146	160	170	142	151	165	176	138	146	160	170	142	151	165	176			
			80		1184	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
						S/T	0.94	0.88	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.83	0.62	1.00	1.00	0.82	0.61	1.00	1.00	0.83	0.62
ΔT	26	25				21	17	26	25	22	17	26	25	22	17	25	25	22	17	24	25	21	17	22	23	20	16	24	25	21	17	22	23	20	16			
kW	2.41	2.46				2.53	2.62	2.59	2.65	2.73	2.82	2.75	2.81	2.90	3.00	2.90	2.96	3.06	3.16	3.02	3.09	3.19	3.30	3.12	3.19	3.30	3.41	3.02	3.09	3.19	3.30	3.12	3.19	3.30	3.41			
Amps	10.1	10.3				10.6	10.9	10.8	11.0	11.3	11.7	11.6	11.8	12.2	12.6	12.3	12.6	12.9	13.4	13.0	13.3	13.7	14.2	13.7	14.0	14.4	14.9	13.0	13.3	13.7	14.2	13.7	14.0	14.4	14.9			
Hi PR	252	271				286	298	282	304	321	335	321	346	365	381	366	394	416	434	412	443	468	488	455	489	517	539	412	443	468	488	455	489	517	539			
Lo PR	113	120				131	139	119	127	138	147	124	132	144	153	130	138	151	161	136	145	158	168	141	150	164	174	136	145	158	168	141	150	164	174			
1038						MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
						S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.76	0.57	1.03	0.97	0.79	0.59	1.04	0.98	0.80	0.60	1.03	0.97	0.79	0.59	1.04	0.98	0.80	0.60
			ΔT	26	25	22	17	26	25	22	18	26	25	22	18	27	25	22	18	26	25	22	17	24	23	20	16	26	25	22	17	24	23	20	16			
			kW	2.35	2.40	2.47	2.55	2.53	2.58	2.66	2.75	2.69	2.74	2.83	2.93	2.83	2.89	2.98	3.08	2.94	3.01	3.11	3.21	3.05	3.11	3.22	3.32	2.94	3.01	3.11	3.21	3.05	3.11	3.22	3.32			
			Amps	9.8	10.0	10.3	10.6	10.5	10.7	11.0	11.4	11.3	11.5	11.9	12.3	12.0	12.3	12.6	13.1	12.7	13.0	13.4	13.8	13.4	13.7	14.1	14.6	12.7	13.0	13.4	13.8	13.4	13.7	14.1	14.6			
			Hi PR	244	263	277	289	274	295	311	325	312	335	354	369	355	382	403	421	399	430	454	473	441	475	501	523	399	430	454	473	441	475	501	523			
			Lo PR	109	116	127	135	115	123	134	143	120	128	139	148	126	134	146	156	132	141	153	163	137	145	159	169	132	141	153	163	137	145	159	169			
			85		1329	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
						S/T	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.96	0.78	1.00	1.00	0.99	0.80	1.00	1.00	0.90	0.83	1.00	1.00	0.84	0.84	1.00	1.00	0.90	0.83	1.00	1.00	0.84	0.84
ΔT	25	26				24	21	25	25	25	21	24	25	25	21	24	24	25	22	22	23	24	21	21	21	22	20	22	23	24	21	21	21	22	20			
kW	2.45	2.50				2.58	2.66	2.63	2.69	2.78	2.87	2.80	2.86	2.95	3.05	2.95	3.01	3.11	3.21	3.07	3.14	3.24	3.35	3.18	3.25	3.36	3.47	3.07	3.14	3.24	3.35	3.18	3.25	3.36	3.47			
Amps	10.2	10.4				10.7	11.1	10.9	11.2	11.5	11.9	11.8	12.0	12.4	12.8	12.5	12.8	13.2	13.6	13.2	13.5	13.9	14.4	13.9	14.3	14.7	15.2	13.2	13.5	13.9	14.4	13.9	14.3	14.7	15.2			
Hi PR	257	276				292	304	288	310	327	342	328	353	372	388	373	402	424	442	420	452	477	498	464	499	527	550	420	452	477	498	464	499	527	550			
Lo PR	115	122				133	142	121	129	141	150	126	134	147	156	133	141	154	164	139	148	161	172	144	153	167	178	139	148	161	172	144	153	167	178			
1184						MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
						S/T	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.98	0.79	1.00	1.00	0.99	0.80	1.00	1.00	0.98	0.79	1.00	1.00	0.99	0.80
			ΔT	27	27	25	22	27	27	26	22	26	27	26	22	26	26	26	22	24	25	26	22	23	23	24	21	24	25	26	22	24	24	24	21			
			kW	2.43	2.48	2.56	2.64	2.61	2.67	2.75	2.84	2.78	2.84	2.93	3.03	2.92	2.99	3.08	3.19	3.04	3.11	3.21	3.32	3.15	3.22	3.33	3.44	3.04	3.11	3.21	3.32	3.15	3.22	3.33	3.44			
			Amps	10.1	10.3	10.6	11.0	10.9	11.1	11.4	11.8	11.7	11.9	12.3	12.7	12.4	12.7	13.1	13.5	13.1	13.4	13.8	14.3	13.8	14.1	14.6	15.1	13.1	13.4	13.8	14.3	13.8	14.1	14.6	15.1			
			Hi PR	254	274	289	301	285	307	324	338	324	349	369	385	370	398	420	438	416	447	472	493	459	494	522	544	416	447	472	493	459	494	522	544			
			Lo PR	114	121	132	141	120	128	140	149	125	133	145	155	131	140	152	162	138	146	160	170	142	151	165	176	138	146	160	170	142	151	165	176			
			1038			MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
						S/T	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.95	0.77	1.00	1.00	0.94	0.77	1.00	1.00	0.95	0.77
ΔT	28	27				26	22	28	28	26	23	28	28	26	23	27	28	26	23	26	26	26	22	24	24	24	21	26	26	26	22	24	24	24	21			
kW	2.37	2.42				2.49	2.57	2.55	2.60	2.69	2.77	2.71	2.77	2.86	2.95	2.85	2.91	3.01	3.11	2.97	3.03	3.13	3.24	3.07	3.14	3.24	3.35	2.97	3.03	3.13	3.24	3.07	3.14	3.24	3.35			
Amps	9.9</																																					

IDB		Airflow		Outdoor Ambient Temperature															115														
				65					75					85					95					105					115				
				Entering Indoor Wet Bulb Temperature																													
70	1050	MBh	34.8	35.3	36.3	-	34.5	35.0	36.0	-	33.6	34.1	35.1	-	32.0	32.5	33.5	-	30.1	30.6	31.6	-	28.4	28.8	29.9	-							
		S/T	0.65	0.57	0.42	-	0.65	0.57	0.43	-	0.68	0.60	0.45	-	1.00	0.62	0.47	-	1.00	0.64	0.50	-	1.00	0.70	0.55	-							
		ΔT	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	14	-	21	19	15	-							
		kW	2.23	2.23	2.23	-	2.50	2.50	2.50	-	2.80	2.80	2.80	-	3.13	3.12	3.12	-	3.49	3.49	3.48	-	3.91	3.91	3.91	-							
		Amps	8.9	8.9	8.9	-	10.1	10.1	10.1	-	11.5	11.5	11.5	-	13.0	13.0	12.9	-	14.6	14.6	14.6	-	16.6	16.6	16.6	-							
		HI PR	267	268	270	-	309	310	312	-	353	354	356	-	400	401	403	-	451	453	454	-	506	507	509	-							
LO PR	127	129	132	-	135	137	140	-	142	143	147	-	148	149	152	-	153	155	158	-	160	162	165	-									
70	1200	MBh	35.3	35.7	36.8	-	34.9	35.4	36.5	-	34.0	34.5	35.6	-	32.5	33.0	34.0	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-							
		S/T	0.71	0.63	0.48	-	0.72	0.64	0.49	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.71	0.56	-	1.00	1.00	0.62	-							
		ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	20	18	14	-							
		kW	2.25	2.25	2.24	-	2.52	2.51	2.51	-	2.82	2.81	2.81	-	3.14	3.14	3.13	-	3.50	3.50	3.50	-	3.93	3.93	3.92	-							
		Amps	8.9	8.9	8.9	-	10.2	10.2	10.1	-	11.6	11.5	11.5	-	13.0	13.0	13.0	-	14.7	14.7	14.7	-	16.6	16.6	16.6	-							
		HI PR	269	270	272	-	311	312	314	-	355	356	358	-	402	404	406	-	454	455	457	-	508	509	511	-							
LO PR	129	131	134	-	137	138	142	-	144	145	148	-	149	151	154	-	155	157	160	-	162	164	167	-									
70	1350	MBh	35.8	36.3	37.3	-	35.5	36.0	37.0	-	34.6	35.1	36.1	-	33.0	33.5	34.5	-	31.1	31.6	32.6	-	29.4	29.9	30.9	-							
		S/T	0.75	0.67	0.52	-	0.75	0.67	0.53	-	1.00	0.70	0.55	-	1.00	0.72	0.57	-	1.00	0.74	0.60	-	1.00	1.00	0.65	-							
		ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-							
		kW	2.26	2.26	2.25	-	2.53	2.53	2.52	-	2.83	2.83	2.82	-	3.15	3.15	3.15	-	3.51	3.51	3.51	-	3.94	3.94	3.93	-							
		Amps	9.0	9.0	9.0	-	10.2	10.2	10.2	-	11.6	11.6	11.6	-	13.1	13.1	13.1	-	14.8	14.7	14.7	-	16.7	16.7	16.7	-							
		HI PR	271	272	274	-	313	314	316	-	357	358	360	-	405	406	408	-	456	457	459	-	510	512	513	-							
LO PR	131	133	136	-	139	141	144	-	146	147	151	-	151	153	156	-	157	159	162	-	164	166	169	-									
75	1050	MBh	34.8	35.3	36.3	37.9	34.5	35.0	36.0	37.6	33.6	34.1	35.1	36.7	32.0	32.5	33.6	35.2	30.1	30.6	31.7	33.2	28.4	28.9	29.9	31.5							
		S/T	0.78	0.70	0.56	0.41	1.00	0.71	0.56	0.41	1.00	0.74	0.59	0.44	1.00	0.76	0.61	0.46	1.00	1.00	0.64	0.48	1.00	1.00	0.69	0.54							
		ΔT	24	22	19	15	24	22	19	15	24	22	19	15	24	22	19	15	24	22	18	15	25	23	19	16							
		kW	2.23	2.23	2.22	2.25	2.50	2.50	2.49	2.51	2.80	2.80	2.79	2.81	3.12	3.12	3.12	3.14	3.49	3.49	3.48	3.50	3.91	3.91	3.91	3.93							
		Amps	8.9	8.9	8.8	8.9	10.1	10.1	10.1	10.2	11.5	11.5	11.4	11.5	13.0	13.0	12.9	13.0	14.6	14.6	14.6	14.7	16.6	16.6	16.5	16.6							
		HI PR	267	268	270	275	309	310	312	317	353	354	356	361	400	402	403	408	452	453	455	459	506	507	509	514							
LO PR	127	129	132	138	135	137	140	145	142	143	147	152	148	149	152	158	153	155	158	163	160	162	165	170									
75	1200	MBh	35.3	35.8	36.8	38.4	35.0	35.5	36.5	38.1	34.1	34.5	35.6	37.2	32.5	33.0	34.0	35.6	30.6	31.1	32.1	33.7	28.8	29.3	30.4	32.0							
		S/T	0.85	0.77	0.62	0.47	1.00	0.77	0.63	0.48	1.00	0.80	0.66	0.50	1.00	0.82	0.68	0.52	1.00	1.00	0.70	0.55	1.00	1.00	0.75	0.60							
		ΔT	23	21	18	14	23	21	17	14	23	21	18	14	23	21	17	14	22	21	17	14	24	22	18	15							
		kW	2.25	2.24	2.24	2.26	2.51	2.51	2.51	2.53	2.81	2.81	2.81	2.83	3.14	3.13	3.13	3.15	3.50	3.50	3.49	3.52	3.93	3.92	3.92	3.94							
		Amps	8.9	8.9	8.9	9.0	10.2	10.2	10.1	10.2	11.5	11.5	11.5	11.6	13.0	13.0	13.1	13.1	14.7	14.7	14.7	14.8	16.6	16.6	16.6	16.7							
		HI PR	269	270	272	277	311	312	314	319	355	356	358	363	403	404	406	410	454	455	457	462	509	510	512	516							
LO PR	129	131	134	139	137	138	142	147	144	145	149	154	149	149	154	160	155	157	160	165	162	164	167	172									
75	1350	MBh	35.8	36.3	37.4	38.9	35.5	36.0	37.0	38.6	34.6	35.1	36.1	37.7	33.0	33.5	34.6	36.2	31.1	31.6	32.7	34.2	29.4	29.9	30.9	32.5							
		S/T	0.88	0.80	0.66	0.51	1.00	0.81	0.67	0.51	1.00	0.84	0.69	0.54	1.00	0.86	0.71	0.56	1.00	1.00	0.74	0.58	1.00	1.00	0.79	0.64							
		ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	23	21	17	14							
		kW	2.26	2.25	2.25	2.27	2.53	2.52	2.52	2.54	2.83	2.82	2.82	2.84	3.15	3.15	3.14	3.16	3.51	3.51	3.51	3.53	3.94	3.94	3.93	3.95							
		Amps	9.0	9.0	9.0	9.1	10.2	10.2	10.2	10.3	11.6	11.6	11.6	11.7	13.1	13.1	13.1	13.1	14.7	14.7	14.7	14.8	16.7	16.7	16.7	16.8							
		HI PR	271	272	274	279	313	315	316	321	357	359	360	365	405	406	408	413	456	457	459	464	511	512	514	518							
LO PR	131	133	136	141	139	141	144	149	146	147	151	156	151	151	153	156	162	157	159	162	167	164	166	169	174								

		Outdoor Ambient Temperature																													
		65					75					85					95					105					115				
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1050	MBh	35.0	35.5	36.5	38.1	34.7	35.2	36.2	37.8	33.8	34.3	35.3	36.9	32.2	32.7	33.7	35.3	30.3	30.8	31.8	33.4	28.6	29.0	30.1	31.7	28.6	29.0	30.1	31.7	
		S/T	1.00	0.84	0.69	0.54	1.00	0.84	0.70	0.55	1.00	0.87	0.73	0.57	1.00	1.00	0.75	0.59	1.00	1.00	0.77	0.62	1.00	1.00	0.82	0.67	1.00	1.00	0.82	0.67	
		ΔT	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	22	19	29	27	24	20	29	27	24	20	
		kW	2.23	2.23	2.23	2.25	2.50	2.50	2.49	2.52	2.80	2.80	2.79	2.82	3.13	3.12	3.12	3.14	3.49	3.49	3.48	3.50	3.91	3.91	3.91	3.93	3.91	3.91	3.91	3.93	
		Amps	8.9	8.9	8.9	8.9	10.1	10.1	10.1	10.2	11.5	11.5	11.5	11.6	13.0	13.0	12.9	13.0	14.6	14.6	14.6	14.7	16.6	16.6	16.6	16.5	16.6	16.6	16.5	16.6	
	1200	HI PR	267	269	270	275	309	311	312	317	353	355	357	361	401	402	404	409	452	453	455	460	507	508	510	514	507	508	510	514	
		LO PR	128	129	133	138	136	137	140	146	142	144	147	153	148	150	153	158	154	155	159	164	161	162	166	171	161	162	166	171	
		MBh	35.5	35.9	37.0	38.6	35.1	35.6	36.7	38.3	34.2	34.7	35.8	37.4	32.7	33.2	34.2	35.8	30.8	31.2	32.3	33.9	29.0	29.5	30.5	32.1	29.0	29.5	30.5	32.1	
		S/T	1.00	0.90	0.76	0.60	1.00	0.91	0.76	0.61	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.83	0.68	1.00	1.00	1.00	0.74	1.00	1.00	1.00	0.74	
		ΔT	27	25	22	18	27	25	22	18	27	25	22	18	27	25	22	18	27	25	21	18	28	26	22	19	28	26	22	19	
1350	kW	2.25	2.24	2.24	2.26	2.52	2.51	2.51	2.53	2.82	2.81	2.81	2.83	3.14	3.14	3.14	3.15	3.50	3.50	3.50	3.52	3.93	3.93	3.92	3.94	3.93	3.93	3.92	3.94		
	Amps	8.9	8.9	8.9	9.0	10.2	10.2	10.1	10.2	11.6	11.5	11.5	11.6	13.0	13.0	13.0	13.1	14.7	14.7	14.7	14.8	16.6	16.6	16.6	16.7	16.6	16.6	16.6	16.7		
	HI PR	270	271	273	277	312	313	315	319	356	357	359	363	403	404	406	411	454	456	457	462	509	510	512	517	509	510	512	517		
	LO PR	130	131	135	140	137	139	142	148	144	146	149	154	150	152	155	160	156	157	160	166	163	164	167	173	163	164	167	173		
	S/T	1.00	0.94	0.79	0.64	1.00	0.94	0.80	0.65	1.00	1.00	0.83	0.67	1.00	1.00	0.85	0.69	1.00	1.00	0.87	0.72	1.00	1.00	1.00	0.77	1.00	1.00	1.00	0.77		
85	1050	MBh	35.6	36.1	37.1	38.7	35.3	35.8	36.8	38.4	34.4	34.9	35.9	37.5	32.8	33.3	34.3	35.9	30.9	31.4	32.4	34.0	29.1	29.6	30.7	32.3	29.1	29.6	30.7	32.3	
		S/T	1.00	0.94	0.80	0.65	1.00	1.00	0.81	0.65	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.70	1.00	1.00	0.79	0.73	1.00	1.00	1.00	0.78	1.00	1.00	1.00	0.78	
		ΔT	32	30	26	23	32	30	26	23	32	30	27	23	32	30	26	23	31	29	26	22	32	31	27	24	32	31	27	24	
		kW	2.24	2.24	2.23	2.25	2.51	2.50	2.50	2.52	2.81	2.80	2.80	2.82	3.13	3.13	3.12	3.15	3.49	3.49	3.49	3.51	3.92	3.92	3.91	3.93	3.92	3.92	3.91	3.93	
		Amps	8.9	8.9	8.9	9.0	10.1	10.1	10.1	10.2	11.5	11.5	11.5	11.6	13.0	13.0	13.0	13.1	14.7	14.6	14.6	14.7	16.6	16.6	16.6	16.7	16.6	16.6	16.6	16.7	
	1200	HI PR	269	270	272	276	311	312	314	318	355	356	358	362	402	403	405	410	453	455	456	461	508	509	511	516	508	509	511	516	
		LO PR	130	131	135	140	138	139	142	148	144	146	149	155	150	152	155	160	156	157	160	166	163	164	168	173	163	164	168	173	
		MBh	36.0	36.5	37.6	39.2	35.7	36.2	37.3	38.8	34.8	35.3	36.3	37.9	33.3	33.7	34.8	36.4	31.3	31.8	32.9	34.5	29.6	30.1	31.1	32.7	29.6	30.1	31.1	32.7	
		S/T	1.00	1.00	0.86	0.71	1.00	1.00	0.87	0.72	1.00	1.00	0.90	0.75	1.00	1.00	0.92	0.77	1.00	1.00	0.79	0.73	1.00	1.00	1.00	0.84	1.00	1.00	1.00	0.84	
		ΔT	30	29	25	22	30	29	25	22	31	29	25	22	30	29	25	22	30	28	25	21	31	29	26	22	31	29	26	22	
1350	kW	2.25	2.25	2.25	2.27	2.52	2.52	2.51	2.53	2.82	2.82	2.81	2.83	3.15	3.14	3.14	3.16	3.51	3.51	3.50	3.52	3.93	3.93	3.93	3.95	3.93	3.93	3.93	3.95		
	Amps	9.0	9.0	8.9	9.0	10.2	10.2	10.2	10.3	11.6	11.6	11.5	11.6	13.1	13.0	13.0	13.1	14.7	14.7	14.7	14.8	16.7	16.7	16.6	16.7	16.7	16.7	16.6	16.7		
	HI PR	271	272	274	279	313	314	316	321	357	358	360	365	404	406	408	412	456	457	459	463	510	511	513	518	510	511	513	518		
	LO PR	132	133	136	142	139	141	144	150	146	148	151	156	152	153	157	162	158	159	162	168	165	166	169	175	165	166	169	175		
	S/T	1.00	1.00	0.90	0.75	1.00	1.00	0.91	0.75	1.00	1.00	0.93	0.78	1.00	1.00	1.00	0.80	1.00	1.00	0.83	0.73	1.00	1.00	1.00	0.88	1.00	1.00	1.00	0.88		
1350	ΔT	30	28	24	21	29	28	24	21	30	28	24	21	29	28	24	21	29	27	24	20	30	29	25	22	30	29	25	22		
	kW	2.26	2.26	2.26	2.28	2.53	2.53	2.53	2.55	2.83	2.83	2.83	2.85	3.16	3.15	3.15	3.17	3.52	3.52	3.51	3.53	3.95	3.95	3.94	3.96	3.95	3.94	3.94	3.96		
	Amps	9.0	9.0	9.0	9.1	10.3	10.2	10.2	10.3	11.6	11.6	11.6	11.7	13.1	13.1	13.1	13.2	14.8	14.8	14.7	14.8	16.7	16.7	16.7	16.8	16.7	16.7	16.7	16.8		
	HI PR	273	274	276	281	315	316	318	323	359	360	362	367	407	408	410	414	458	459	461	466	512	514	515	520	512	514	515	520		
	LO PR	134	135	139	144	141	143	146	152	148	150	153	158	154	156	159	164	160	161	164	170	167	168	171	177	167	168	171	177		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI (TVA) conditions.

Amps: Unit amps (comp. + evaporator + condenser fan motors)

kW = Total system power

IDB		AIRFLOW		Outdoor Ambient Temperature												105												115											
				65						75						85						95						105						115					
				Entering Indoor Wet Bulb Temperature																																			
70	1717	MBh	45.9	47.5	52.1	-	44.8	46.4	50.9	-	43.7	45.3	49.7	-	42.7	44.2	48.5	-	40.5	42.0	46.0	-	37.6	38.9	42.6	-	37.6	38.9	42.6	-	37.6	38.9	42.6	-					
		S/T	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.73	0.51	-	0.91	0.76	0.53	-	0.92	0.77	0.53	-	0.92	0.77	0.53	-	0.92	0.77	0.53	-					
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	18	16	12	-	18	16	12	-					
		kW	3.18	3.25	3.35	-	3.42	3.49	3.60	-	3.63	3.70	3.82	-	3.81	3.89	4.01	-	3.96	4.05	4.18	-	4.10	4.19	4.32	-	4.10	4.19	4.32	-	4.10	4.19	4.32	-					
		Amps	15.3	15.5	15.9	-	16.2	16.5	16.9	-	17.3	17.6	18.0	-	18.2	18.5	19.0	-	19.1	19.5	20.0	-	20.0	20.4	21.0	-	20.0	20.4	21.0	-	20.0	20.4	21.0	-					
70	1529	Hi PR	254	273	288	-	285	306	324	-	324	348	368	-	369	397	419	-	415	446	471	-	458	493	521	-	458	493	521	-	458	493	521	-					
		LO PR	112	119	130	-	118	126	137	-	123	131	142	-	129	137	150	-	135	144	157	-	140	149	162	-	140	149	162	-	140	149	162	-					
		MBh	44.5	46.2	50.6	-	43.5	45.1	49.4	-	42.5	44.0	48.2	-	41.4	42.9	47.1	-	39.4	40.8	44.7	-	36.5	37.8	41.4	-	36.5	37.8	41.4	-	36.5	37.8	41.4	-					
		S/T	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.83	0.70	0.48	-	0.87	0.72	0.50	-	0.87	0.73	0.51	-	0.87	0.73	0.51	-	0.87	0.73	0.51	-					
		ΔT	20	18	13	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	13	-	19	17	13	-	19	17	13	-	19	17	13	-					
70	1341	kW	3.16	3.22	3.32	-	3.39	3.46	3.57	-	3.60	3.67	3.79	-	3.78	3.86	3.98	-	3.93	4.02	4.15	-	4.07	4.15	4.29	-	4.07	4.15	4.29	-	4.07	4.15	4.29	-					
		Amps	15.2	15.4	15.8	-	16.1	16.4	16.8	-	17.1	17.5	17.9	-	18.0	18.4	18.9	-	19.0	19.3	19.8	-	19.9	20.2	20.8	-	19.9	20.2	20.8	-	19.9	20.2	20.8	-					
		Hi PR	251	270	285	-	282	303	320	-	321	345	364	-	365	393	415	-	411	442	467	-	454	488	516	-	454	488	516	-	454	488	516	-					
		LO PR	111	118	128	-	117	124	136	-	121	129	141	-	128	136	148	-	134	142	155	-	138	147	161	-	138	147	161	-	138	147	161	-					
		MBh	41.1	42.6	46.7	-	40.2	41.6	45.6	-	39.2	40.6	44.5	-	38.2	39.6	43.4	-	36.3	37.7	41.3	-	33.7	34.9	38.2	-	33.7	34.9	38.2	-	33.7	34.9	38.2	-					
75	1717	S/T	0.73	0.61	0.42	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.84	0.70	0.48	-	0.84	0.70	0.49	-	0.84	0.70	0.49	-	0.84	0.70	0.49	-					
		ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	19	17	13	-	19	17	13	-	19	17	13	-					
		kW	3.09	3.15	3.25	-	3.31	3.38	3.49	-	3.51	3.59	3.70	-	3.69	3.77	3.89	-	3.84	3.92	4.04	-	3.97	4.05	4.18	-	3.97	4.05	4.18	-	3.97	4.05	4.18	-					
		Amps	14.9	15.1	15.5	-	15.7	16.0	16.4	-	16.8	17.1	17.5	-	17.7	18.0	18.5	-	18.5	18.9	19.4	-	19.4	19.8	20.3	-	19.4	19.8	20.3	-	19.4	19.8	20.3	-					
		Hi PR	244	262	277	-	273	294	311	-	311	335	353	-	354	381	402	-	398	429	453	-	440	474	500	-	440	474	500	-	440	474	500	-					
75	1529	LO PR	107	114	125	-	113	121	132	-	118	125	137	-	124	132	144	-	130	138	151	-	134	143	156	-	134	143	156	-	134	143	156	-					
		MBh	46.7	48.0	52.0	55.8	45.6	46.9	50.8	54.5	44.5	45.8	49.6	53.2	43.4	44.7	48.4	51.9	41.2	42.4	45.9	49.3	38.2	39.3	42.6	45.7	38.2	39.3	42.6	45.7	38.2	39.3	42.6	45.7					
		S/T	0.91	0.81	0.61	0.40	0.94	0.84	0.64	0.41	0.96	0.86	0.65	0.42	0.99	0.89	0.67	0.43	1.00	0.92	0.70	0.45	1.00	0.93	0.70	0.45	1.00	0.93	0.70	0.45	1.00	0.93	0.70	0.45					
		ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	22	21	17	12	20	20	16	11	20	20	16	11	20	20	16	11					
		kW	3.21	3.27	3.37	3.48	3.45	3.52	3.63	3.74	3.66	3.73	3.85	3.97	3.84	3.92	4.05	4.18	4.00	4.08	4.21	4.35	4.13	4.22	4.36	4.50	4.13	4.22	4.36	4.50	4.13	4.22	4.36	4.50					
75	1341	Amps	15.4	15.6	16.0	16.5	16.3	16.6	17.0	17.5	17.4	17.7	18.2	18.7	18.3	18.7	19.2	19.7	19.2	19.6	20.1	20.8	20.2	20.6	21.1	21.8	20.2	20.6	21.1	21.8	20.2	20.6	21.1	21.8					
		Hi PR	256	276	291	304	288	310	327	341	327	352	372	388	373	401	423	442	419	451	476	497	463	498	526	549	463	498	526	549	463	498	526	549					
		LO PR	113	120	131	140	119	127	138	147	124	132	144	153	130	138	151	161	136	145	158	169	141	150	164	175	141	150	164	175	141	150	164	175					
		MBh	45.3	46.6	50.5	54.2	44.2	45.6	49.3	52.9	43.2	44.5	48.1	51.7	42.1	43.4	47.0	50.4	40.0	41.2	44.6	47.9	37.1	38.2	41.3	44.3	37.1	38.2	41.3	44.3	37.1	38.2	41.3	44.3					
		S/T	0.87	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.67	0.43	0.99	0.89	0.67	0.43	0.99	0.89	0.67	0.43	0.99	0.89	0.67	0.43					
75	1529	ΔT	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	13	24	22	18	12	22	20	17	12	22	20	17	12	22	20	17	12					
		kW	3.19	3.25	3.35	3.45	3.42	3.49	3.60	3.71	3.63	3.70	3.82	3.94	3.81	3.89	4.01	4.14	3.97	4.05	4.18	4.32	4.10	4.19	4.32	4.47	4.10	4.19	4.32	4.47	4.10	4.19	4.32	4.47					
		Amps	15.3	15.5	15.9	16.4	16.2	16.5	16.9	17.4	17.3	17.6	18.0	18.6	18.2	18.5	19.0	19.6	19.1	19.5	20.0	20.6	20.0	20.4	21.0	21.6	20.0	20.4	21.0	21.6	20.0	20.4	21.0	21.6					
		Hi PR	254	273	288	301	285	306	324	338	324	349	368	384	369	397	419	437	415	447	472	492	459	493	521	543	459	493	521	543	459	493	521	543					
		LO PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	159	135	144	157	167	140	149	162	173	140	149	162	173	140	149	162	173					
75	1341	MBh	41.8	43.0	46.6	50.0	40.8	42.0	45.5	48.8	39.9	41.0	44.4	47.7	38.9	40.0	43.3	46.5	36.9	38.0	41.2	44.2	34.2	35.2	38.1	40.9	34.2	35.2	38.1	40.9	34.2	35.2	38.1	40.9					
		S/T	0.83	0.75	0.56	0.36	0.86	0.77	0.59	0.38	0.89	0.79	0.60	0.39	0.91	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42					
		ΔT	24	22	18	12	24	22	18	13	24	22	18	13	24	22	18	13	24	22	18	13	22	21	17	12	22	21	17	12	22	21	17	12					
		kW	3.11	3.18	3.27	3.37	3.34	3.41	3.51	3.62	3.54	3.62	3.73	3.85	3.72	3.80	3.92	4.04	3.87	3.95	4.08	4.21	4.00	4.09	4.22	4.35	4.00	4.09	4.22	4.35	4.00	4.09	4.22	4.35					
		Amps	15.0	15.2	15.6	16.0	15.9	16.1	16.5	17.0	16.9	17.2	17.6	18.2	17.8	18.1	18.6	19.2	18.7	19.0	19.5	20.1	19.6	19.9	20.5	21.1	19.6	19.9	20.5	21.1	19.6	19.9	20.5	21.1					
75	1341	Hi PR	246	265	280	292	276	297	314	327	314	338																											

		Outdoor Ambient Temperature																													
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75
80	MBh	47.5	48.5	51.8	55.4		46.4	47.4	50.6	54.1		45.3	46.3	49.4	52.8		44.2	45.1	48.2	51.5		42.0	42.9	45.8	49.0		38.9	39.7	42.4	45.4	
	S/T	1.00	0.93	0.76	0.57		1.00	0.97	0.79	0.59		1.00	1.00	0.81	0.60		1.00	1.00	0.83	0.62		1.00	1.00	0.86	0.65		1.00	1.00	0.87	0.65	
	ΔT	25	24	21	17		25	25	21	17		24	25	21	17		24	24	22	17		22	23	21	17		21	21	20	16	
	kW	3.23	3.30	3.40	3.51		3.47	3.55	3.66	3.77		3.68	3.76	3.88	4.01		3.87	3.95	4.08	4.21		4.03	4.12	4.25	4.39		4.17	4.26	4.40	4.54	
	Amps	15.5	15.8	16.1	16.6		16.4	16.7	17.1	17.6		17.5	17.8	18.3	18.8		18.4	18.8	19.3	19.9		19.4	19.8	20.3	20.9		20.3	20.7	21.3	21.9	
	Hi PR	259	279	294	307		291	313	330	344		330	356	375	392		376	405	428	446		423	456	481	502		468	503	532	554	
	LO PR	114	121	132	141		120	128	140	149		125	133	145	155		131	140	153	163		138	147	160	170		143	152	166	176	
	MBh	46.1	47.1	50.3	53.8		45.0	46.0	49.2	52.5		44.0	44.9	48.0	51.3		42.9	43.8	46.8	50.0		40.7	41.6	44.5	47.5		37.7	38.6	41.2	44.0	
	S/T	0.95	0.89	0.72	0.54		0.98	0.92	0.75	0.56		1.00	0.95	0.77	0.58		1.00	0.98	0.79	0.59		1.00	1.00	0.82	0.62		1.00	1.00	0.83	0.62	
	ΔT	26	25	22	18		27	26	22	18		26	26	22	18		26	26	22	18		24	25	22	18		23	23	21	16	
1341	kW	3.21	3.28	3.37	3.48		3.45	3.52	3.63	3.74		3.66	3.73	3.85	3.97		3.84	3.92	4.05	4.18		4.00	4.08	4.21	4.35		4.13	4.22	4.36	4.50	
	Amps	15.4	15.6	16.0	16.5		16.3	16.6	17.0	17.5		17.4	17.7	18.2	18.7		18.3	18.7	19.2	19.7		19.2	19.6	20.1	20.8		20.2	20.6	21.1	21.8	
	Hi PR	256	276	291	304		288	310	327	341		327	352	372	388		373	401	423	442		419	451	476	497		463	498	526	549	
	LO PR	113	120	131	140		119	127	138	148		124	132	144	153		130	138	151	161		136	145	158	169		141	150	164	175	
	MBh	42.6	43.5	46.5	49.7		41.6	42.5	45.4	48.5		40.6	41.5	44.3	47.3		39.6	40.4	43.2	46.2		37.6	38.4	41.1	43.9		34.8	35.6	38.0	40.6	
	S/T	0.91	0.86	0.70	0.52		0.95	0.89	0.72	0.54		0.97	0.91	0.74	0.55		1.00	0.94	0.77	0.57		1.04	0.98	0.80	0.59		1.05	0.98	0.80	0.60	
	ΔT	27	26	22	18		27	26	23	18		27	26	23	18		27	26	23	18		27	26	22	18		25	24	21	17	
	kW	3.14	3.20	3.30	3.40		3.37	3.44	3.54	3.65		3.57	3.64	3.76	3.88		3.75	3.83	3.95	4.08		3.90	3.98	4.11	4.25		4.03	4.12	4.25	4.39	
	Amps	15.1	15.3	15.7	16.1		16.0	16.3	16.7	17.1		17.0	17.3	17.8	18.3		17.9	18.3	18.7	19.3		18.8	19.2	19.7	20.3		19.7	20.1	20.6	21.3	
	Hi PR	249	268	283	295		279	300	317	331		317	341	361	376		361	389	411	428		407	438	462	482		449	483	510	532	
LO PR	109	116	127	135		116	123	134	143		120	128	140	149		126	134	147	156		132	141	154	164		137	146	159	169		
85	MBh	48.3	49.2	51.6	55.0		47.2	48.1	50.4	53.7		46.1	47.0	49.2	52.5		44.9	45.8	48.0	51.2		42.7	43.5	45.6	48.6		39.5	40.3	42.2	45.0	
	S/T	1.00	1.00	0.91	0.74		1.00	1.00	0.94	0.76		1.00	1.00	0.97	0.78		1.00	1.00	0.95	0.77		1.00	1.00	0.99	0.84		1.00	1.00	0.99	0.85	
	ΔT	26	26	25	22		25	26	25	22		25	25	25	22		24	25	26	22		23	23	24	22		21	22	23	20	
	kW	3.26	3.33	3.43	3.53		3.50	3.57	3.68	3.80		3.71	3.79	3.91	4.04		3.90	3.99	4.11	4.25		4.06	4.15	4.28	4.43		4.20	4.29	4.43	4.58	
	Amps	15.6	15.9	16.3	16.7		16.5	16.8	17.3	17.8		17.6	18.0	18.4	19.0		18.6	18.9	19.4	20.0		19.5	19.9	20.4	21.1		20.5	20.9	21.4	22.1	
	Hi PR	261	281	297	310		293	316	333	348		334	359	379	396		380	409	432	450		428	460	486	507		472	508	537	560	
	LO PR	115	122	134	142		122	129	141	150		126	135	147	156		133	141	154	164		139	148	162	172		144	153	167	178	
	MBh	46.9	47.8	50.1	53.4		45.8	46.7	48.9	52.2		44.7	45.6	47.7	50.9		43.6	44.5	46.6	49.7		41.5	42.3	44.3	47.2		38.4	39.1	41.0	43.7	
	S/T	0.99	0.96	0.87	0.70		1.00	0.99	0.90	0.73		1.00	1.00	0.92	0.75		1.00	1.00	0.95	0.77		1.00	1.00	0.99	0.80		1.00	1.00	0.99	0.81	
	ΔT	28	28	26	23		28	28	26	23		27	27	26	23		26	27	27	23		25	25	26	23		23	24	25	21	
1341	kW	3.23	3.30	3.40	3.51		3.47	3.55	3.66	3.77		3.68	3.76	3.88	4.01		3.87	3.95	4.08	4.21		4.03	4.12	4.25	4.39		4.17	4.26	4.40	4.54	
	Amps	15.5	15.8	16.1	16.6		16.4	16.7	17.1	17.6		17.5	17.8	18.3	18.8		18.4	18.8	19.3	19.9		19.4	19.8	20.3	20.9		20.3	20.7	21.3	21.9	
	Hi PR	259	279	294	307		291	313	330	344		330	356	375	392		376	405	428	446		423	456	481	502		468	503	532	554	
	LO PR	114	121	132	141		120	128	140	149		125	133	145	155		131	140	153	163		138	147	160	170		143	152	166	176	
	MBh	43.3	44.1	46.2	49.3		42.3	43.1	45.1	48.2		41.3	42.1	44.1	47.0		40.3	41.1	43.0	45.9		38.3	39.0	40.8	43.6		35.4	36.1	37.8	40.4	
	S/T	0.96	0.93	0.84	0.68		0.99	0.96	0.87	0.70		1.00	0.98	0.89	0.72		1.00	1.00	0.92	0.74		1.00	1.00	0.95	0.77		1.00	1.00	0.96	0.78	
	ΔT	28	28	26	23		29	28	27	23		28	28	27	23		28	28	27	23		26	27	27	23		23	24	25	22	
	kW	3.16	3.22	3.32	3.42		3.39	3.46	3.57	3.68		3.60	3.67	3.79	3.91		3.78	3.86	3.98	4.11		3.93	4.02	4.14	4.28		4.06	4.15	4.29	4.43	
	Amps	15.2	15.4	15.8	16.3		16.1	16.4	16.8	17.3		17.1	17.4	17.9	18.4		18.0	18.4	18.9	19.4		18.9	19.3	19.8	20.4		19.8	20.2	20.8	21.4	
	Hi PR	251	270	285	298		282	303	320	334		320	345	364	380		365	393	415	433		411	442	467	487		454	488	516	538	
LO PR	111	118	128	137		117	124	136	145		121	129	141	150		128	136	148	158		134	142	155	165		138	147	161	171		

IDB: Entering Indoor Dry Bulb Temperature
 High & low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI (TVA) conditions

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

kW = Total system power

IDB		AIRFLOW		Outdoor Ambient Temperature												105												115											
				65						75						85						95						105						115					
				59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70		MBh	47.5	48.2	49.6	-	47.1	47.8	49.2	-	45.9	46.5	47.9	-	43.7	44.4	45.8	-	41.1	41.8	43.2	-	38.8	39.4	40.8	-	38.8	39.4	40.8	-	38.8	39.4	40.8	-					
		S/T	0.66	0.58	0.44	-	0.66	0.58	0.44	-	0.69	0.61	0.47	-	1.00	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.71	0.56	-	1.00	0.71	0.56	-	1.00	0.71	0.56	-					
		ΔT	20	18	14	-	20	18	14	-	20	18	15	-	20	18	14	-	20	18	14	-	21	19	15	-	21	19	15	-	21	19	15	-					
	1400	kW	3.05	3.04	3.04	-	3.41	3.41	3.40	-	3.82	3.81	3.81	-	4.26	4.25	4.25	-	4.75	4.75	4.74	-	5.33	5.32	5.32	-	5.33	5.32	5.32	-	5.33	5.32	5.32	-					
		Amps	11.7	11.7	11.6	-	13.3	13.3	13.3	-	15.2	15.2	15.2	-	17.2	17.2	17.2	-	19.5	19.4	19.4	-	22.1	22.1	22.1	-	22.1	22.1	22.1	-	22.1	22.1	22.1	-					
		Hi PR	267	268	270	-	309	310	312	-	353	354	356	-	400	402	403	-	452	453	455	-	506	507	509	-	506	507	509	-	506	507	509	-					
75		Lo PR	125	127	130	-	133	134	137	-	139	141	144	-	145	147	150	-	150	152	155	-	157	159	162	-	157	159	162	-	157	159	162	-					
		MBh	47.9	48.6	50.0	-	47.5	48.2	49.6	-	46.3	46.9	48.4	-	44.1	44.8	46.2	-	41.5	42.2	43.6	-	39.2	39.8	41.3	-	39.2	39.8	41.3	-	39.2	39.8	41.3	-					
		S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.73	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-					
	1525	ΔT	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	19	17	13	-	20	18	15	-	20	18	15	-	20	18	15	-					
		kW	3.06	3.06	3.05	-	3.42	3.42	3.41	-	3.83	3.83	3.82	-	4.27	4.27	4.26	-	4.76	4.76	4.75	-	5.34	5.34	5.33	-	5.34	5.34	5.33	-	5.34	5.34	5.33	-					
		Amps	11.7	11.7	11.7	-	13.4	13.4	13.3	-	15.3	15.2	15.2	-	17.3	17.3	17.2	-	19.5	19.5	19.5	-	22.2	22.1	22.1	-	22.2	22.1	22.1	-	22.2	22.1	22.1	-					
1800		Hi PR	268	270	272	-	310	312	314	-	355	356	358	-	402	403	405	-	453	454	456	-	508	509	511	-	508	509	511	-	508	509	511	-					
		Lo PR	126	128	131	-	134	135	139	-	141	142	145	-	146	148	151	-	152	153	156	-	159	160	163	-	159	160	163	-	159	160	163	-					
		MBh	49.1	49.7	51.1	-	48.6	49.3	50.7	-	47.4	48.1	49.5	-	45.3	45.9	47.4	-	42.7	43.3	44.8	-	40.3	41.0	42.4	-	40.3	41.0	42.4	-	40.3	41.0	42.4	-					
		S/T	0.74	0.66	0.52	-	0.74	0.66	0.52	-	1.00	0.69	0.55	-	1.00	0.71	0.57	-	1.00	0.73	0.59	-	1.00	0.79	0.65	-	1.00	0.79	0.65	-	1.00	0.79	0.65	-					
	1800	ΔT	18	16	12	-	18	16	12	-	18	16	13	-	18	16	12	-	17	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-					
		kW	3.08	3.08	3.07	-	3.44	3.44	3.44	-	3.85	3.85	3.84	-	4.29	4.29	4.28	-	4.78	4.78	4.77	-	5.36	5.36	5.35	-	5.36	5.36	5.35	-	5.36	5.36	5.35	-					
1400		Amps	11.8	11.8	11.8	-	13.5	13.5	13.4	-	15.4	15.3	15.3	-	17.4	17.4	17.3	-	19.6	19.6	19.6	-	22.3	22.2	22.2	-	22.3	22.2	22.2	-	22.3	22.2	22.2	-					
		Hi PR	272	273	275	-	314	315	317	-	358	359	361	-	405	406	408	-	456	457	459	-	511	512	514	-	511	512	514	-	511	512	514	-					
		Lo PR	129	131	134	-	137	139	142	-	144	145	148	-	149	151	154	-	155	156	159	-	162	163	166	-	162	163	166	-	162	163	166	-					
		MBh	49.1	49.7	51.1	-	48.6	49.3	50.7	-	47.4	48.1	49.5	-	45.3	45.9	47.4	-	42.7	43.3	44.8	-	40.3	41.0	42.4	-	40.3	41.0	42.4	-	40.3	41.0	42.4	-					
		S/T	0.74	0.66	0.52	-	0.74	0.66	0.52	-	1.00	0.69	0.55	-	1.00	0.71	0.57	-	1.00	0.73	0.59	-	1.00	0.79	0.65	-	1.00	0.79	0.65	-	1.00	0.79	0.65	-					
		ΔT	18	16	12	-	18	16	12	-	18	16	13	-	18	16	12	-	17	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-					
75		kW	3.08	3.08	3.07	-	3.44	3.44	3.44	-	3.85	3.85	3.84	-	4.29	4.29	4.28	-	4.78	4.78	4.77	-	5.36	5.36	5.35	-	5.36	5.36	5.35	-	5.36	5.36	5.35	-					
	1400	Amps	11.7	11.6	11.6	11.7	13.3	13.3	13.3	13.4	15.2	15.2	15.1	15.3	17.2	17.2	17.2	17.3	19.4	19.4	19.4	19.5	22.1	22.1	22.0	22.2	19.4	19.4	19.4	19.5	22.1	22.1	22.0	22.2					
		Hi PR	267	268	270	275	309	310	312	317	353	354	356	361	401	402	404	408	452	453	455	459	506	507	509	514	452	453	455	459	506	507	509	514					
		Lo PR	125	127	130	135	133	134	137	143	139	141	144	149	145	147	150	155	151	152	155	161	157	159	162	167	151	152	155	161	157	159	162	167					
		MBh	48.0	48.6	50.0	52.2	47.5	48.2	49.6	51.8	46.3	47.0	48.4	50.5	44.2	44.8	46.3	48.4	41.6	42.2	43.7	45.8	39.2	39.9	41.3	43.4	41.6	42.2	43.7	45.8	39.2	39.9	41.3	43.4					
		S/T	0.83	0.75	0.61	0.46	1.00	0.75	0.61	0.46	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	1.00	0.74	0.59	1.00	0.82	0.68	0.53	1.00	1.00	0.74	0.59					
1525		ΔT	23	21	18	14	23	21	18	14	23	22	18	14	23	21	18	14	23	21	18	14	24	22	19	15	24	22	19	15	24	22	19	15					
	1400	kW	3.06	3.05	3.05	3.07	3.42	3.42	3.41	3.44	3.83	3.82	3.82	3.85	4.27	4.26	4.26	4.29	4.76	4.76	4.75	4.78	5.34	5.33	5.33	5.35	4.76	4.76	4.75	4.78	5.34	5.33	5.33	5.35					
		Amps	11.7	11.7	11.7	11.8	13.4	13.4	13.3	13.5	15.2	15.2	15.2	15.3	17.3	17.2	17.2	17.3	19.5	19.5	19.5	19.6	22.1	22.1	22.1	22.2	19.5	19.5	19.5	19.6	22.1	22.1	22.1	22.2					
		Hi PR	269	270	272	276	311	312	314	318	355	356	358	362	402	403	405	410	453	454	456	461	508	509	511	515	453	454	456	461	508	509	511	515					
		Lo PR	126	128	131	136	134	136	139	144	141	142	145	151	146	148	151	156	152	153	156	162	159	160	163	169	152	153	156	162	159	160	163	169					
		MBh	49.1	49.7	51.2	53.3	48.7	49.3	50.7	52.9	47.4	48.1	49.5	51.7	45.3	46.0	47.4	49.5	42.7	43.4	44.8	46.9	40.3	41.0	42.4	44.6	42.7	43.4	44.8	46.9	40.3	41.0	42.4	44.6					
1800		S/T	0.87	0.79	0.65	0.50	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	0.84	0.70	0.55	1.00	1.00	0.73	0.58	1.00	1.00	0.78	0.63	1.00	0.82	0.68	0.53	1.00	1.00	0.78	0.63					
		ΔT	22	20	17	13	22	20	16	13	22	20	17	13	22	20	16	13	22	20	16	13	23	21	17	14	22	20	16	13	23	21	17	14					
	1400	kW	3.08	3.08	3.07	3.10	3.44	3.44	3.43	3.46	3.85	3.85	3.84	3.87	4.29	4.29	4.28	4.31	4.78	4.78	4.77	4.80	5.36	5.36	5.35	5.38	4.78	4.78	4.77	4.80									

		Outdoor Ambient Temperature																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
		65						75						85						95						105						115																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	199	203	207	211	215	219	223	227	231	235	239	243	247	251	255	259	263	267	271	275	279	283	287	291	295	299	303	307	311	315	319	323	327	331	335	339	343	347	351	355	359	363	367	371	375	379	383	387	391	395	399	403	407	411	415	419	423	427	431	435	439	443	447	451	455	459	463	467	471	475	479	483	487	491	495	499	503	507	511	515	519	523	527	531	535	539	543	547	551	555	559	563	567	571	575	579	583	587	591	595	599	603	607	611	615	619	623	627	631	635	639	643	647	651	655	659	663	667	671	675	679	683	687	691	695	699	703	707	711	715	719	723	727	731	735	739	743	747	751	755	759	763	767	771	775	779	783	787	791	795	799	803	807	811	815	819	823	827	831	835	839	843	847	851	855	859	863	867	871	875	879	883	887	891	895	899	903	907	911	915	919	923	927	931	935	939	943	947	951	955	959	963	967	971	975	979	983	987	991	995	999	1003	1007	1011	1015	1019	1023	1027	1031	1035	1039	1043	1047	1051	1055	1059	1063	1067	1071	1075	1079	1083	1087	1091	1095	1099	1103	1107	1111	1115	1119	1123	1127	1131	1135	1139	1143	1147	1151	1155	1159	1163	1167	1171	1175	1179	1183	1187	1191	1195	1199	1203	1207	1211	1215	1219	1223	1227	1231	1235	1239	1243	1247	1251	1255	1259	1263	1267	1271	1275	1279	1283	1287	1291	1295	1299	1303	1307	1311	1315	1319	1323	1327	1331	1335	1339	1343	1347	1351	1355	1359	1363	1367	1371	1375	1379	1383	1387	1391	1395	1399	1403	1407	1411	1415	1419	1423	1427	1431	1435	1439	1443	1447	1451	1455	1459	1463	1467	1471	1475	1479	1483	1487	1491	1495	1499	1503	1507	1511	1515	1519	1523	1527	1531	1535	1539	1543	1547	1551	1555	1559	1563	1567	1571	1575	1579	1583	1587	1591	1595	1599	1603	1607	1611	1615	1619	1623	1627	1631	1635	1639	1643	1647	1651	1655	1659	1663	1667	1671	1675	1679	1683	1687	1691	1695	1699	1703	1707	1711	1715	1719	1723	1727	1731	1735	1739	1743	1747	1751	1755	1759	1763	1767	1771	1775	1779	1783	1787	1791	1795	1799	1803	1807	1811	1815	1819	1823	1827	1831	1835	1839	1843	1847	1851	1855	1859	1863	1867	1871	1875	1879	1883	1887	1891	1895	1899	1903	1907	1911	1915	1919	1923	1927	1931	1935	1939	1943	1947	1951	1955	1959	1963	1967	1971	1975	1979	1983	1987	1991	1995	1999	2003	2007	2011	2015	2019	2023	2027	2031	2035	2039	2043	2047	2051	2055	2059	2063	2067	2071	2075	2079	2083	2087	2091	2095	2099	2103	2107	2111	2115	2119	2123	2127	2131	2135	2139	2143	2147	2151	2155	2159	2163	2167	2171	2175	2179	2183	2187	2191	2195	2199	2203	2207	2211	2215	2219	2223	2227	2231	2235	2239	2243	2247	2251	2255	2259	2263	2267	2271	2275	2279	2283	2287	2291	2295	2299	2303	2307	2311	2315	2319	2323	2327	2331	2335	2339	2343	2347	2351	2355	2359	2363	2367	2371	2375	2379	2383	2387	2391	2395	2399	2403	2407	2411	2415	2419	2423	2427	2431	2435	2439	2443	2447	2451	2455	2459	2463	2467	2471	2475	2479	2483	2487	2491	2495	2499	2503	2507	2511	2515	2519	2523	2527	2531	2535	2539	2543	2547	2551	2555	2559	2563	2567	2571	2575	2579	2583	2587	2591	2595	2599	2603	2607	2611	2615	2619	2623	2627	2631	2635	2639	2643	2647	2651	2655	2659	2663	2667	2671	2675	2679	2683	2687	2691	2695	2699	2703	2707	2711	2715	2719	2723	2727	2731	2735	2739	2743	2747	2751	2755	2759	2763	2767	2771	2775	2779	2783	2787	2791	2795	2799	2803	2807	2811	2815	2819	2823	2827	2831	2835	2839	2843	2847	2851	2855	2859	2863	2867	2871	2875	2879	2883	2887	2891	2895	2899	2903	2907	2911	2915	2919	2923	2927	2931	2935	2939	2943	2947	2951	2955	2959	2963	2967	2971	2975	2979	2983	2987	2991	2995	2999	3003	3007	3011	3015	3019	3023	3027	3031	3035	3039	3043	3047	3051	3055	3059	3063	3067	3071	3075	3079	3083	3087	3091	3095	3099	3103	3107	3111	3115	3119	3123	3127	3131	3135	3139	3143	3147	3151	3155	3159	3163	3167	3171	3175	3179	3183	3187	3191	3195	3199	3203	3207	3211	3215	3219	3223	3227	3231	3235	3239	3243	3247	3251	3255	3259	3263	3267	3271	3275	3279	3283	3287	3291	3295	3299	3303	3307	3311	3315	3319	3323	3327	3331	3335	3339	3343	3347	3351	3355	3359	3363	3367	3371	3375	3379	3383	3387	3391	3395	3399	3403	3407	3411	3415	3419	3423	3427	3431	3435	3439	3443	3447	3451	3455	3459	3463	3467	3471	3475	3479	3483	3487	3491	3495	3499	3503	3507	3511	3515	3519	3523	3527	3531	3535	3539	3543	3547	3551	3555	3559	3563	3567	3571	3575	3579	3583	3587	3591	3595	3599	3603	3607	3611	3615	3619	3623	3627	3631	3635	3639	3643	3647	3651	3655	3659	3663	3667	3671	3675	3679	3683	3687	3691	3695	3699	3703	3707	3711	3715	3719	3723	3727	3731	3735	3739	3743	3747	3751	3755	3759	3763	3767	3771	3775	3779	3783	3787	3791	3795	3799	3803	3807	3811	3815	3819	3823	3827	3831	3835	3839	3843	3847	3851	3855	3859	3863	3867	3871	3875	3879	3883	3887	3891	3895	3899	3903	3907	3911	3915	3919	3923	3927	3931	3935	3939	3943	3947	3951	3955	3959	3963	3967	3971	3975	3979	3983	3987	3991	3995	3999	4003	4007	4011	4015	4019	4023	4027	4031	4035	4039	4043	4047	4051	4055	4059	4063	4067	4071	4075	4079	4083	4087	4091	4095	4099	4103	4107	4111	4115	4119	4123	4127	4131	4135	4139	4143	4147	4151	4155	4159	4163	4167	4171	4175	4179	4183	4187	4191	4195	4199	4203	4207	4211	4215	4219	4223	4227	4231	4235	4239	4243	4247	4251	4255	4259	4263	4267	4271	4275	4279	4283	4287	4291	4295	4299	4303	4307	4311	4315	4319	4323	4327	4331	4335	4339	4343	4347	4351	4355	4359	4363	4367	4371	4375	4379	4383	4387	4391	4395	4399	4403	4407	4411	4415	4419	4423	4427	4431	4435	4439	4443	4447	4451	4455	4459	4463	4467	4471	4475	4479	4483	4487	4491	4495	4499	4503	4507	4511	4515	4519	4523	4527	4531	4535	4539	4543	4547	4551	4555	4559	4563	4567	4571	4575	4579	4583	4587	4591	4595	4599	4603	4607	4611	4615	4619	4623	4627	4631	4635	4639	4643	4647	4651	4655	4659	4663	4667	4671	4675	4679	4683	4687	4691	4695	4699	4703	4707	4711	4715	4719	4723	4727	4731	4735	4739	4743	4747	4751	4755	4759	4763	4767	4771	4775	4779	4783	4787	4791	4795	4799	4803	4807	4811	4815	4819	4823	4827	4831	4835	4839	4843	4847	4851	4855	4859	4863	4867	4871	4875	4879	4883	4887	4891	4895	4899	4903	4907	4911	4915	4919	4923	4927	4931	4935	4939	4943	4947	4951	4955	4959	4963	4967	4971	4975	4979	4983	4987	4991	4995	4999	5003	5007	5011	5015	5019	5023	5027	5031	5035	5039	5043	5047	5051	5055	5059	5063	5067	5071	5075	5079	5083	5087	5091	5095	5099	5103	5107	5111	5115	5119	5123	5127	5131	5135	5139	5143	5147	5151	5155	5159	5163	5167	5171	5175	5179	5183	5187	5191	5195	5199	5203	5207	5211	5215	5219	5223	5227	5231	5235	5239	5243	5247	5251	5255	5259	5263	5267	5271	5275	5279	5283	5287	5291	5295	5299	5303	5307	5311	5315	5319	5323	5327	5331	5335	5339	5343	5347	5351	5355	5359	5363	5367	5371	5375	5379	5383	5387	5391	5395	5399	5403	5407	5411	5415	5419	5423	5427	5431	5435	5439	5443	5447	5451	5455	5459	5463	5467	5471	5475	5479	5483	5487	5491	5495	5499	5503	5507	5511	5515	5519	5523	5527	5531	5535	5539	5543	5547

IDB: Entering Indoor Dry Bulb Temperature
 High & low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI (TVA) conditions

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

kW = Total system power

		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
		Entering Indoor Wet Bulb Temperature																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	1965	MBh	55.9	57.9	63.4	-	54.6	56.5	62.0	-	53.3	55.2	60.5	-	52.0	53.9	59.0	-	49.4	51.2	56.1	-	45.7	47.4	51.9	-	45.7	47.4	51.9	-							
		S/T	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-							
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	18	16	12	-							
		kW	4.08	4.16	4.28	-	4.37	4.46	4.60	-	4.63	4.73	4.87	-	4.86	4.96	5.12	-	5.06	5.16	5.33	-	5.23	5.34	5.51	-	5.23	5.34	5.51	-							
		Amps	20.5	20.8	21.3	-	21.7	22.1	22.6	-	23.1	23.5	24.1	-	24.3	24.8	25.4	-	25.5	26.0	26.7	-	26.7	27.3	28.0	-	26.7	27.3	28.0	-							
	1750	Hi PR	251	270	285	-	281	303	320	-	320	344	364	-	365	392	414	-	410	441	466	-	453	488	515	-	453	488	515	-							
		Lo PR	109	116	126	-	115	122	133	-	119	127	139	-	125	133	146	-	131	140	152	-	136	144	158	-	136	144	158	-							
		MBh	54.2	56.2	61.6	-	53.0	54.9	60.1	-	51.7	53.6	58.7	-	50.4	52.3	57.3	-	47.9	49.7	54.4	-	44.4	46.0	50.4	-	44.4	46.0	50.4	-							
		S/T	0.71	0.59	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	0.82	0.68	0.47	-							
		ΔT	20	18	13	-	21	18	13	-	21	18	14	-	21	18	14	-	20	18	13	-	19	17	13	-	19	17	13	-							
1535	kW	4.05	4.13	4.25	-	4.34	4.43	4.56	-	4.60	4.69	4.84	-	4.82	4.93	5.08	-	5.02	5.12	5.28	-	5.18	5.29	5.46	-	5.18	5.29	5.46	-								
	Amps	20.3	20.7	21.2	-	21.5	21.9	22.5	-	22.9	23.4	24.0	-	24.1	24.6	25.2	-	25.4	25.8	26.5	-	26.5	27.1	27.8	-	26.5	27.1	27.8	-								
	Hi PR	248	267	282	-	279	300	317	-	317	341	360	-	361	388	410	-	406	437	461	-	449	483	510	-	449	483	510	-								
	Lo PR	108	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-	134	143	156	-								
	MBh	50.1	51.9	56.8	-	48.9	50.7	55.5	-	47.7	49.5	54.2	-	46.6	48.3	52.9	-	44.2	45.8	50.2	-	41.0	42.5	46.5	-	41.0	42.5	46.5	-								
75	1965	S/T	0.69	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-							
		ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	19	17	13	-	19	17	13	-							
		kW	3.96	4.04	4.15	-	4.24	4.33	4.46	-	4.49	4.58	4.72	-	4.71	4.81	4.96	-	4.90	5.00	5.16	-	5.06	5.17	5.33	-	5.06	5.17	5.33	-							
		Amps	19.9	20.3	20.8	-	21.1	21.5	22.0	-	22.5	22.9	23.4	-	23.6	24.1	24.7	-	24.8	25.3	25.9	-	26.0	26.5	27.2	-	26.0	26.5	27.2	-							
		Hi PR	241	259	274	-	270	291	307	-	307	331	349	-	350	377	398	-	394	424	448	-	435	468	494	-	435	468	494	-							
	1750	Lo PR	104	111	121	-	110	117	128	-	115	122	133	-	120	128	140	-	126	134	146	-	130	139	151	-	130	139	151	-							
		MBh	56.8	58.5	63.3	67.9	55.5	57.1	61.8	66.4	54.2	55.8	60.4	64.8	52.8	54.4	58.9	63.2	50.2	51.7	55.9	60.0	46.5	47.9	51.8	55.6	46.5	47.9	51.8	55.6							
		S/T	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.90	0.81	0.61	0.39	0.93	0.83	0.63	0.41	0.97	0.86	0.65	0.42	0.97	0.87	0.66	0.42	0.97	0.87	0.66	0.42							
		ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	20	16	11	21	20	16	11							
		kW	4.11	4.19	4.32	4.45	4.41	4.50	4.63	4.78	4.67	4.77	4.91	5.07	4.90	5.00	5.16	5.33	5.10	5.21	5.37	5.54	5.27	5.38	5.55	5.73	5.27	5.38	5.55	5.73							
1535	Amps	20.6	21.0	21.5	22.1	21.8	22.2	22.8	23.4	23.3	23.7	24.3	25.0	24.5	25.0	25.6	26.4	25.7	26.2	26.9	27.8	26.9	27.5	28.2	29.1	26.9	27.5	28.2	29.1								
	Hi PR	253	273	288	300	284	306	323	337	323	348	367	383	368	396	418	436	414	446	471	491	458	493	520	543	458	493	520	543								
	Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	137	146	159	170								
	MBh	55.1	56.8	61.5	66.0	53.9	55.5	60.0	64.4	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0	45.1	46.5	50.3	54.0								
	S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40	0.93	0.83	0.63	0.40								
1535	ΔT	23	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	22	20	17	11	22	20	17	11								
	kW	4.08	4.16	4.28	4.41	4.37	4.46	4.60	4.74	4.63	4.73	4.88	5.03	4.86	4.96	5.12	5.28	5.06	5.16	5.33	5.50	5.23	5.34	5.51	5.69	5.23	5.34	5.51	5.69								
	Amps	20.5	20.8	21.3	21.9	21.7	22.1	22.6	23.3	23.1	23.5	24.1	24.8	24.3	24.8	25.4	26.2	25.5	26.0	26.7	27.5	26.7	27.3	28.0	28.9	26.7	27.3	28.0	28.9								
	Hi PR	251	270	285	297	281	303	320	334	320	344	364	379	365	392	414	432	410	441	466	486	453	488	515	537	453	488	515	537								
	Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	162	136	145	158	168	136	145	158	168								
1535	MBh	50.9	52.4	56.7	60.9	49.7	51.2	55.4	59.5	48.5	50.0	54.1	58.1	47.3	48.8	52.8	56.6	45.0	46.3	50.1	53.8	41.7	42.9	46.4	49.8	41.7	42.9	46.4	49.8								
	S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.90	0.80	0.61	0.39	0.90	0.80	0.61	0.39								
	ΔT	24	22	18	12	24	22	18	13	24	22	18	13	24	22	18	13	24	22	18	12	22	21	17	12	22	21	17	12								
	kW	3.99	4.07	4.19	4.31	4.27	4.36	4.49	4.63	4.53	4.62	4.76	4.91	4.75	4.85	5.00	5.16	4.94	5.04	5.20	5.37	5.10	5.21	5.37	5.55	5.10	5.21	5.37	5.55								
	Amps	20.1	20.4	20.9	21.5	21.2	21.6	22.2	22.8	22.6	23.0	23.6	24.3	23.8	24.2	24.9	25.6	25.0	25.5	26.1	26.9	26.1	26.7	27.4	28.2	26.1	26.7	27.4	28.2								
1535	Hi PR	243	262	276	288	273	294	310	324	311	334	353	368	354	381	402	419	398	428	452	472	440	473	500	521	440	473	500	521								
	Lo PR	105	112	122	130	111	118	129	138	116	123	134	143	122	129	141	150	127	136	148	158	132	140	153	163	132	140	153	163								

		Outdoor Ambient Temperature																													
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	
80	1965	MBh	57.8	59.1	63.1	67.5	56.5	57.7	61.6	65.9	55.1	56.3	60.2	64.3	53.8	55.0	58.7	62.8	51.1	52.2	55.8	59.6	47.3	48.4	51.7	55.2	45.9	46.9	50.2	53.6	
		S/T	0.93	0.87	0.71	0.53	0.96	0.90	0.74	0.55	1.00	0.93	0.76	0.56	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61	
		ΔT	25	24	21	17	25	24	21	17	26	24	21	17	25	25	21	17	24	24	21	17	22	23	20	16	22	23	20	16	
		kW	4.14	4.22	4.35	4.48	4.44	4.53	4.67	4.81	4.71	4.80	4.95	5.11	4.94	5.04	5.20	5.37	5.14	5.25	5.41	5.59	5.31	5.42	5.60	5.78	5.31	5.42	5.60	5.78	
		Amps	20.7	21.1	21.6	22.2	22.0	22.4	23.0	23.6	23.4	23.9	24.5	25.2	24.7	25.1	25.8	26.6	25.9	26.4	27.1	28.0	27.1	27.7	28.4	29.3	27.1	27.7	28.4	29.3	
		Hi PR	256	275	291	303	287	309	326	340	327	351	371	387	372	400	423	441	418	450	476	496	462	498	525	548	462	498	525	548	
		Lo PR	111	118	129	137	117	125	136	145	122	129	141	151	128	136	148	158	134	143	156	166	139	147	161	171	139	147	161	171	
		MBh	56.1	57.4	61.3	65.5	54.8	56.0	59.9	64.0	53.5	54.7	58.4	62.5	52.2	53.4	57.0	60.9	49.6	50.7	54.2	57.9	45.9	46.9	50.2	53.6	45.9	46.9	50.2	53.6	
		S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.56	1.00	0.95	0.77	0.58	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58	
		ΔT	26	25	22	17	26	25	22	18	27	25	22	18	27	26	22	18	26	25	22	18	24	24	20	16	24	24	20	16	
kW	4.11	4.19	4.32	4.45	4.41	4.50	4.63	4.78	4.67	4.77	4.91	5.07	4.90	5.00	5.16	5.33	5.10	5.21	5.37	5.54	5.27	5.38	5.55	5.73	5.27	5.38	5.55	5.73			
1535	1750	Amps	20.6	21.0	21.5	22.1	21.8	22.2	22.8	23.4	23.3	23.7	24.3	25.0	24.5	25.0	25.6	26.4	25.7	26.2	26.9	27.8	26.9	27.5	28.2	29.1	26.9	27.5	28.2	29.1	
		Hi PR	253	273	288	300	284	306	323	337	323	348	367	383	368	396	419	436	414	446	471	491	458	493	520	543	458	493	520	543	
		Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	137	146	159	170	
		MBh	51.8	52.9	56.6	60.5	50.6	51.7	55.2	59.1	49.4	50.5	53.9	57.6	48.2	49.2	52.6	56.2	45.8	46.8	50.0	53.4	42.4	43.3	46.3	49.5	42.4	43.3	46.3	49.5	
		S/T	0.86	0.80	0.65	0.49	0.89	0.83	0.68	0.51	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.56	0.98	0.92	0.75	0.56	0.98	0.92	0.75	0.56	
		ΔT	27	25	22	18	27	26	22	18	27	26	22	18	27	26	23	18	27	26	22	18	25	24	21	17	25	24	21	17	
		kW	4.02	4.10	4.22	4.35	4.31	4.39	4.53	4.67	4.56	4.65	4.80	4.95	4.79	4.89	5.04	5.20	4.98	5.08	5.24	5.41	5.14	5.25	5.42	5.59	5.14	5.25	5.42	5.59	
		Amps	20.2	20.5	21.0	21.6	21.4	21.8	22.3	22.9	22.8	23.2	23.8	24.5	24.0	24.4	25.1	25.8	25.2	25.6	26.3	27.1	26.3	26.9	27.6	28.4	26.3	26.9	27.6	28.4	
		Hi PR	246	264	279	291	276	297	313	327	314	338	356	372	357	384	406	423	402	432	457	476	444	478	505	526	444	478	505	526	
		Lo PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165	133	142	155	165	
85	1965	MBh	58.8	60.0	62.8	67.0	57.5	58.6	61.3	65.4	56.1	57.2	59.9	63.9	54.7	55.8	58.4	62.3	52.0	53.0	55.5	59.2	48.2	49.1	51.4	54.8	48.2	49.1	51.4	54.8	
		S/T	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.97	0.78	1.00	1.00	0.98	0.79	1.00	1.00	0.98	0.79	
		ΔT	27	26	25	22	27	27	25	22	26	27	25	22	26	26	25	22	24	25	25	22	23	23	20	20	23	23	20	20	
		kW	4.17	4.26	4.38	4.52	4.47	4.57	4.71	4.85	4.74	4.84	4.99	5.15	4.98	5.08	5.24	5.41	5.18	5.29	5.46	5.63	5.35	5.47	5.64	5.83	5.35	5.47	5.64	5.83	
		Amps	20.9	21.3	21.8	22.4	22.1	22.5	23.1	23.8	23.6	24.0	24.7	25.4	24.8	25.3	26.0	26.8	26.1	26.6	27.3	28.2	27.3	27.9	28.7	29.5	27.3	27.9	28.7	29.5	
		Hi PR	258	278	294	306	290	312	330	344	330	355	375	391	376	404	427	445	423	455	480	501	467	503	531	553	467	503	531	553	
		Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173	140	149	163	173	
		MBh	57.1	58.2	61.0	65.0	55.8	56.9	59.6	63.5	54.5	55.5	58.1	62.0	53.1	54.2	56.7	60.5	50.5	51.4	53.9	57.5	46.7	47.7	49.9	53.2	46.7	47.7	49.9	53.2	
		S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75	1.00	1.00	0.93	0.75	
		ΔT	28	27	26	22	28	28	26	23	28	28	26	23	28	28	26	23	27	27	26	23	25	25	24	21	25	25	24	21	
kW	4.14	4.22	4.35	4.48	4.44	4.53	4.67	4.81	4.71	4.80	4.95	5.11	4.94	5.04	5.20	5.37	5.14	5.25	5.41	5.59	5.31	5.42	5.60	5.78	5.31	5.42	5.60	5.78			
1535	1750	Amps	20.7	21.1	21.6	22.2	22.0	22.4	23.0	23.6	23.4	23.9	24.5	25.2	24.7	25.1	25.8	26.6	25.9	26.4	27.1	28.0	27.1	27.7	28.4	29.3	27.1	27.7	28.4	29.3	
		Hi PR	256	275	291	303	287	309	326	340	327	351	371	387	372	400	423	441	418	450	476	496	462	498	525	548	462	498	525	548	
		Lo PR	111	118	129	137	117	125	136	145	122	129	141	151	128	136	148	158	134	143	156	166	139	147	161	171	139	147	161	171	
		MBh	52.7	53.7	56.3	60.0	51.5	52.5	55.0	58.6	50.3	51.2	53.7	57.2	49.0	50.0	52.3	55.8	46.6	47.5	49.7	53.1	43.1	44.0	46.1	49.1	43.1	44.0	46.1	49.1	
		S/T	0.90	0.87	0.78	0.63	0.93	0.90	0.81	0.66	0.95	0.92	0.83	0.67	0.98	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	0.99	0.90	0.73	1.00	0.99	0.90	0.73	
		ΔT	28	28	26	23	29	28	27	23	29	28	27	23	29	28	27	23	28	28	26	23	26	26	25	21	26	26	25	21	
		kW	4.05	4.13	4.25	4.38	4.34	4.43	4.56	4.70	4.60	4.69	4.84	4.99	4.82	4.92	5.08	5.24	5.02	5.12	5.28	5.45	5.18	5.29	5.46	5.64	5.18	5.29	5.46	5.64	
		Amps	20.3	20.7	21.2	21.8	21.5	21.9	22.5	23.1	22.9	23.4	24.0	24.7	24.1	24.6	25.2	26.0	25.3	25.8	26.5	27.3	26.5	27.1	27.8	28.6	26.5	27.1	27.8	28.6	
		Hi PR	248	267	282	294	279	300	317	330	317	341	360	375	361	388	410	428	406	437	461	481	448	483	510	532	448	483	510	532	
		Lo PR	108	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166	134	143	156	166	

		Outdoor Ambient Temperature																							
		65				75				85				95				105				115			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	40.2	41.6	45.6	-	39.2	40.7	44.6	-	38.3	39.7	43.5	-	37.4	38.7	42.4	-	35.5	36.8	40.3	-	32.9	34.1	37.3	-
	S/T	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.74	0.51	-	0.89	0.74	0.51	-
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-
	1463 kW	2.88	2.94	3.03	-	3.09	3.16	3.25	-	3.28	3.35	3.45	-	3.44	3.52	3.63	-	3.59	3.66	3.78	-	3.71	3.79	3.91	-
	Amps	13.6	13.9	14.2	-	14.5	14.7	15.1	-	15.4	15.7	16.2	-	16.3	16.6	17.1	-	17.1	17.5	18.0	-	18.0	18.3	18.8	-
	Hi PR	231	248	262	-	259	279	294	-	294	317	335	-	335	361	381	-	377	406	429	-	417	449	474	-
	Lo PR	111	118	129	-	117	125	136	-	122	129	141	-	128	136	148	-	134	143	156	-	139	147	161	-
	MBh	39.0	40.4	44.3	-	38.1	39.5	43.3	-	37.2	38.5	42.2	-	36.3	37.6	41.2	-	34.5	35.7	39.1	-	31.9	33.1	36.3	-
	S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-
	ΔT	20	18	13	-	21	18	14	-	21	18	14	-	21	18	14	-	20	18	13	-	19	17	13	-
1138	1300 kW	2.86	2.92	3.00	-	3.07	3.13	3.23	-	3.25	3.32	3.43	-	3.42	3.49	3.60	-	3.56	3.63	3.75	-	3.68	3.76	3.88	-
	Amps	13.5	13.8	14.1	-	14.4	14.6	15.0	-	15.3	15.6	16.0	-	16.2	16.5	16.9	-	17.0	17.3	17.8	-	17.8	18.2	18.7	-
	Hi PR	228	246	260	-	256	276	291	-	292	314	331	-	332	357	377	-	374	402	424	-	413	444	469	-
	Lo PR	110	117	127	-	116	123	135	-	120	128	140	-	127	135	147	-	133	141	154	-	137	146	159	-
	MBh	36.0	37.3	40.9	-	35.2	36.4	39.9	-	34.3	35.6	39.0	-	33.5	34.7	38.0	-	31.8	33.0	36.1	-	29.5	30.5	33.5	-
	S/T	0.71	0.59	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-
	ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	19	17	13	-
	1138 kW	2.79	2.85	2.93	-	3.00	3.06	3.15	-	3.18	3.24	3.34	-	3.34	3.41	3.51	-	3.47	3.55	3.66	-	3.59	3.67	3.78	-
	Amps	13.2	13.5	13.8	-	14.1	14.3	14.7	-	15.0	15.3	15.7	-	15.8	16.1	16.5	-	16.6	17.0	17.4	-	17.4	17.8	18.3	-
	Hi PR	222	238	252	-	249	268	283	-	283	304	321	-	322	347	366	-	362	390	412	-	400	431	455	-
	Lo PR	106	113	124	-	112	120	131	-	117	124	136	-	123	131	143	-	129	137	149	-	133	142	155	-
75	1463 MBh	40.9	42.1	45.5	48.9	39.9	41.1	44.5	47.7	39.0	40.1	43.4	46.6	38.0	39.1	42.4	45.5	36.1	37.2	40.2	43.2	33.4	34.4	37.3	40.0
	S/T	0.88	0.79	0.60	0.38	0.91	0.81	0.62	0.40	0.93	0.84	0.63	0.41	0.96	0.86	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.90	0.68	0.44
	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	20	16	11
	1463 kW	2.90	2.96	3.05	3.15	3.12	3.18	3.28	3.38	3.31	3.38	3.48	3.59	3.47	3.55	3.66	3.78	3.62	3.69	3.81	3.94	3.74	3.82	3.94	4.07
	Amps	13.7	14.0	14.3	14.7	14.6	14.8	15.2	15.7	15.6	15.9	16.3	16.8	16.4	16.7	17.2	17.7	17.3	17.6	18.1	18.7	18.1	18.5	19.0	19.6
	Hi PR	233	251	265	276	262	281	297	310	297	320	338	353	339	365	385	402	381	410	433	452	421	453	479	499
	Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173
	MBh	39.7	40.8	44.2	47.4	38.7	39.9	43.2	46.3	37.8	38.9	42.2	45.2	36.9	38.0	41.1	44.1	35.1	36.1	39.1	41.9	32.5	33.4	36.2	38.8
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42
	ΔT	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	13	24	22	18	13	22	20	17	12
1138	1300 kW	2.88	2.94	3.03	3.12	3.09	3.16	3.25	3.36	3.28	3.35	3.45	3.57	3.45	3.52	3.63	3.75	3.59	3.66	3.78	3.91	3.71	3.79	3.91	4.04
	Amps	13.6	13.9	14.2	14.6	14.5	14.7	15.1	15.6	15.4	15.7	16.2	16.6	16.3	16.6	17.1	17.6	17.1	17.5	18.0	18.5	18.0	18.3	18.8	19.4
	Hi PR	231	248	262	274	259	279	294	307	294	317	335	349	335	361	381	398	377	406	429	447	417	449	474	494
	Lo PR	111	118	129	137	117	125	136	145	122	129	141	151	128	136	149	158	134	143	156	166	139	147	161	171
	MBh	36.6	37.7	40.8	43.8	35.8	36.8	39.9	42.8	34.9	35.9	38.9	41.8	34.1	35.1	38.0	40.7	32.4	33.3	36.1	38.7	30.0	30.9	33.4	35.8
	S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40
	ΔT	24	22	18	12	24	22	18	13	24	22	18	13	24	22	18	13	24	22	18	13	22	21	17	12
	1138 kW	2.81	2.87	2.96	3.05	3.02	3.08	3.18	3.28	3.20	3.27	3.37	3.48	3.36	3.43	3.54	3.66	3.50	3.57	3.69	3.81	3.62	3.70	3.81	3.94
	Amps	13.3	13.6	13.9	14.3	14.2	14.4	14.8	15.2	15.1	15.4	15.8	16.3	15.9	16.2	16.7	17.2	16.7	17.1	17.5	18.1	17.6	17.9	18.4	19.0
	Hi PR	224	241	254	265	251	270	285	298	286	307	325	339	325	350	370	386	366	394	416	434	404	435	460	479
	Lo PR	108	114	125	133	114	121	132	141	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166

IDB: Entering Indoor Dry Bulb Temperature
High & low pressures are measured at the liquid and suction access fittings.

Shaded area reflects ACCA (TVA) conditions

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

kW = Total system power

		Outdoor Ambient Temperature															115														
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	
1463	MBh	41.6	42.5	45.4	48.5	44.3	40.6	41.5	44.3	47.4	44.3	39.6	40.5	43.3	46.3	44.3	38.7	39.5	42.2	45.1	44.3	36.7	37.6	40.1	42.9	44.3	34.0	34.8	37.2	39.7	
	S/T	0.96	0.90	0.74	0.55	0.76	1.00	0.94	0.76	0.57	0.76	1.00	0.96	0.78	0.58	0.76	1.00	1.00	0.81	0.60	0.60	1.00	1.00	0.84	0.63	1.00	1.00	0.84	0.63		
	ΔT	25	24	21	17	21	26	24	21	17	21	25	24	21	17	21	24	25	21	17	17	23	24	21	17	23	21	22	20	16	
	kW	2.92	2.98	3.07	3.17	3.17	3.14	3.21	3.31	3.41	3.41	3.33	3.40	3.51	3.62	3.62	3.50	3.58	3.69	3.81	3.81	3.65	3.72	3.84	3.97	3.77	3.77	3.85	3.98	4.11	
	Amps	13.8	14.1	14.4	14.8	14.7	14.7	14.9	15.3	15.8	15.8	15.7	16.0	16.4	16.9	16.5	16.5	16.9	17.3	17.9	17.9	17.4	17.7	18.2	18.8	18.2	18.6	19.1	19.8	19.8	
	Hi PR	235	253	268	279	264	264	284	300	313	313	300	323	341	356	342	342	368	389	406	406	385	414	437	456	425	458	483	504	504	
80	Lo PR	113	120	131	140	119	119	127	139	148	148	124	132	144	154	130	139	152	161	161	137	145	159	169	141	150	164	175	175	175	
	MBh	40.4	41.3	44.1	47.1	43.1	39.4	40.3	43.1	46.0	43.1	38.5	39.3	42.0	44.9	37.6	38.4	41.0	43.8	43.8	35.7	36.5	39.0	41.6	33.0	33.8	36.1	38.6	38.6	38.6	
	S/T	0.92	0.86	0.70	0.52	0.73	0.95	0.89	0.73	0.54	0.73	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	0.58	1.00	0.98	0.80	0.60	1.00	1.00	0.99	0.81	0.60	0.60	
	ΔT	26	25	22	17	22	27	25	22	18	22	27	25	22	18	27	26	22	18	18	25	25	22	18	23	24	21	16	16	16	
	kW	2.90	2.96	3.05	3.15	3.12	3.12	3.18	3.28	3.38	3.38	3.31	3.38	3.48	3.59	3.47	3.55	3.66	3.78	3.78	3.62	3.69	3.81	3.94	3.74	3.82	3.94	4.07	4.07	4.07	
	Amps	13.7	14.0	14.3	14.7	14.6	14.6	14.8	15.2	15.7	15.7	15.6	15.9	16.3	16.8	16.4	16.4	16.7	17.2	17.7	17.3	17.6	18.1	18.7	18.1	18.5	19.0	19.6	19.6	19.6	
1138	Hi PR	233	251	265	276	262	262	281	297	310	310	297	320	338	353	339	365	385	402	402	381	410	433	452	421	453	479	499	499	499	
	Lo PR	112	119	130	139	118	118	126	137	146	146	123	131	143	152	129	137	150	160	160	135	144	157	167	140	149	163	173	173	173	
	MBh	37.3	38.1	40.7	43.5	36.4	37.2	39.7	42.5	39.7	42.5	35.5	36.3	38.8	41.5	34.7	35.4	37.8	40.5	40.5	32.9	33.6	36.0	38.4	30.5	31.2	33.3	35.6	35.6	35.6	
	S/T	0.89	0.83	0.68	0.51	0.70	0.92	0.86	0.70	0.52	0.70	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	0.55	1.01	0.95	0.77	0.58	1.02	0.95	0.78	0.58	0.58	0.58	
	ΔT	27	26	22	18	23	27	26	23	18	23	27	26	23	18	27	26	23	18	18	27	26	22	18	25	24	21	17	17	17	
	kW	2.84	2.89	2.98	3.07	3.04	3.11	3.20	3.30	3.30	3.30	3.23	3.30	3.40	3.51	3.39	3.46	3.57	3.69	3.69	3.53	3.60	3.72	3.84	3.65	3.73	3.85	3.97	3.97	3.97	
85	Amps	13.4	13.7	14.0	14.4	14.3	14.3	14.5	14.9	15.3	15.3	15.2	15.5	15.9	16.4	16.0	16.4	16.8	17.3	17.3	16.9	17.2	17.7	18.2	17.7	18.1	18.6	19.1	19.1	19.1	
	Hi PR	226	243	257	268	254	254	273	288	301	301	289	311	328	342	329	354	373	390	390	370	398	420	438	408	440	464	484	484	484	
	Lo PR	109	116	126	134	115	115	122	133	142	142	119	127	139	148	125	133	146	155	155	131	140	152	162	136	144	158	168	168	168	
	MBh	42.3	43.1	45.2	48.2	44.1	41.3	42.1	44.1	47.1	44.1	40.3	41.1	43.1	45.9	39.4	40.1	42.0	44.8	44.8	37.4	38.1	39.9	42.6	34.6	35.3	37.0	39.4	39.4	39.4	
	S/T	1.00	0.98	0.88	0.71	1.00	1.00	0.96	0.87	0.74	0.96	1.00	1.00	0.94	0.76	1.00	1.00	0.92	0.75	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78	0.78	0.78	
	ΔT	27	26	25	22	26	26	26	25	22	22	25	26	25	22	25	25	26	22	22	24	24	25	22	22	22	23	20	20	20	
1463	kW	2.95	3.01	3.10	3.19	3.17	3.17	3.23	3.33	3.44	3.44	3.36	3.43	3.54	3.65	3.53	3.61	3.72	3.84	3.84	3.67	3.75	3.88	4.00	3.80	3.88	4.01	4.14	4.14	4.14	
	Amps	13.9	14.2	14.5	14.9	14.8	14.8	15.1	15.4	15.9	15.9	15.8	16.1	16.5	17.0	16.7	17.0	17.5	18.0	18.0	17.5	17.9	18.4	19.0	18.4	18.8	19.3	19.9	19.9	19.9	
	Hi PR	238	256	270	282	267	267	287	303	316	316	303	327	345	360	346	372	393	410	410	389	418	442	461	430	462	488	509	509	509	
	Lo PR	114	122	133	141	121	121	128	140	149	149	125	133	146	155	132	140	153	163	163	138	147	160	171	143	152	166	177	177	177	
	MBh	41.1	41.9	43.9	46.8	40.1	40.1	40.9	42.8	45.7	45.7	39.2	39.9	41.8	44.6	38.2	39.0	40.8	43.5	43.5	36.3	37.0	38.8	41.3	33.6	34.3	35.9	38.3	38.3	38.3	
	S/T	0.96	0.93	0.84	0.68	1.00	1.00	0.96	0.87	0.71	0.96	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78	0.78	0.78	
1300	ΔT	28	28	26	23	28	28	28	26	23	23	28	28	26	23	27	28	27	23	23	26	26	26	23	24	24	24	21	21	21	
	kW	2.92	2.98	3.07	3.17	3.14	3.14	3.21	3.31	3.41	3.41	3.33	3.40	3.51	3.62	3.50	3.58	3.69	3.81	3.81	3.65	3.72	3.84	3.97	3.77	3.85	3.98	4.11	4.11	4.11	
	Amps	13.8	14.1	14.4	14.8	14.7	14.7	14.9	15.3	15.8	15.8	15.7	16.0	16.4	16.9	16.5	16.9	17.3	17.9	17.9	17.4	17.7	18.2	18.8	18.2	18.6	19.1	19.8	19.8	19.8	
	Hi PR	235	253	268	279	264	264	284	300	313	313	300	323	341	356	342	368	389	406	406	385	414	437	456	425	458	483	504	504	504	
	Lo PR	113	120	131	140	119	119	127	139	148	148	124	132	144	154	130	139	152	161	161	137	145	159	169	141	150	164	175	175	175	
	MBh	37.9	38.6	40.5	43.2	37.0	37.7	39.5	42.2	39.5	42.2	36.2	36.9	38.6	41.2	35.3	36.0	37.7	40.2	40.2	33.5	34.2	35.8	38.2	31.0	31.6	33.1	35.4	35.4	35.4	
1138	S/T	0.93	0.90	0.81	0.66	0.96	0.96	0.93	0.84	0.68	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75	0.75	0.75	
	ΔT	28	28	26	23	29	29	28	27	23	23	29	28	27	23	29	29	27	23	23	27	28	27	23	25	26	25	22	22	22	
	kW	2.86	2.91	3.00	3.10	3.07	3.13	3.23	3.33	3.33	3.33	3.25	3.32	3.43	3.54	3.42	3.49	3.60	3.72	3.72	3.56	3.63	3.75	3.87	3.68	3.76	3.88	4.01	4.01	4.01	
	Amps	13.5	13.8	14.1	14.5	14.4	14.6	15.0	15.4	15.4	15.4	15.3	15.6	16.0	16.5	16.2	16.5	16.9	17.4	17.4	17.0	17.3	17.8	18.4	17.8	18.2	18.7	19.3	19.3	19.3	
	Hi PR	228	246	260	271	256	256	276	291	304	304	291	314	331	345	332	357	377	393	393	373	402	424	443	413	444	469	489</			

		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
		Entering Indoor Wet Bulb Temperature																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	1700	MBh	57.7	58.5	60.2	-	57.2	58.0	59.7	-	55.7	56.5	58.2	-	53.2	54.0	55.7	-	50.0	50.8	52.5	-	47.2	48.0	49.7	-	47.2	48.0	49.7	-							
		S/T	0.67	0.59	0.45	-	0.67	0.60	0.46	-	0.70	0.62	0.49	-	0.72	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-							
		ΔT	20	18	14	-	20	18	14	-	20	18	15	-	20	18	14	-	20	18	14	-	21	19	15	-	21	19	15	-							
		kW	3.69	3.69	3.68	-	4.13	4.12	4.12	-	4.61	4.61	4.60	-	5.14	5.14	5.13	-	5.73	5.73	5.72	-	6.42	6.42	6.41	-	6.42	6.42	6.41	-							
		Amps	13.1	13.1	13.0	-	15.0	14.9	14.9	-	17.1	17.1	17.0	-	19.4	19.4	19.3	-	21.9	21.9	21.9	-	24.9	24.9	24.9	-	24.9	24.9	24.9	-							
		Hi PR	281	282	284	-	325	326	328	-	371	372	374	-	421	422	424	-	474	475	477	-	531	532	534	-	531	532	534	-							
70	1800	Lo PR	123	125	128	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-	154	156	159	-							
		MBh	58.1	58.9	60.6	-	57.6	58.4	60.1	-	56.1	56.9	58.6	-	53.6	54.4	56.1	-	50.4	51.2	52.9	-	47.6	48.4	50.1	-	47.6	48.4	50.1	-							
		S/T	0.69	0.61	0.47	-	0.69	0.62	0.48	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-							
		ΔT	20	18	14	-	20	18	14	-	20	18	14	-	20	18	14	-	19	17	14	-	21	19	15	-	21	19	15	-							
		kW	3.70	3.70	3.69	-	4.14	4.13	4.13	-	4.62	4.62	4.61	-	5.15	5.15	5.14	-	5.74	5.74	5.73	-	6.43	6.43	6.42	-	6.43	6.43	6.42	-							
		Amps	13.1	13.1	13.1	-	15.0	15.0	15.0	-	17.1	17.1	17.1	-	19.4	19.4	19.4	-	22.0	22.0	21.9	-	25.0	25.0	24.9	-	25.0	25.0	24.9	-							
70	1900	Hi PR	282	283	285	-	326	327	329	-	372	373	375	-	422	423	425	-	475	476	478	-	532	533	535	-	532	533	535	-							
		Lo PR	124	125	129	-	131	133	136	-	138	139	142	-	143	145	148	-	149	150	153	-	155	157	160	-	155	157	160	-							
		MBh	58.6	59.4	61.1	-	58.1	58.9	60.6	-	56.6	57.4	59.1	-	54.0	54.8	56.5	-	50.9	51.7	53.4	-	48.0	48.8	50.5	-	48.0	48.8	50.5	-							
		S/T	0.70	0.62	0.49	-	0.71	0.63	0.49	-	0.73	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.70	0.56	-	1.00	0.75	0.61	-	1.00	0.75	0.61	-							
		ΔT	19	17	14	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-	20	18	14	-							
		kW	3.71	3.71	3.70	-	4.15	4.14	4.13	-	4.63	4.63	4.62	-	5.16	5.16	5.15	-	5.75	5.75	5.74	-	6.44	6.44	6.43	-	6.44	6.44	6.43	-							
75	1700	Amps	13.1	13.1	13.1	-	15.0	15.0	15.0	-	17.2	17.1	17.1	-	19.5	19.4	19.4	-	22.0	22.0	22.0	-	25.0	25.0	25.0	-	25.0	25.0	25.0	-							
		Hi PR	283	284	286	-	327	328	330	-	373	374	376	-	423	424	426	-	476	477	479	-	533	535	537	-	533	535	537	-							
		Lo PR	125	126	129	-	132	134	137	-	139	140	143	-	144	146	149	-	150	151	154	-	156	158	161	-	156	158	161	-							
		MBh	57.8	58.6	60.3	62.9	57.2	58.0	59.8	62.4	55.8	56.6	58.3	60.9	53.2	54.0	55.7	58.3	50.1	50.9	52.6	55.2	47.2	48.0	49.7	52.3	47.2	48.0	49.7	52.3							
		S/T	0.80	0.72	0.58	0.44	0.80	0.73	0.59	0.45	1.00	0.75	0.62	0.47	1.00	0.77	0.63	0.49	1.00	0.79	0.66	0.51	1.00	1.00	0.71	0.57	1.00	1.00	0.71	0.57							
		ΔT	24	22	19	15	24	22	19	15	25	23	19	15	24	22	19	15	24	22	18	15	25	23	20	16	24	22	18	15							
75	1800	kW	3.69	3.68	3.68	3.71	4.12	4.12	4.11	4.15	4.61	4.61	4.60	4.63	5.14	5.14	5.13	5.16	5.73	5.72	5.72	5.75	6.42	6.42	6.41	6.44	6.42	6.42	6.41	6.44							
		Amps	13.1	13.0	13.0	13.2	15.0	14.9	14.9	15.1	17.1	17.1	17.0	17.2	19.4	19.3	19.3	19.5	21.9	21.9	21.9	22.0	24.9	24.9	24.9	25.0	24.9	24.9	25.0	25.0							
		Hi PR	281	282	284	289	325	326	328	333	371	372	374	379	421	422	424	429	474	476	478	482	531	533	535	539	531	533	535	539							
		Lo PR	123	125	128	133	130	132	135	140	137	138	141	147	142	144	147	152	148	149	152	157	154	156	159	164	154	156	159	164							
		MBh	58.2	59.0	60.7	63.3	57.6	58.5	60.2	62.8	56.2	57.0	58.7	61.3	53.6	54.4	56.1	58.7	50.5	51.3	53.0	55.6	47.6	48.4	50.1	52.7	47.6	48.4	50.1	52.7							
		S/T	0.81	0.74	0.60	0.46	0.82	0.74	0.61	0.47	1.00	0.77	0.63	0.49	1.00	0.79	0.65	0.51	1.00	0.81	0.68	0.53	1.00	1.00	0.73	0.58	1.00	1.00	0.73	0.58							
75	1900	ΔT	24	22	18	15	24	22	18	14	24	22	19	15	24	22	18	14	24	22	18	14	25	23	19	15	24	22	18	14							
		kW	3.70	3.69	3.69	3.73	4.14	4.13	4.12	4.16	4.62	4.62	4.61	4.64	5.15	5.14	5.14	5.17	5.74	5.73	5.73	5.76	6.43	6.42	6.42	6.45	6.43	6.42	6.42	6.45							
		Amps	13.1	13.1	13.0	13.2	15.0	15.0	14.9	15.1	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5	22.0	21.9	21.9	22.1	25.0	25.0	24.9	25.1	25.0	25.0	24.9	25.1							
		Hi PR	282	284	286	290	326	328	329	334	372	374	376	380	422	423	425	430	475	477	479	483	533	534	536	541	533	534	536	541							
		Lo PR	124	125	129	134	131	133	136	141	138	139	142	148	143	145	148	153	149	150	153	158	155	157	160	165	155	157	160	165							
		MBh	58.6	59.4	61.1	63.7	58.1	58.9	60.6	63.2	56.6	57.4	59.1	61.7	54.0	54.8	56.5	59.1	50.9	51.7	53.4	56.0	48.1	48.9	50.6	53.2	48.1	48.9	50.6	53.2							
75	1900	S/T	0.83	0.75	0.62	0.47	0.83	0.76	0.62	0.48	1.00	0.78	0.65	0.50	1.00	0.80	0.67	0.52	1.00	0.83	0.69	0.55	1.00	1.00	0.74	0.60	1.00	1.00	0.74	0.60							
		ΔT	24	22	18	14	23	21	18	14	24	22	18	14	23	21	18	14	23	21	18	14	24	22	19	15	24	22	19	15							
		kW	3.71	3.70	3.70	3.73	4.14	4.14	4.13	4.17	4.63	4.63	4.62	4.65	5.16	5.15	5.15	5.18	5.75	5.74	5.73	5.77	6.44	6.43	6.43	6.46	6.44	6.43	6.43	6.46							
		Amps	13.1	13.1	13.1	13.2	15.0	15.0	15.0	15.1	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5	22.0	22.0	22.0	22.1	25.0	25.0	25.0	25.1	25.0	25.0	25.0	25.1							
		Hi PR	283	285	287	291	327	329	331	335	373	375	377	381	423	424	426	431	477	478	480	485	534	535	537	542	534	535	537	542							
		Lo PR	125	126	129	135	132	134	137	142	139	140	143	148	144	146	149	154	150	151	154	159	156	158	161	166	156	158	161	166							

		Outdoor Ambient Temperature																													
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	
80	MBh	58.1	58.9	60.6	63.2	65.0	57.5	58.3	60.0	62.6	65.0	56.1	56.9	58.6	61.2	63.6	53.5	54.3	56.0	58.6	61.2	63.6	50.4	51.2	52.9	55.5	47.5	48.3	50.0	52.6	
	S/T	1.00	0.85	0.71	0.57	0.43	1.00	0.85	0.72	0.57	0.43	1.00	0.88	0.74	0.60	0.46	1.00	0.90	0.76	0.62	0.48	0.34	1.00	1.00	0.78	0.64	1.00	1.00	0.83	0.69	
	ΔT	29	27	23	19	15	29	27	23	19	15	29	27	23	19	15	29	27	23	19	15	28	27	23	19	30	28	24	20		
	kW	3.69	3.69	3.68	3.71	3.74	4.13	4.12	4.12	4.15	4.18	4.61	4.61	4.60	4.64	5.14	5.14	5.13	5.16	5.16	5.17	5.73	5.73	5.72	5.75	6.42	6.42	6.41	6.44		
	Amps	13.1	13.1	13.0	13.2	13.3	15.0	14.9	14.9	15.1	15.2	17.1	17.1	17.0	17.2	19.4	19.4	19.3	19.5	19.5	21.9	21.9	21.9	22.0	24.9	24.9	24.9	25.0	25.0	25.0	
	Hi PR	282	283	285	290	293	326	327	329	334	337	372	373	375	380	383	421	421	423	425	425	475	476	478	483	532	533	535	540	540	540
	Lo PR	124	125	128	133	136	131	132	136	141	144	137	139	142	147	150	143	144	147	150	153	148	150	153	158	155	156	160	165	165	165
	MBh	58.5	59.3	61.0	63.6	66.2	57.9	58.7	60.4	63.0	65.6	56.5	57.3	59.0	61.6	64.2	53.9	54.7	56.4	59.0	61.6	64.2	50.8	51.6	53.3	55.9	47.9	48.7	50.4	53.0	55.6
	S/T	1.00	0.86	0.73	0.59	0.45	1.00	0.87	0.73	0.59	0.45	1.00	0.90	0.76	0.62	0.48	1.00	0.91	0.78	0.64	0.50	1.00	1.00	0.80	0.66	1.00	1.00	0.85	0.71	0.57	
	ΔT	28	26	23	19	15	28	26	23	19	15	29	27	23	19	15	28	26	23	19	15	28	26	22	19	29	27	24	20	16	12
1800	kW	3.70	3.70	3.69	3.72	3.75	4.14	4.13	4.13	4.16	4.19	4.62	4.62	4.61	4.65	5.15	5.15	5.14	5.17	5.17	5.18	5.74	5.74	5.73	5.76	6.43	6.43	6.42	6.45	6.45	6.45
	Amps	13.1	13.1	13.1	13.2	13.3	15.0	15.0	15.0	15.1	15.2	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5	19.5	22.0	22.0	22.0	22.1	25.0	25.0	25.0	24.9	25.1	25.1	25.1
	Hi PR	283	284	286	291	294	327	328	330	335	338	373	374	376	381	384	422	422	424	426	426	476	477	479	484	533	534	534	536	541	541
	Lo PR	124	126	129	134	137	132	133	136	142	145	138	140	143	148	151	144	145	148	151	154	149	151	154	159	156	157	161	166	166	166
	MBh	58.9	59.7	61.4	64.0	66.6	58.4	59.2	60.9	63.5	66.1	56.9	57.7	59.4	62.0	64.6	54.3	55.1	56.8	59.4	62.0	64.6	51.2	52.0	53.7	56.3	48.4	49.2	50.9	53.5	56.1
	S/T	1.00	0.88	0.74	0.60	0.46	1.00	0.88	0.75	0.61	0.46	1.00	0.91	0.77	0.63	0.49	1.00	1.00	0.79	0.65	0.51	1.00	1.00	0.81	0.67	1.00	1.00	0.87	0.72	0.58	0.44
	ΔT	28	26	22	18	14	28	26	22	18	14	28	26	22	18	14	28	26	22	18	14	28	26	22	18	29	27	23	19	15	11
	kW	3.71	3.71	3.70	3.73	3.76	4.14	4.14	4.13	4.17	4.20	4.63	4.63	4.62	4.65	5.16	5.16	5.15	5.18	5.18	5.75	5.74	5.74	5.77	6.44	6.44	6.43	6.46	6.46	6.46	6.46
	Amps	13.1	13.1	13.1	13.2	13.3	15.0	15.0	15.0	15.1	15.2	17.2	17.1	17.1	17.3	19.5	19.5	19.4	19.5	19.5	22.0	22.0	22.0	22.0	25.0	25.0	25.0	25.0	25.1	25.1	25.1
	Hi PR	284	285	287	292	295	328	329	331	336	339	374	375	377	382	385	424	424	425	427	427	477	478	480	485	534	535	537	542	542	542
Lo PR	125	127	130	135	138	133	134	137	143	146	139	141	144	149	152	145	146	149	152	155	150	152	155	160	157	158	161	167	167	167	
85	MBh	59.0	59.8	61.5	64.1	66.7	58.5	59.3	61.0	63.6	66.2	57.0	57.8	59.5	62.1	64.7	54.5	55.3	57.0	59.6	62.2	64.8	51.3	52.1	53.8	56.4	48.5	49.3	51.0	53.6	56.2
	S/T	1.00	0.95	0.81	0.67	0.53	1.00	0.95	0.82	0.67	0.53	1.00	1.00	0.84	0.70	0.56	1.00	1.00	0.86	0.72	0.58	1.00	1.00	0.88	0.74	1.00	1.00	1.00	1.00	1.00	1.00
	ΔT	33	31	27	23	19	33	31	27	23	19	33	31	27	23	19	33	31	27	23	19	32	30	27	23	34	32	28	24	20	16
	kW	3.70	3.70	3.69	3.72	3.75	4.14	4.13	4.12	4.16	4.19	4.62	4.62	4.61	4.64	4.68	5.15	5.15	5.14	5.17	5.17	5.74	5.74	5.73	5.76	6.43	6.43	6.42	6.45	6.45	6.45
	Amps	13.1	13.1	13.1	13.2	13.3	15.0	15.0	15.0	15.1	15.2	17.1	17.1	17.1	17.2	19.4	19.4	19.4	19.5	19.5	22.0	22.0	22.0	22.1	25.0	25.0	24.9	25.1	25.1	25.1	25.1
	Hi PR	283	284	286	291	294	327	328	330	335	338	373	374	376	381	384	423	423	424	426	426	476	477	479	484	533	534	534	536	541	541
	Lo PR	125	127	130	135	138	133	134	137	143	146	139	141	144	149	152	145	146	149	152	155	150	152	155	160	157	158	161	167	167	167
	MBh	59.4	60.2	61.9	64.5	67.1	58.9	59.7	61.4	64.0	66.6	57.4	58.2	59.9	62.5	65.1	54.9	55.7	57.4	60.0	62.6	65.2	51.7	52.5	54.2	56.8	48.9	49.7	51.4	54.0	56.6
	S/T	1.00	0.97	0.83	0.69	0.55	1.00	0.97	0.84	0.69	0.55	1.00	1.00	0.86	0.72	0.58	1.00	1.00	0.88	0.74	0.60	1.00	1.00	0.90	0.76	1.00	1.00	1.00	1.00	1.00	1.00
	ΔT	32	30	27	23	19	32	30	26	22	18	32	30	27	23	19	32	30	26	22	18	32	30	26	22	33	31	27	24	20	16
1800	kW	3.71	3.70	3.70	3.73	3.76	4.14	4.14	4.13	4.17	4.20	4.63	4.63	4.62	4.65	5.16	5.16	5.15	5.18	5.18	5.75	5.74	5.74	5.77	6.44	6.44	6.43	6.46	6.46	6.46	6.46
	Amps	13.1	13.1	13.1	13.2	13.3	15.0	15.0	15.0	15.1	15.2	17.2	17.1	17.1	17.3	19.4	19.4	19.4	19.5	19.5	22.0	22.0	22.0	22.1	25.0	25.0	25.0	25.0	25.1	25.1	25.1
	Hi PR	284	285	287	292	295	328	329	331	336	339	374	375	377	382	385	424	424	425	427	427	477	478	480	485	534	535	537	542	542	542
	Lo PR	126	128	131	136	139	134	135	138	144	147	140	142	145	150	153	146	147	150	153	156	151	152	155	161	158	159	162	167	167	167
	MBh	59.9	60.7	62.4	65.0	67.6	59.3	60.1	61.8	64.4	67.0	57.9	58.7	60.4	63.0	65.6	55.3	56.1	57.8	60.4	63.0	65.6	52.2	53.0	54.7	57.3	49.3	50.1	51.8	54.4	57.0
	S/T	1.00	0.98	0.84	0.70	0.56	1.00	1.00	0.85	0.71	0.56	1.00	1.00	0.87	0.73	0.59	1.00	1.00	0.89	0.75	0.61	1.00	1.00	0.92	0.77	1.00	1.00	1.00	1.00	1.00	1.00
	ΔT	32	30	26	22	18	32	30	26	22	18	32	30	26	22	18	32	30	26	22	18	31	29	26	22	33	31	27	23	19	15
	kW	3.72	3.71	3.71	3.74	3.77	4.15	4.15	4.14	4.18	4.21	4.64	4.64	4.63	4.66	5.17	5.16	5.16	5.19	5.19	5.76	5.75	5.75	5.78	6.45	6.44	6.44	6.47	6.47	6.47	6.47
	Amps	13.2	13.2	13.1	13.3	13.4	15.1	15.1	15.0	15.2	15.3	17.2	17.2	17.1	17.3	19.5	19.5	19.4	19.6	19.6	22.0	22.0	22.0	22.1	2						

		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70		Entering Indoor Wet Bulb Temperature																																			
	975	MBh	41.0	41.6	42.8	-	40.6	41.2	42.4	-	39.6	40.2	41.4	-	37.7	38.3	39.5	-	35.5	36.1	37.3	-	33.4	34.0	35.2	-	33.4	34.0	35.2	-	33.4	34.0	35.2	-			
		S/T	0.63	0.55	0.41	-	0.64	0.56	0.42	-	0.66	0.58	0.44	-	1.00	0.60	0.46	-	1.00	0.63	0.49	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-			
		ΔT	20	19	15	-	20	18	15	-	21	19	15	-	20	18	15	-	20	18	15	-	21	19	16	-	21	19	16	-	21	19	16	-			
		kW	2.31	2.31	2.30	-	2.58	2.58	2.58	-	2.89	2.89	2.88	-	3.22	3.22	3.21	-	3.59	3.59	3.58	-	4.03	4.02	4.02	-	4.03	4.02	4.02	-	4.03	4.02	4.02	-			
1100		Amps	8.2	8.2	8.1	-	9.4	9.3	9.3	-	10.7	10.7	10.7	-	12.1	12.1	12.1	-	13.7	13.7	13.7	-	15.6	15.6	15.6	-	15.6	15.6	15.6	-	15.6	15.6	15.6	-			
		Hi PR	267	268	270	-	309	310	312	-	353	354	356	-	400	401	403	-	451	452	454	-	506	507	509	-	506	507	509	-	506	507	509	-			
		Lo PR	125	126	130	-	132	134	137	-	139	141	144	-	145	146	149	-	150	152	155	-	157	159	162	-	157	159	162	-	157	159	162	-			
		MBh	41.5	42.1	43.3	-	41.1	41.7	42.9	-	40.1	40.6	41.9	-	38.2	38.8	40.0	-	36.0	36.6	37.8	-	33.9	34.5	35.7	-	33.9	34.5	35.7	-	33.9	34.5	35.7	-			
		S/T	0.68	0.61	0.47	-	0.69	0.61	0.47	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.73	0.59	-	1.00	0.73	0.59	-	1.00	0.73	0.59	-			
1325		ΔT	19	18	14	-	19	17	14	-	20	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-	20	18	15	-	20	18	15	-			
		kW	2.32	2.32	2.31	-	2.60	2.59	2.59	-	2.90	2.90	2.90	-	3.23	3.23	3.23	-	3.60	3.60	3.60	-	4.04	4.04	4.03	-	4.04	4.04	4.03	-	4.04	4.04	4.03	-			
		Amps	8.2	8.2	8.2	-	9.4	9.4	9.4	-	10.7	10.7	10.7	-	12.2	12.2	12.2	-	13.8	13.8	13.8	-	15.7	15.7	15.7	-	15.7	15.7	15.7	-	15.7	15.7	15.7	-			
		Hi PR	269	270	272	-	311	312	314	-	355	356	358	-	402	403	405	-	453	454	456	-	508	509	511	-	508	509	511	-	508	509	511	-			
		Lo PR	126	128	131	-	134	136	139	-	141	142	145	-	146	148	151	-	152	153	157	-	159	160	163	-	159	160	163	-	159	160	163	-			
75		MBh	42.6	43.2	44.4	-	42.3	42.8	44.1	-	41.2	41.8	43.0	-	39.3	39.9	41.2	-	37.1	37.7	38.9	-	35.0	35.6	36.8	-	35.0	35.6	36.8	-	35.0	35.6	36.8	-			
	975	S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.73	0.59	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-			
			ΔT	18	16	12	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-		
			kW	2.34	2.34	2.33	-	2.61	2.61	2.61	-	2.92	2.92	2.91	-	3.25	3.25	3.25	-	3.62	3.62	3.62	-	4.06	4.06	4.05	-	4.06	4.06	4.05	-	4.06	4.06	4.05	-		
			Amps	8.3	8.3	8.3	-	9.5	9.5	9.5	-	10.8	10.8	10.8	-	12.3	12.3	12.2	-	13.9	13.9	13.8	-	15.8	15.8	15.7	-	15.8	15.8	15.7	-	15.8	15.8	15.7	-		
1100		Hi PR	272	273	275	-	314	315	317	-	358	359	361	-	406	407	409	-	457	458	460	-	511	513	514	-	511	513	514	-	511	513	514	-			
		Lo PR	130	131	135	-	138	139	142	-	144	146	149	-	150	151	154	-	155	157	160	-	162	164	167	-	162	164	167	-	162	164	167	-			
	975	MBh	41.0	41.6	42.8	44.7	40.7	41.2	42.5	44.3	39.6	40.2	41.4	43.3	37.8	38.3	39.6	41.4	35.5	36.1	37.3	39.2	33.5	34.0	35.3	37.1	33.5	34.0	35.3	37.1	33.5	34.0	35.3	37.1			
			S/T	0.76	0.68	0.54	0.40	0.77	0.69	0.55	0.40	1.00	0.72	0.58	0.43	1.00	0.74	0.60	0.45	1.00	0.76	0.62	0.47	1.00	1.00	0.67	0.53	1.00	1.00	0.67	0.53	1.00	1.00	0.67	0.53		
			ΔT	25	23	19	16	25	23	19	15	25	23	19	16	25	23	19	15	24	22	19	15	25	24	20	16	25	24	20	16	25	24	20	16		
		kW	2.31	2.30	2.30	2.32	2.58	2.58	2.57	2.60	2.89	2.89	2.88	2.90	3.22	3.22	3.21	3.23	3.59	3.59	3.58	3.60	4.02	4.02	4.02	4.04	4.02	4.02	4.02	4.04	4.02	4.02	4.04	4.02	4.04		
1325		Amps	8.2	8.1	8.1	8.2	9.3	9.3	9.3	9.4	10.7	10.7	10.7	10.7	12.1	12.1	12.1	12.2	13.7	13.7	13.7	13.8	15.6	15.6	15.6	15.7	15.6	15.6	15.7	15.6	15.6	15.7	15.6	15.7	15.6		
		Hi PR	267	268	270	275	309	310	312	317	353	354	356	361	400	401	403	408	451	453	454	459	506	507	509	514	506	507	509	514	506	507	509	514			
		Lo PR	125	126	130	135	132	134	137	142	139	141	144	149	145	146	149	155	150	152	155	160	157	159	162	167	157	159	162	167	157	159	162	167			
		MBh	41.5	42.1	43.3	45.2	41.2	41.7	43.0	44.8	40.1	40.7	41.9	43.8	38.2	38.8	40.1	41.9	36.0	36.6	37.8	39.7	33.9	34.5	35.7	37.6	33.9	34.5	35.7	37.6	33.9	34.5	35.7	37.6			
		S/T	0.82	0.74	0.60	0.45	1.00	0.75	0.61	0.46	1.00	0.77	0.63	0.48	1.00	0.79	0.65	0.50	1.00	0.81	0.67	0.53	1.00	1.00	0.73	0.58	1.00	1.00	0.73	0.58	1.00	1.00	0.73	0.58			
75	975	ΔT	24	22	18	14	24	22	18	14	24	22	18	15	24	22	18	14	23	21	18	14	24	23	19	15	24	23	19	15	24	23	19	15			
			kW	2.32	2.32	2.31	2.33	2.59	2.59	2.59	2.61	2.90	2.90	2.89	2.91	3.23	3.23	3.23	3.25	3.60	3.60	3.60	3.62	4.04	4.04	4.03	4.05	4.04	4.04	4.03	4.05	4.04	4.03	4.05			
			Amps	8.2	8.2	8.2	8.3	9.4	9.4	9.4	9.5	10.7	10.7	10.7	10.8	12.2	12.2	12.1	12.2	13.8	13.8	13.8	13.9	15.7	15.7	15.6	15.7	15.7	15.7	15.6	15.6	15.7	15.6	15.7	15.6		
			Hi PR	269	270	272	277	311	312	314	319	355	356	358	363	402	404	405	410	453	455	457	461	508	509	511	516	508	509	511	516	508	509	511	516		
		Lo PR	127	128	131	137	134	136	139	144	141	142	145	151	146	148	151	156	152	153	157	162	159	160	163	169	159	160	163	169	159	160	163	169			
1325		MBh	42.6	43.2	44.5	46.3	42.3	42.9	44.1	46.0	41.2	41.8	43.0	44.9	39.4	40.0	41.2	43.0	37.1	37.7	38.9	40.8	35.1	35.6	36.9	38.7	35.1	35.6	36.9	38.7	35.1	35.6	36.9	38.7			
		S/T	0.86	0.78	0.64	0.50	1.00	0.79	0.65	0.50	1.00	0.82	0.68	0.53	1.00	0.84	0.70	0.55	1.00	1.00	0.72	0.57	1.00	1.00	0.73	0.63	1.00	1.00	0.73	0.63	1.00	1.00	0.73	0.63			
		ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	23	21	17	14	23	21	17	14	23	21	17	14			
		kW	2.34	2.34	2.33	2.35	2.61	2.61	2.61	2.63	2.92	2.92	2.91	2.93	3.2																						

		Outdoor Ambient Temperature												115																							
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175						
		Entering Indoor Wet Bulb Temperature																																			
80	MBh	41.2	41.8	43.0	44.9	40.9	41.5	42.7	44.6	39.8	40.4	41.6	43.5	38.0	38.5	39.8	41.6	35.7	36.3	37.5	39.4	33.7	34.2	35.5	37.3	33.7	34.2	35.5	37.3	33.7	34.2	35.5	37.3				
	S/T	1.00	0.81	0.67	0.53	1.00	0.82	0.68	0.53	1.00	0.85	0.71	0.56	1.00	1.00	0.73	0.58	1.00	1.00	0.75	0.60	1.00	1.00	0.80	0.65	1.00	1.00	0.80	0.65	1.00	1.00	0.80	0.65				
	ΔT	29	27	23	20	29	27	23	20	29	27	24	20	29	27	23	20	29	27	23	19	30	28	24	21	30	28	24	21	30	28	24	21				
	kW	2.31	2.31	2.30	2.32	2.58	2.58	2.58	2.60	2.89	2.89	2.88	2.90	3.22	3.22	3.21	3.24	3.59	3.59	3.58	3.61	4.03	4.02	4.02	4.04	4.03	4.02	4.02	4.03	4.02	4.02	4.03	4.04				
	Amps	8.2	8.2	8.1	8.2	9.4	9.3	9.3	9.4	10.7	10.7	10.7	10.7	12.1	12.1	12.1	12.2	13.7	13.7	13.7	13.8	15.6	15.6	15.6	15.7	15.6	15.6	15.6	15.7	15.6	15.6	15.7	15.8				
80	Hi PR	267	268	270	275	309	311	312	317	353	355	356	361	401	402	404	408	452	453	455	460	506	508	510	514	506	508	510	514	506	508	510	514				
	Lo PR	125	127	130	135	133	135	138	143	140	141	144	150	145	147	150	155	151	152	155	161	158	159	162	168	158	159	162	168	158	159	162	168				
	MBh	41.7	42.3	43.5	45.4	41.4	42.0	43.2	45.0	40.3	40.9	42.1	44.0	38.5	39.0	40.3	42.1	36.2	36.8	38.0	39.9	34.2	34.7	36.0	37.8	34.2	34.7	36.0	37.8	34.2	34.7	36.0	37.8				
	S/T	1.00	0.87	0.73	0.58	1.00	0.87	0.74	0.59	1.00	0.90	0.76	0.61	1.00	1.00	0.78	0.63	1.00	1.00	0.80	0.66	1.00	1.00	0.86	0.71	1.00	1.00	0.86	0.71	1.00	1.00	0.86	0.71				
	ΔT	28	26	22	19	28	26	22	19	28	26	23	19	28	26	22	19	27	26	22	18	29	27	23	20	29	27	23	20	29	27	23	20				
1100	kW	2.32	2.32	2.31	2.34	2.60	2.59	2.59	2.61	2.90	2.90	2.90	2.92	3.23	3.23	3.23	3.25	3.60	3.60	3.60	3.62	4.04	4.04	4.04	4.05	4.04	4.04	4.04	4.05	4.04	4.04	4.05	4.05				
	Amps	8.2	8.2	8.2	8.3	9.4	9.4	9.4	9.5	10.7	10.7	10.7	10.8	12.2	12.2	12.2	12.2	13.8	13.8	13.8	13.9	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7				
	Hi PR	269	271	272	277	311	313	314	319	355	357	358	363	403	404	406	411	454	455	457	462	509	510	512	516	509	510	512	516	509	510	512	516				
	Lo PR	127	129	132	137	135	136	139	145	141	143	146	151	147	148	152	157	152	154	157	162	159	161	164	169	159	161	164	169	159	161	164	169				
	1325	MBh	42.9	43.4	44.7	46.5	42.5	43.1	44.3	46.2	41.4	42.0	43.2	45.1	39.6	40.2	41.4	43.3	37.3	37.9	39.1	41.0	35.3	35.9	37.1	39.0	35.3	35.9	37.1	39.0	35.3	35.9	37.1	39.0			
S/T		1.00	0.91	0.77	0.63	1.00	0.92	0.78	0.63	1.00	1.00	0.81	0.66	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.70	1.00	1.00	0.85	0.70	1.00	1.00	0.85	0.70	1.00	1.00	0.85	0.70				
ΔT		26	24	21	17	26	24	21	17	27	25	21	17	26	24	21	17	26	24	21	17	27	25	22	18	27	25	22	18	27	25	22	18				
kW		2.34	2.34	2.33	2.35	2.61	2.61	2.61	2.63	2.92	2.92	2.91	2.94	3.25	3.25	3.25	3.27	3.62	3.62	3.62	3.64	4.06	4.06	4.06	4.07	4.06	4.06	4.06	4.07	4.06	4.06	4.07	4.07				
Amps		8.3	8.3	8.3	8.4	9.5	9.5	9.5	9.6	10.8	10.8	10.8	10.9	12.3	12.3	12.3	12.3	13.9	13.9	13.9	13.9	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.7	15.7	15.7	15.8	15.8				
85	Hi PR	273	274	276	281	315	316	318	323	359	360	362	367	406	408	410	414	458	459	461	465	512	513	515	520	512	513	515	520	512	513	515	520				
	Lo PR	131	132	135	141	138	140	143	148	145	146	149	155	150	152	155	160	156	157	161	166	163	164	167	173	163	164	167	173	163	164	167	173				
	MBh	41.9	42.5	43.7	45.6	41.6	42.1	43.4	45.2	40.5	41.1	42.3	44.2	38.7	39.2	40.5	42.3	36.4	37.0	38.2	40.1	34.4	34.9	36.2	38.0	34.4	34.9	36.2	38.0	34.4	34.9	36.2	38.0				
	S/T	1.00	0.92	0.78	0.63	1.00	1.00	0.78	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.71	1.00	1.00	0.76	0.61	1.00	1.00	0.85	0.71	1.00	1.00	0.76	0.61				
	ΔT	33	31	27	23	33	31	27	23	33	31	27	24	33	31	27	23	32	30	27	23	33	32	28	24	33	32	28	24	33	32	28	24				
975	kW	2.31	2.31	2.31	2.33	2.59	2.59	2.58	2.60	2.89	2.89	2.89	2.91	3.23	3.22	3.22	3.24	3.60	3.59	3.59	3.61	4.03	4.03	4.03	4.05	4.03	4.03	4.03	4.05	4.03	4.03	4.05	4.05				
	Amps	8.2	8.2	8.2	8.2	9.4	9.4	9.4	9.4	10.7	10.7	10.7	10.8	12.2	12.1	12.1	12.2	13.8	13.8	13.7	13.8	15.7	15.7	15.6	15.7	15.7	15.7	15.6	15.6	15.7	15.7	15.7					
	Hi PR	269	270	272	276	311	312	314	318	355	356	358	362	402	403	405	410	453	454	456	461	508	509	511	515	508	509	511	515	508	509	511	515				
	Lo PR	127	129	132	137	135	136	140	145	141	143	146	151	147	149	152	157	153	154	157	163	160	161	164	170	160	161	164	170	160	161	164	170				
	1100	MBh	42.4	43.0	44.2	46.1	42.1	42.6	43.9	45.7	41.0	41.6	42.8	44.7	39.2	39.7	41.0	42.8	36.9	37.5	38.7	40.6	34.8	35.4	36.7	38.5	34.8	35.4	36.7	38.5	34.8	35.4	36.7	38.5			
S/T		1.00	0.97	0.83	0.69	1.00	1.00	0.84	0.69	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.80	0.66	1.00	1.00	0.76	0.61	1.00	1.00	0.80	0.66	1.00	1.00	0.76	0.61				
ΔT		32	30	26	22	31	30	26	22	32	30	26	23	31	30	26	22	31	29	26	22	32	31	27	23	32	31	27	23	32	31	27	23				
kW		2.33	2.32	2.32	2.34	2.60	2.60	2.59	2.62	2.91	2.91	2.90	2.92	3.24	3.24	3.24	3.25	3.61	3.61	3.60	3.62	4.04	4.04	4.04	4.06	4.04	4.04	4.04	4.06	4.04	4.04	4.06	4.06				
Amps		8.2	8.2	8.2	8.3	9.4	9.4	9.4	9.5	10.8	10.8	10.7	10.8	12.2	12.2	12.2	12.3	13.8	13.8	13.8	13.9	15.7	15.7	15.7	15.8	15.7	15.7	15.7	15.7	15.7	15.7	15.8	15.8				
85	Hi PR	271	272	274	278	313	314	316	320	357	358	360	364	404	405	407	412	455	456	458	463	510	511	513	517	510	511	513	517	510	511	513	517				
	Lo PR	129	130	134	139	137	138	141	147	143	145	148	153	149	150	153	159	154	156	159	164	161	163	166	171	161	163	166	171	161	163	166	171				
	MBh	43.6	44.1	45.4	47.2	43.2	43.8	45.0	46.9	42.1	42.7	43.9	45.8	40.3	40.9	42.1	43.9	38.0	38.6	39.8	41.7	36.0	36.6	37.8	39.6	36.0	36.6	37.8	39.6	36.0	36.6	37.8	39.6				
	S/T	1.00	1.00	0.88	0.73	1.00	1.00	0.88	0.74	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	0.81	0.67	1.00	1.00	0.81	0.66	1.00	1.00	0.81	0.67	1.00	1.00	0.81	0.66				
	ΔT	30	28	25	21	30	28	25	21	30	28	25	21	30	28	24	21	30	28	24	21	31	29	25	22	31	29	25	22	31	29	25	22				

DP14GM3608043** - RISE RANGE: 30° - 60°

E.S.P	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	745	76	X	1,115	206	55	1,265	285	49	1,305	311	1,440	426
0.2	690	84	X	1,075	215	57	1,230	290	50	1,265	320	1,390	428
0.3	635	91	X	1,030	221	60	1,175	300	52	1,225	325	1,365	440
0.4	570	98	X	985	233	X	1,140	303	54	1,180	334	1,335	440
0.5	505	107	X	940	234	X	1,100	311	56	1,140	338	1,295	456
0.6	450	115	X	895	242	X	1,055	319	58	1,095	349	1,255	456
0.7	395	118	X	845	248	X	1,010	326	X	1,050	350	1,220	465
0.8	345	126	X	785	252	X	960	335	X	1,010	357	1,180	468

DP14GM4808043** - RISE RANGE: 30° - 60°


E.S.P	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	1,055	156	58	1,380	298	45	1,415	327	43	1,630	504	1,780	647
0.2	1,000	166	X	1,320	312	47	1,360	335	45	1,583	511	1,740	658
0.3	940	173	X	1,270	318	48	1,305	343	47	1,541	523	1,695	661
0.4	880	181	X	1,220	327	50	1,260	353	49	1,486	536	1,640	679
0.5	825	189	X	1,160	336	53	1,200	359	51	1,441	535	1,595	675
0.6	760	204	X	1,115	342	55	1,150	371	53	1,396	544	1,550	693
0.7	705	207	X	1,060	347	58	1,110	375	55	1,348	548	1,505	690
0.8	625	210	X	1,000	361	X	1,060	381	58	1,301	557	1,465	696

DP14GM6108043** - RISE RANGE: 30° - 60°


E.S.P	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED		T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	1,285	252	36	1,370	297	45	1,340	276	1780	620	1,940	844
0.2	1,235	259	37	1,330	304	46	1,270	279	1745	646	1,910	834
0.3	1,180	272	39	1,280	314	48	1,235	292	1700	640	1,880	840
0.4	1,130	272	41	1,220	321	50	1,175	296	1655	638	1,825	857
0.5	1,085	280	42	1,180	341	52	1,135	308	1610	656	1,790	865
0.6	1,035	294	45	1,135	339	54	1,085	318	1560	659	1,735	867
0.7	975	297	47	1,085	347	57	1,040	328	1520	664	1,700	877
0.8	910	319	51	1,035	359	59	975	337	1475	675	1,660	886

P14GM146112043** - RISE RANGE: 35° - 65°

E.S.P	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED		T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	1,345	281	51	1,745	558	53	1,340	276	1780	620	1,940	729
0.2	1,300	286	53	1,705	567	54	1,270	279	1745	646	1,897	736
0.3	1,255	295	55	1,660	572	56	1,235	292	1700	640	1,855	742
0.4	1,205	308	57	1,620	582	57	1,175	296	1655	638	1,811	750
0.5	1,165	322	59	1,580	589	58	1,135	308	1610	656	1,764	757
0.6	1,110	335	62	1,535	604	60	1,085	318	1560	659	1,726	763
0.7	1,055	334	X	1,485	613	62	1,040	328	1520	664	1,682	770
0.8	1,010	346	X	1,435	606	64	975	337	1475	675	1,639	776

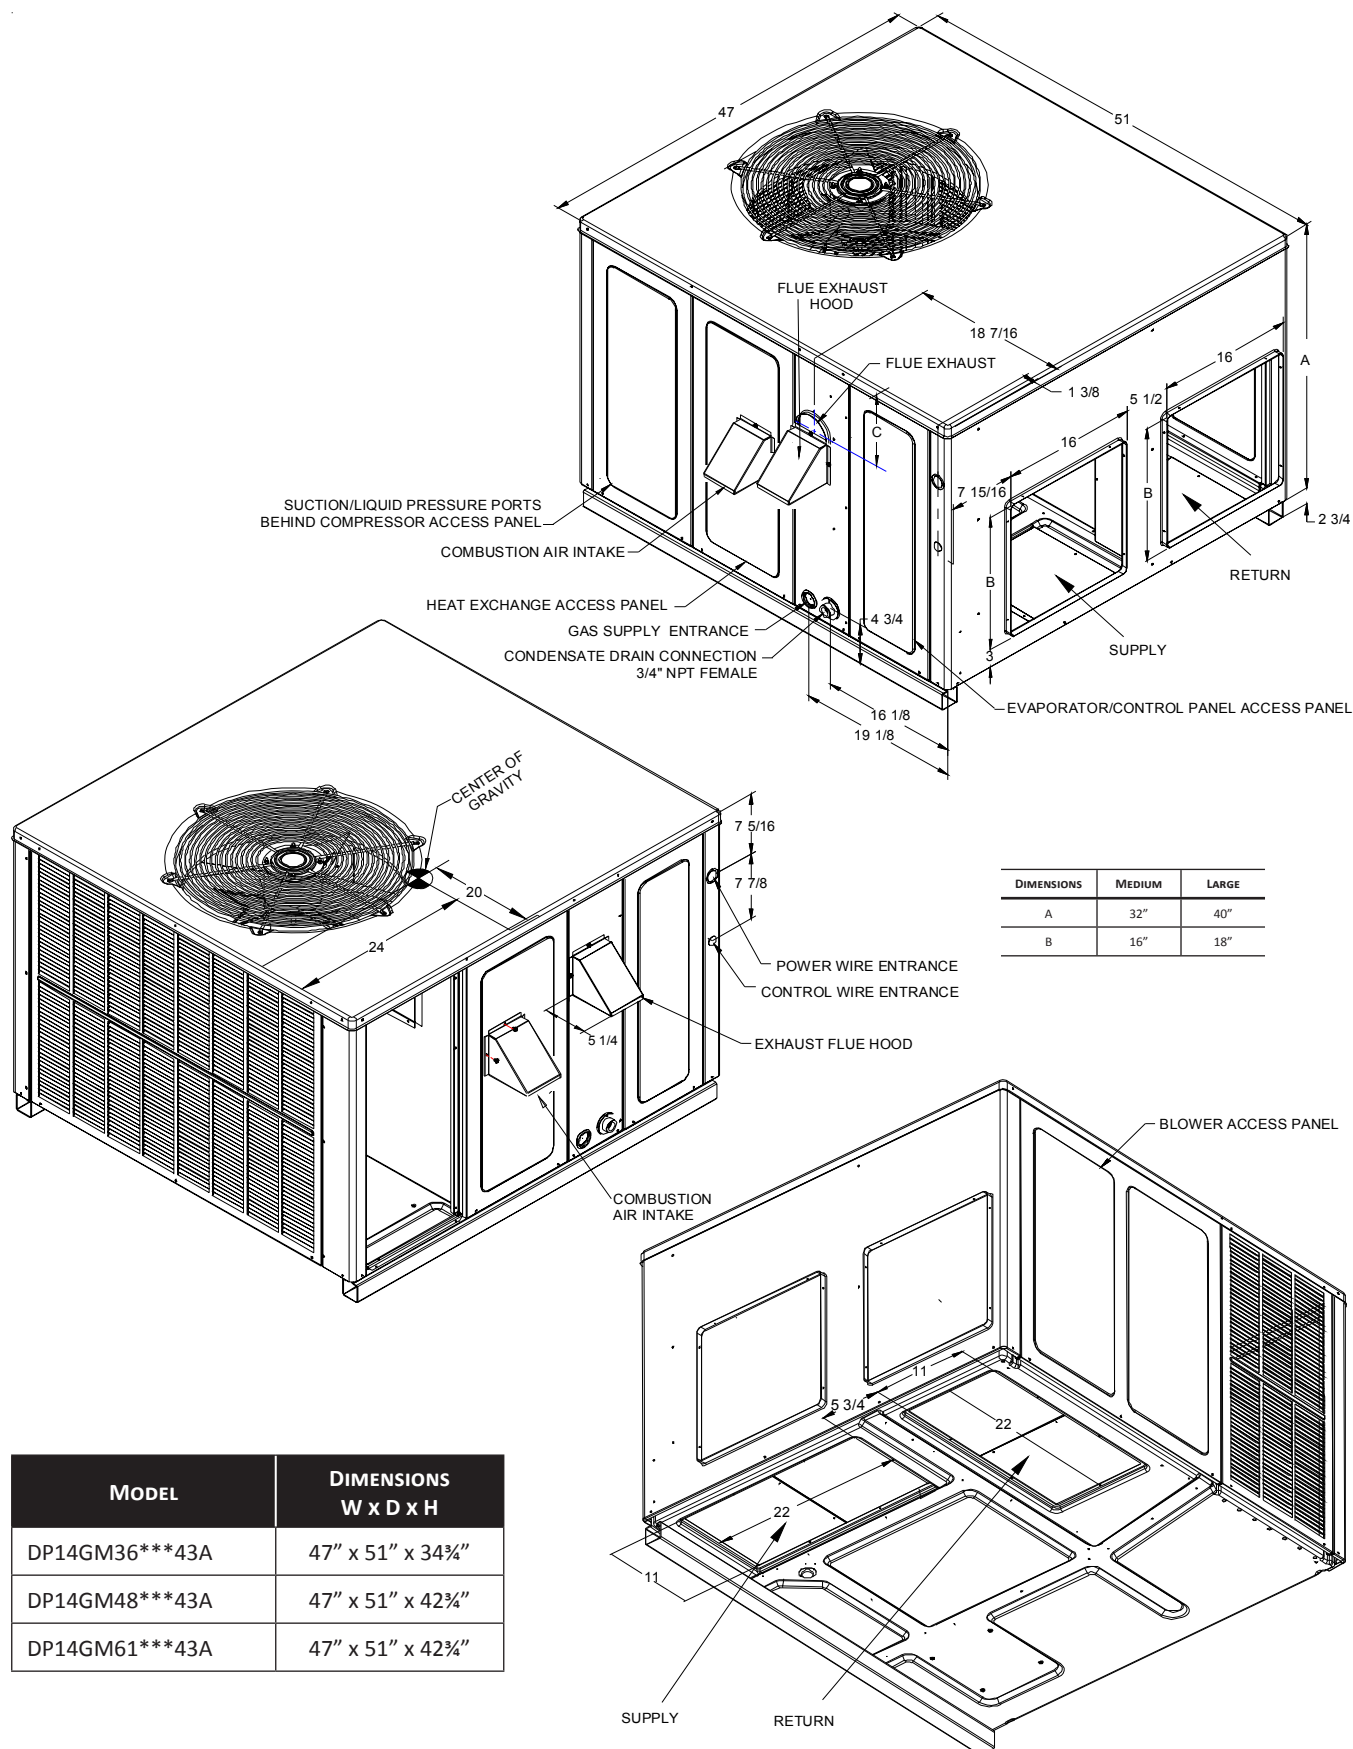

MODEL	DIMENSIONS W x D x H
DP14GM36***43A	47" x 51" x 34 3/4"
DP14GM48***43A	47" x 51" x 42 3/4"
DP14GM61***43A	47" x 51" x 42 3/4"

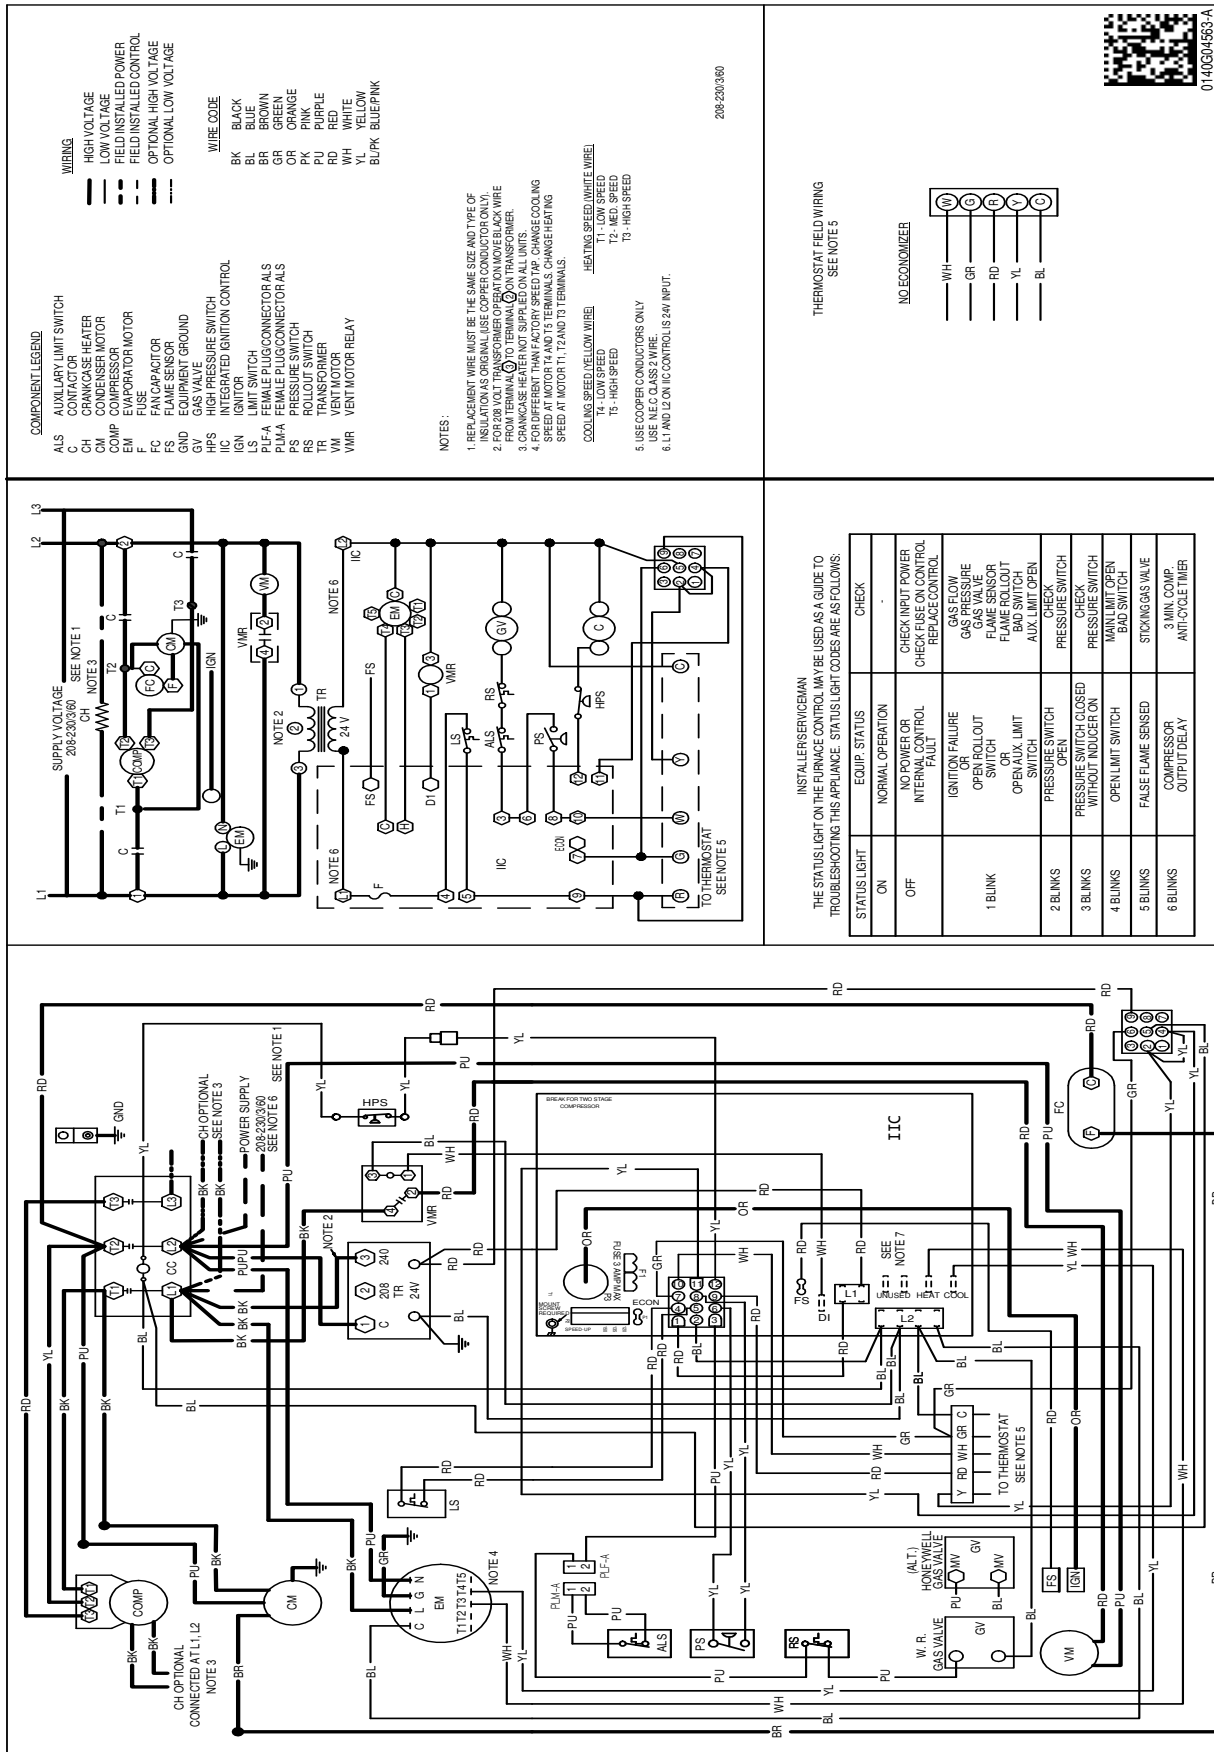


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

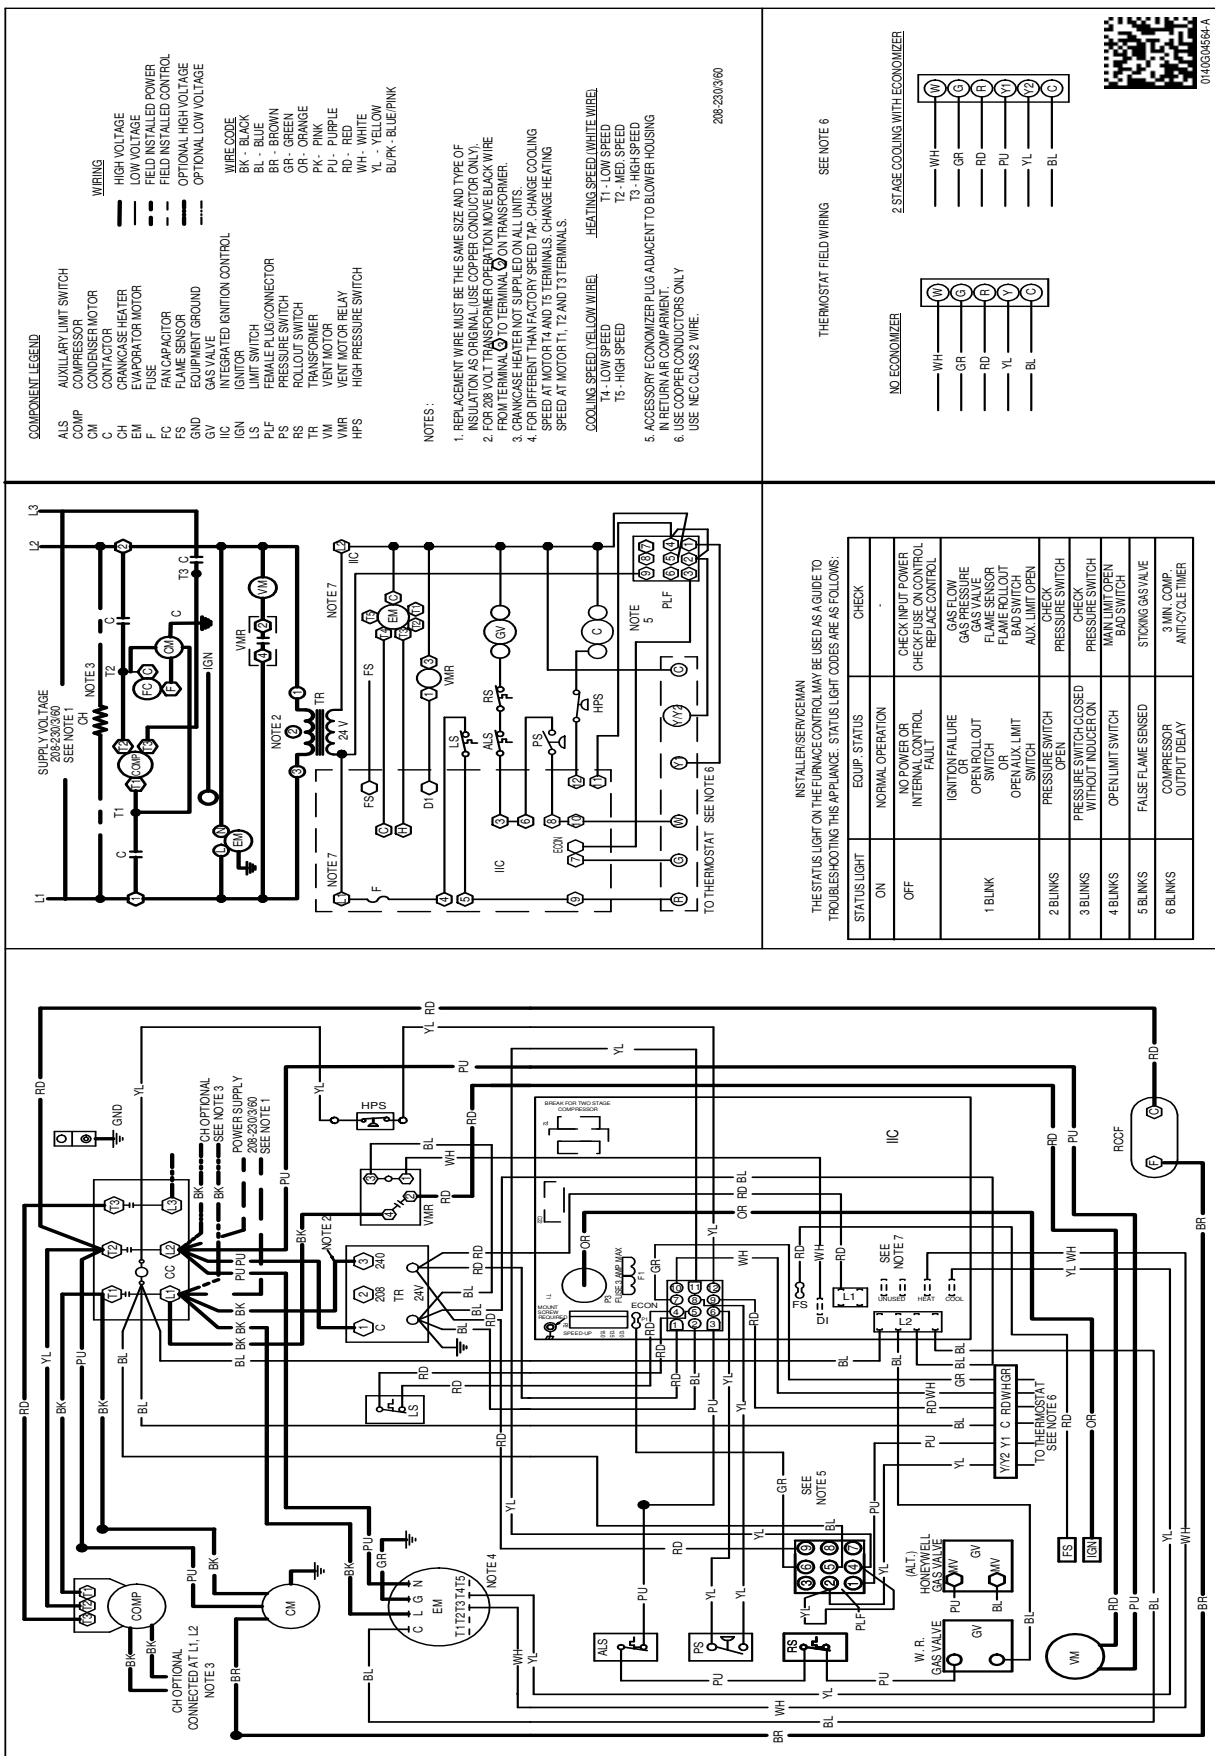


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

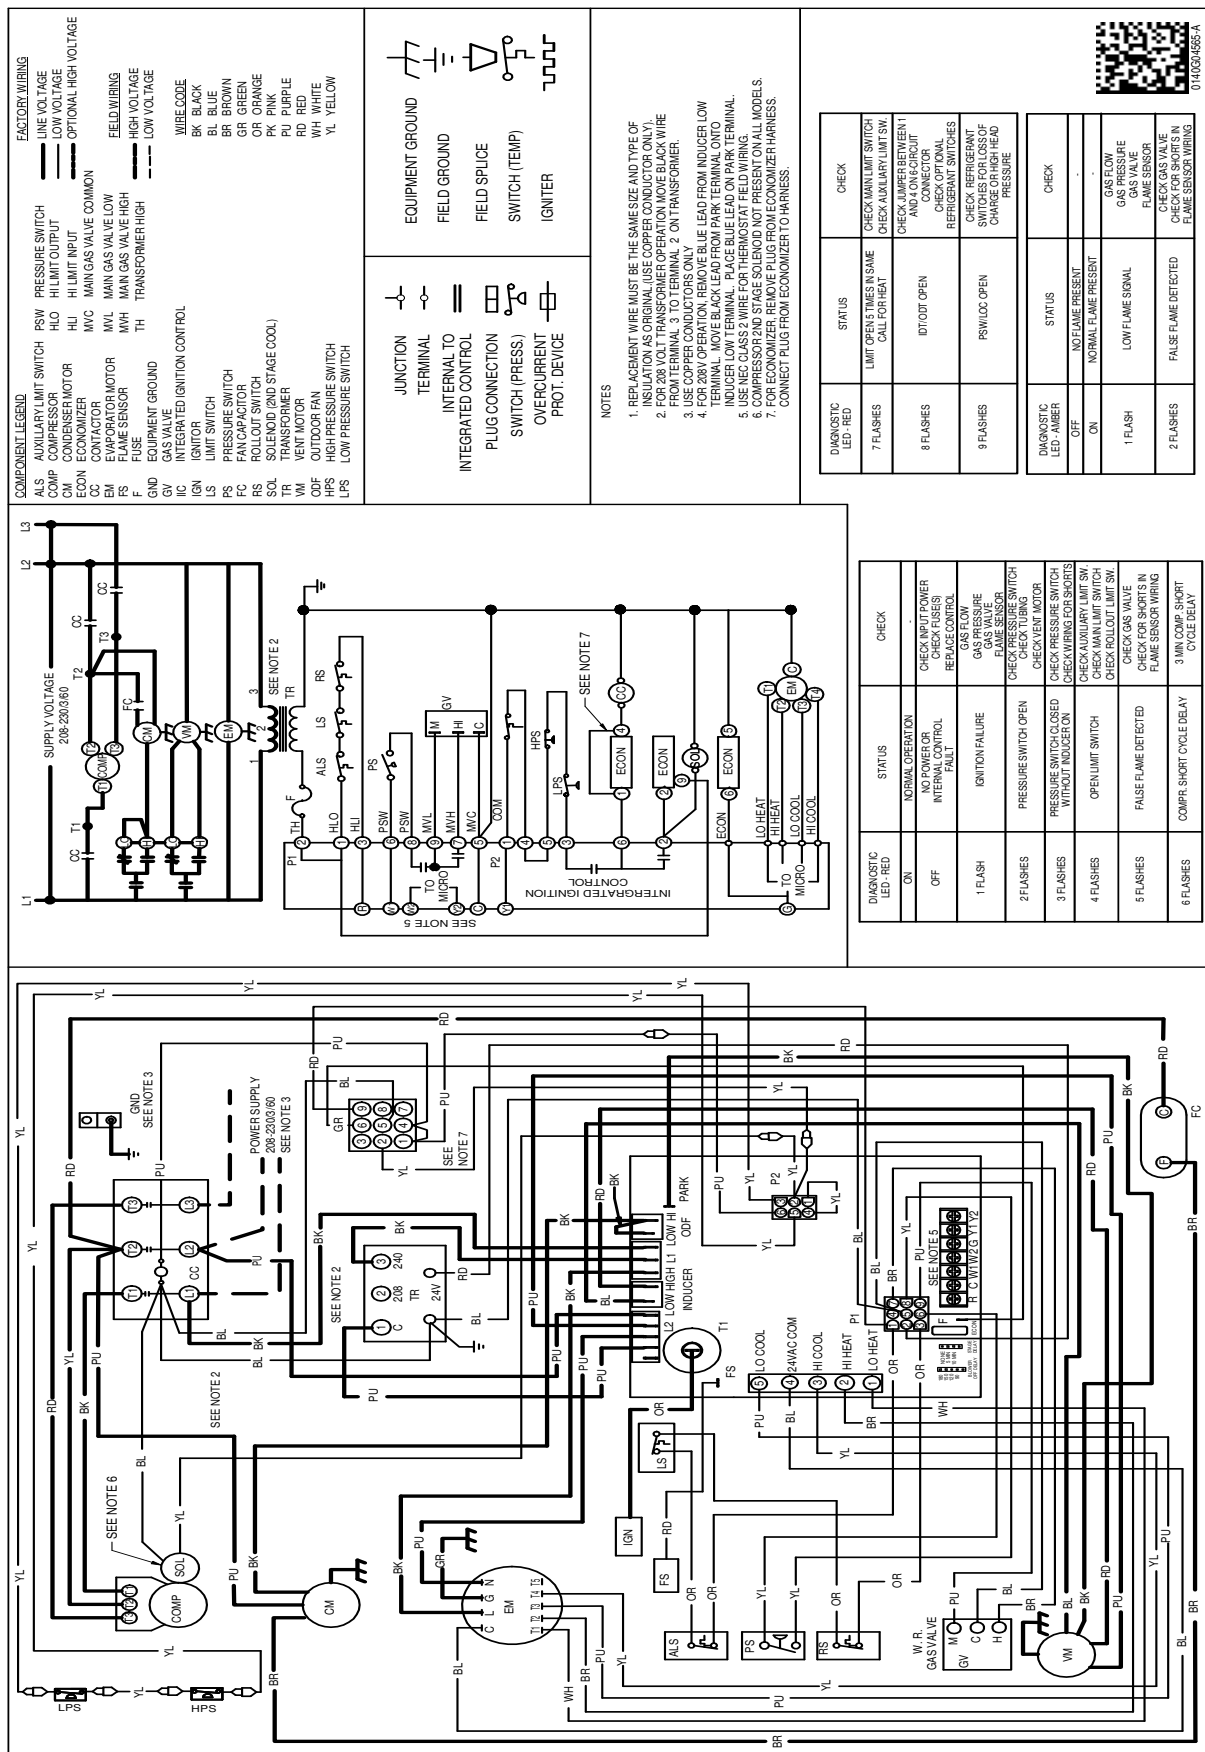

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

 **WARNING**

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

ITEM	DESCRIPTION	FITS CHASSIS SIZE
20464501NGK	Horizontal Duct Cover	Medium
20464502NGK	Horizontal Duct Cover	Large
CDK36	Concentric Kit	Medium
CDK4872	Concentric Kit	Large
DDNECNJPGMM	Downflow Economizer	Medium
DDNECNJPGML	Downflow Economizer	Large
DDNIFRPGMM	Downflow Internal Filter Rack (with economizer)	Medium
DDNIFRPGA	Downflow Internal Filter Rack (no economizer)	All Sizes
DHZECNJPCHM	Horizontal Economizer	Medium
DHZECNJPCHL	Horizontal Economizer	Large
DPHFRA	External Horizontal Filter Rack	All Sizes
DHZIFRPGCHA	Internal Horizontal Filter Rack	All Sizes
DDN25FDPGCHMM	25% Manual Downflow Fresh Air Damper	Medium
DDN25FDPGCHML	25% Manual Downflow Fresh Air Damper	Large
DHZ25FDPGCHMM	25% Manual Horizontal Fresh Air Damper	Medium
DHZ25FDPGCHML	25% Manual Horizontal Fresh Air Damper	Large
DDN25MFDPGCHMM	25% Motorized Downflow Fresh Air Damper	Medium
DDN25MFDPGCHML	25% Motorized Downflow Fresh Air Damper	Large
DHZ25MFDPGCHMM	25% Motorized Horizontal Fresh Air Damper	Medium
DHZ25MFDPGCHML	25% Motorized Horizontal Fresh Air Damper	Large
HA-03	High-Altitude Kit	All Sizes
LPM-07	LP Conversion Kit (Single-Stage Models)	3 and 4 ton models
LPM-08	LP Conversion Kit (Two-Stage Models)	5 ton models
OTDFPKG-01	Outdoor Thermostat with Housing	All Sizes
D14CRBPGCHMA	Roof Curb	All Sizes
SQRPG101/102	Square-to-Round Adapter w/16" Round for Downflow Application	Medium
SQRPG103	Square-to-Round Adapter w/18" Round for Downflow Application	Large
SQRPGH101/102	Square-to-Round Adapter w/16" Round for Horizontal Application	Medium
SQRPGH103	Square-to-Round Adapter w/18" Round for Horizontal Application	Large

