Job Name:	
Tag#	



Submittal Data Sheet

CTXS07LVJU

.5-Ton Wall Mounted Indoor Unit





Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*

Electrical		*208/230V
	Cooling	Heating
Running Current (Rated) (A)	.09/.08*	.11/ .10*
Power Consumption (Rated) (W)	18/18*	21/21*

Indoor Specifications					
	Cooling		Heating		
Airflow Rate (cfm)	Н		M	Н	M
	332		261	350	290
	L		SL	L	SL
	194		145	233	219
Sound (dBA) H / M / L / SL	38 / 32 / 25 / 22		38 / 33 / 28 / 25		
Dimensions (H × W × D) (in)		11-5/8 × 31-1/2 × 8-7/16			
Weight (Lbs)		20			
Nominal Capacity (Btu/hr)		7,000			
*See Outdoor Unit for Rated Capacities					

Piping			
Liquid (in)	1/4		
Gas (in)	3/8		
Drain (in)	5/8		

Optional Accessories




Included	Part Number	Description
	AZAI6WSCDKB	DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)
	AZAI6WSPDKC	DKN Plus Interface
	DTST-ONE-ADA-A	Daikin One+ Smart Thermostat for Ductless Products
	BRC944B2	Wired Remote Controller
	BRCW901A08	Wired Remote Controller Cable – 25ft
	BRCW901A03	Wired Remote Controller Cable – 10ft
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump
	KRP928BB2S	Interface Adaptor for DIII-NET
	KAF970A46	Air-purifying filter with photocatalytic deodorizing function (without frame)

Submittal Revision Date: October 2021 Page 1 of 2

CTXS07LVJU Dimensional Data



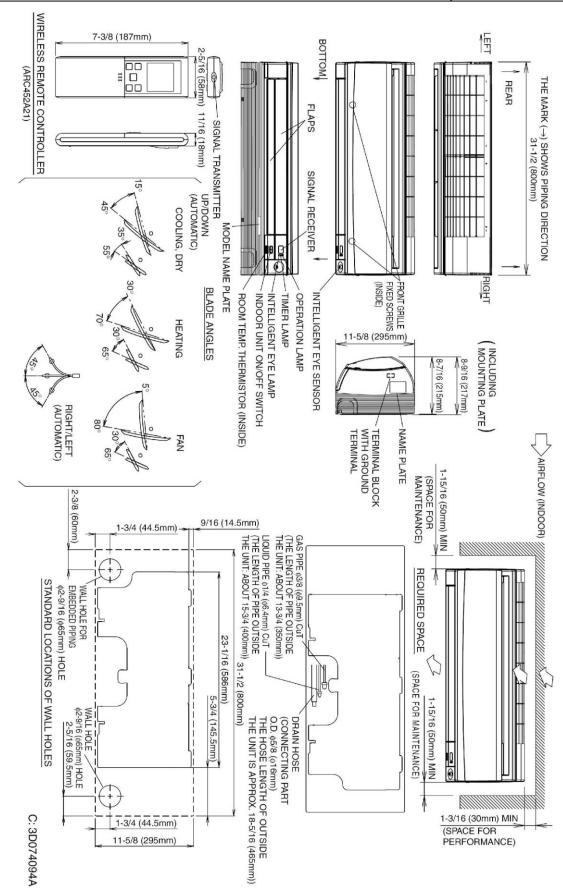

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: October 2021 Page 2 of 2